



*Total Solution Provider in Saw Device*

---

# SA481BM1

CDMA 450 F-Band, Balanced RF-Tx SAW Filter  
Revision 0: March 2009



- Electrical Characteristics
  - Package Dimensions
  - Testing Environment
  - Frequency Characteristics
- 

**SAWNICS Inc.**

---

460 Cheonheung-ri, Seonggeo-eup, Cheonan-si, Chungcheongnam-do, 330-836 / Korea.  
Tel: +82 41 550 9372 / Fax: +82 41 550 9399 / [www.sawnics.com](http://www.sawnics.com)

## □ Electrical Characteristics

### Maximum Ratings


Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-30	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	0
Source Impedance (balanced ended) <sup>(1)</sup>	Ω	-	100	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	M1			
Length x Width	mm <sup>2</sup>	-	3.0 x 3.0	-
Height	mm	-	-	1.3

### Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	481.2	-
Insertion Loss within 479.0 ~ 483.5 MHz	dB	-	2.3	2.8
<b>Stop Band Attenuation:</b>				
0.3 ~ 467.0 MHz	dB	40	50	-
489.0 ~ 493.5 MHz	dB	30	38	-
493.5 ~ 1700.0 MHz	dB	35	45	-
1700.0 ~ 2000.0 MHz	dB	35	45	-
VSWR within 479.0 ~ 483.5 MHz	-	-	2.1	2.5

**Notes :** (1) No Matching Network .


**Package Dimensions**

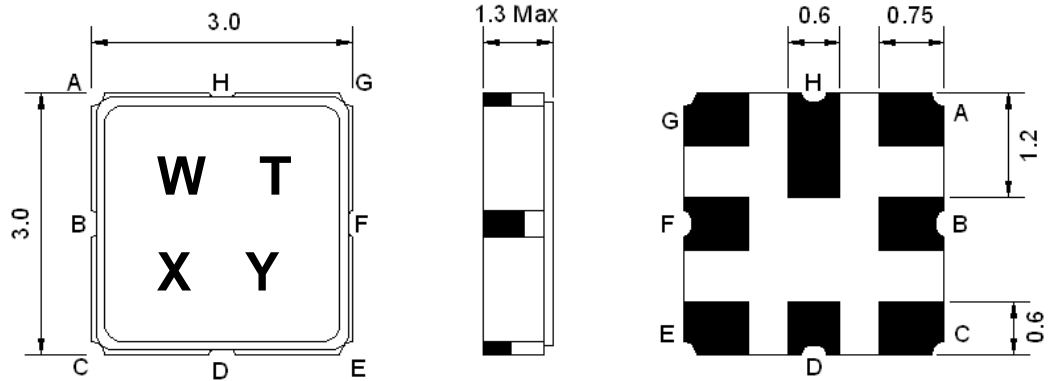

Marking Descriptions	
W	CDMA450 Application
T	Series Number
X	Date Code(Year)
Y	Date Code(Month)

Pin Description	
B, D, E, G, H	Ground
A, C	In
F	Out

**Testing Environment**


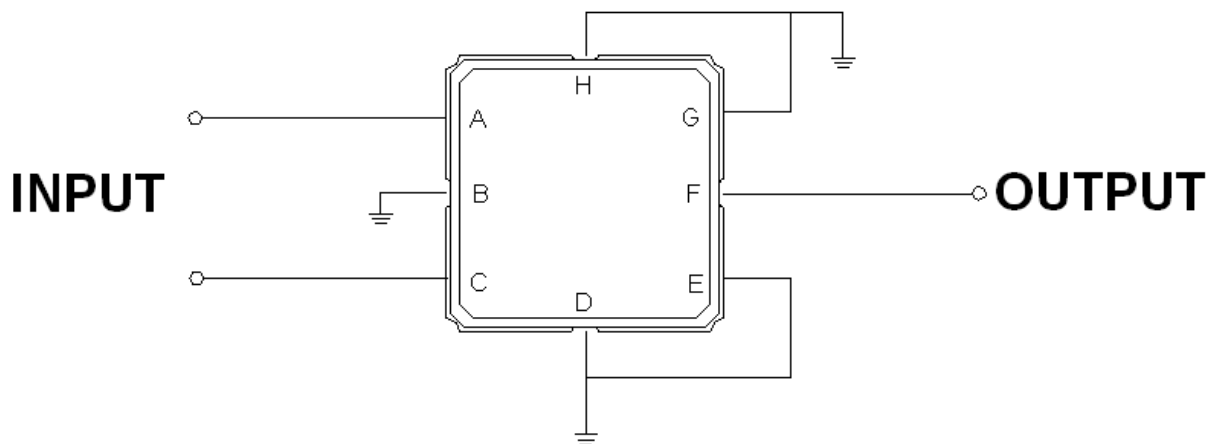


Source Impedance: 100 Ω

Load Impedance: 50 Ω

**□ Frequency Characteristics**



Frequency Response

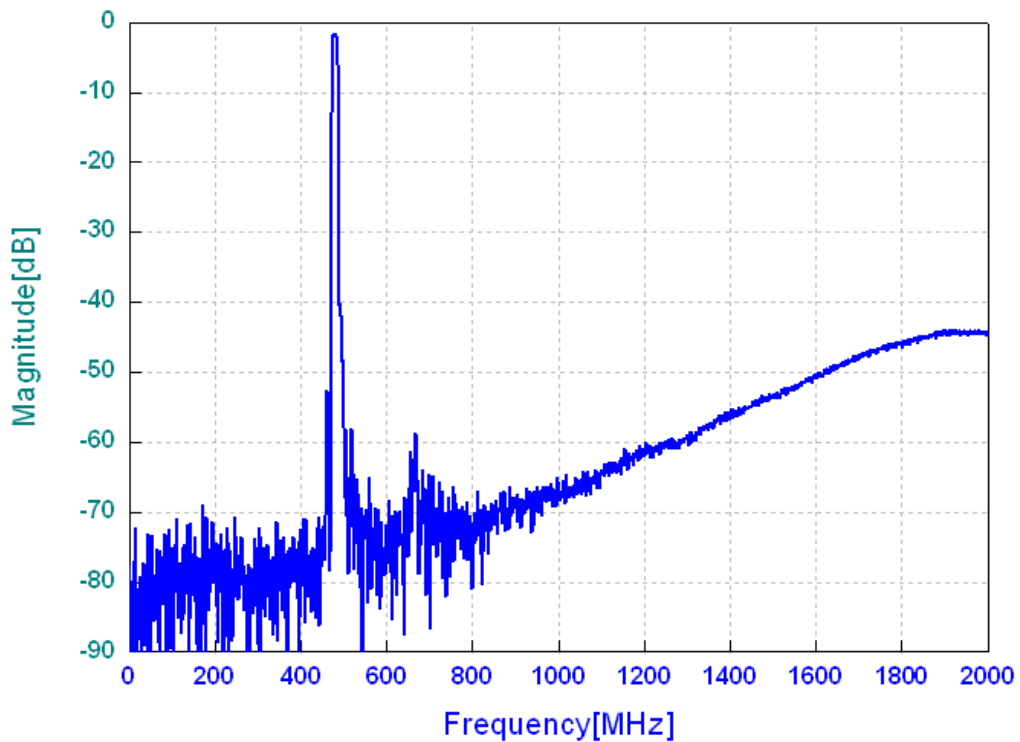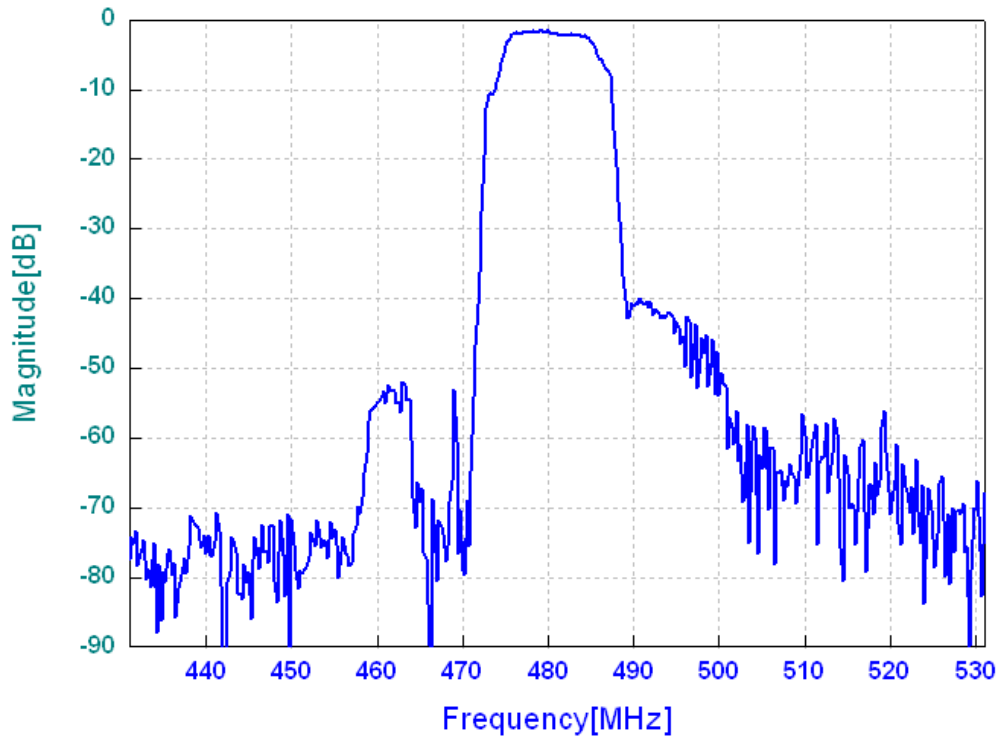

## SA481BM1

CDMA 450 F-Band, Balanced RF-Tx SAW Filter

### VSWR

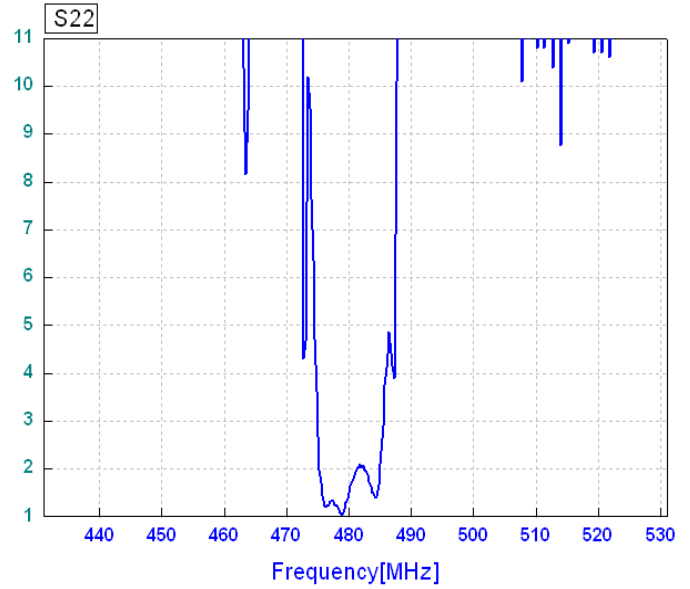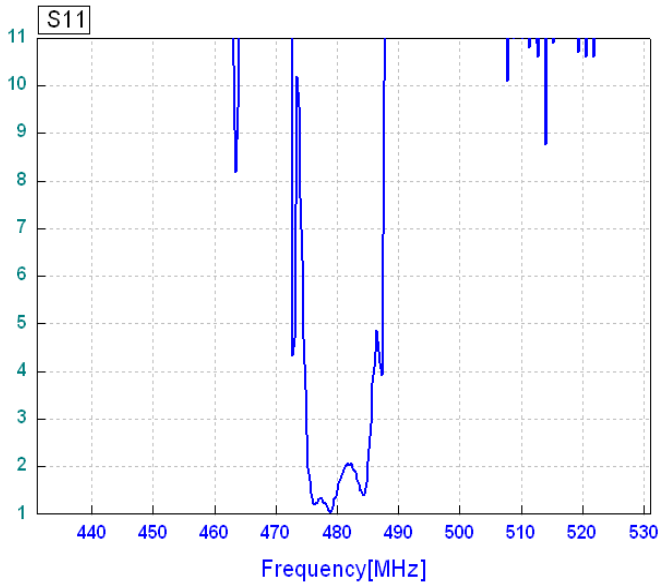

### Smith Chart

