



Total Solution Provider in Saw Device

SA08030AD1

80.0 MHz IF SAW Filter
30.20 MHz Bandwidth
Revision 0: 29. August. 2008



- Electrical Characteristics
 - Package Dimensions
 - Testing Environment
 - Frequency Characteristics
-

SAWNICS Inc.

460 Cheonheung-ri, Seonggeo-eup, Cheonan-si, Chungcheongnam-do, 330-836 / Korea.
Tel: +82 41 550 9372 / Fax: +82 41 550 9399 / www.sawnics.com



□ Electrical Characteristics

Maximum Ratings

Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-	25	-
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	D1			
Length x Width	mm ²	-	20.0 x 9.8	-
Height	mm	-	-	1.8


Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	80.0	-
Insertion Loss at Fo	dB	-	25.70	28.00
Group Delay Variation at Fo ± 14.75 MHz	nsec	-	25	60
Absolute Delay at Fo	usec	-	1.78	-
Passband Ripple Variation at Fo ± 14.75 MHz	dB	-	0.55	0.90
Bandwidth at -1dB	MHz	29.90	30.20	-
Bandwidth at -3dB	MHz	-	30.60	-
Bandwidth at -25dB	MHz	-	32.22	-
Bandwidth at -40dB	MHz	-	32.65	32.90
Relative Attenuation				
Lower Sidelobe	dB	48	52	-
Upper Sidelobe	dB	48	52	-
Temperature Coefficient	ppm/°C	-	-72	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).

Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

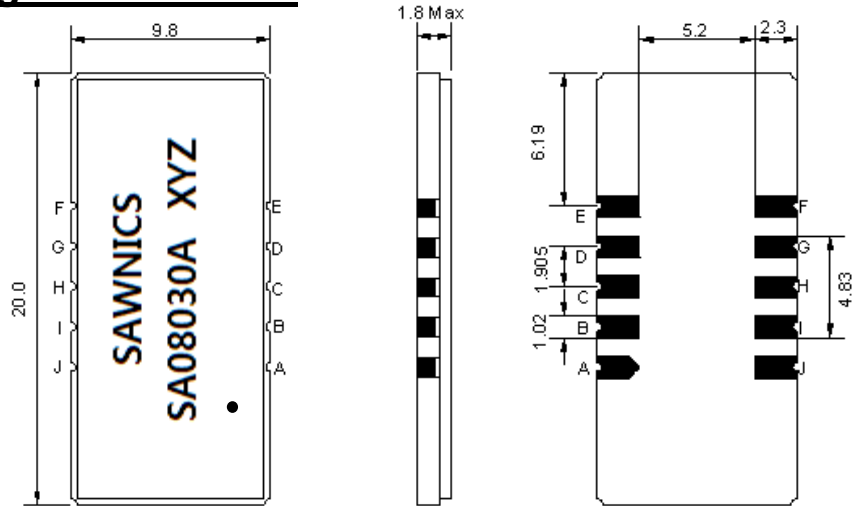

- ① SAWNICS: Brand
- ② SA08030A: Model Name
- ③ X : Date Code (Year)
- ④ Y : Date Code (Month)
- ⑤ Z : Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

Testing Environment

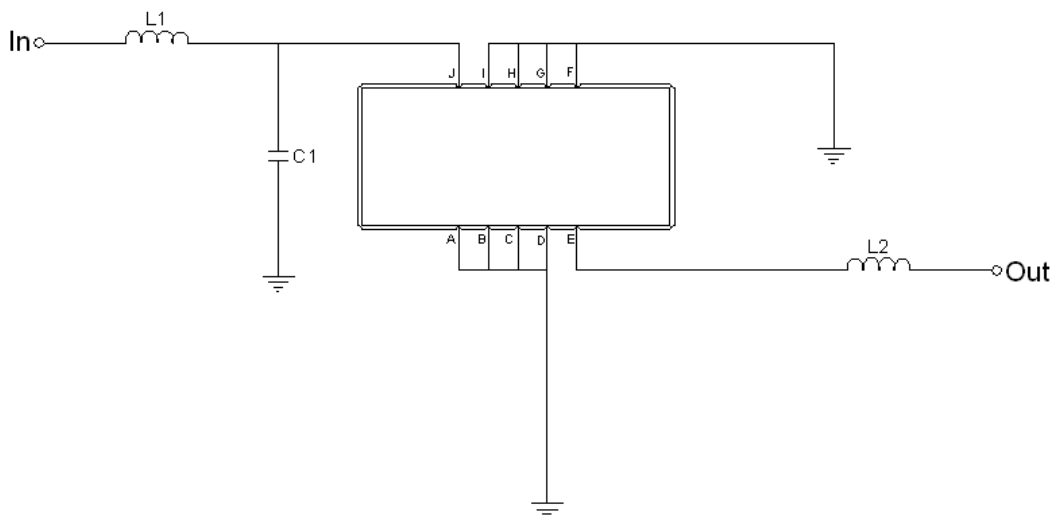


Test Fixture & Values	
Input	L1 = 120 nH, C2 = 3.3 pF
Output	L2 = 150 nH
Source/Load Impedance	50 Ω




Frequency Characteristics

Frequency Response


Bandwidth at -1.0 dB

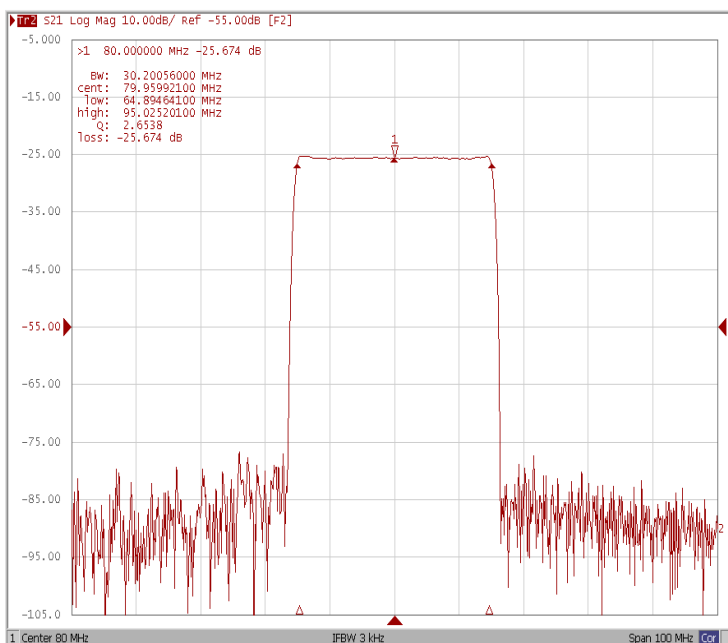


Bandwidth at -3.0 dB

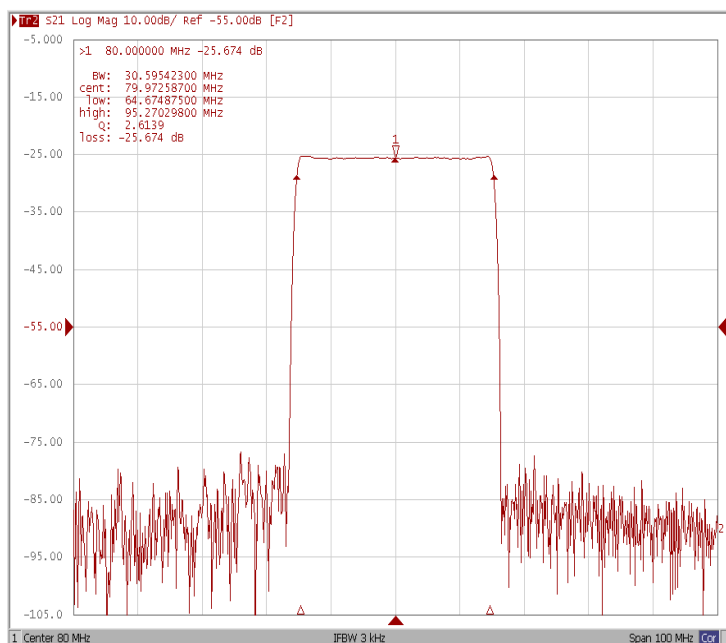

Bandwidth at -40.0 dB

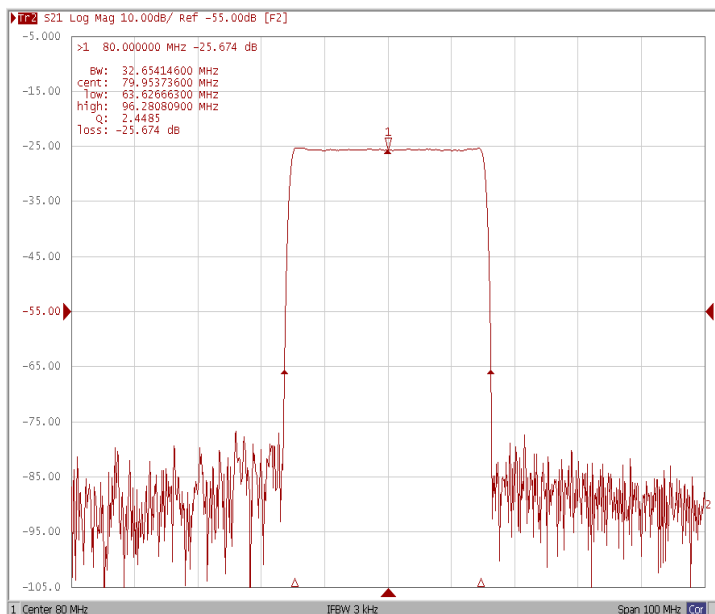

Wide-Band

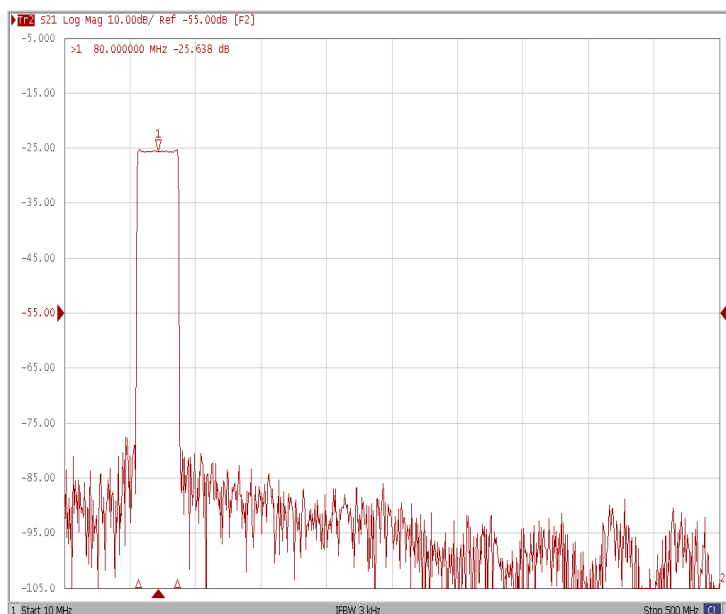





Frequency Characteristics

Frequency Response


Ripple Variation Fo±14.75 MHz

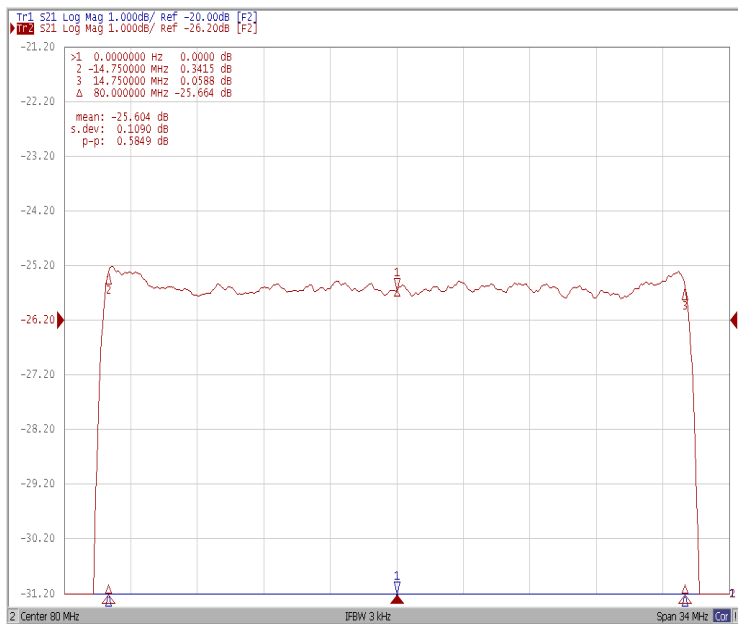

Group Delay Variation Fo±14.75MHz

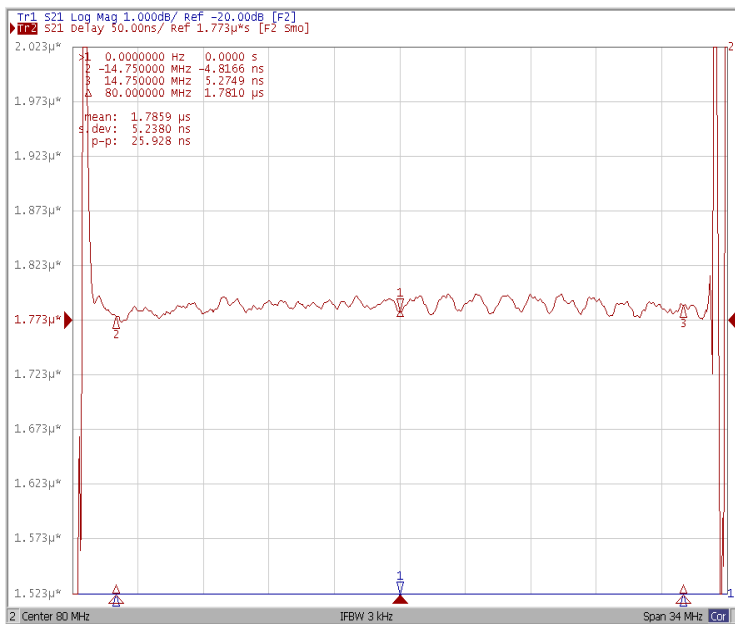

Smith Chart

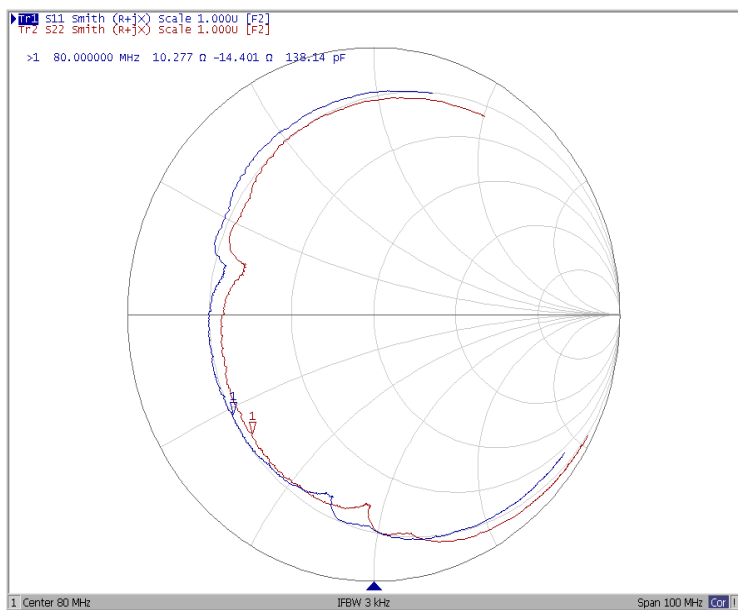

VSWR

