



Total Solution Provider in Saw Device

SA08426AV

84.0 MHz IF SAW Filter
26.2 MHz Bandwidth
Revision 0: 3. APR. 2008



-
- Electrical Characteristics
 - Package Dimensions
 - Testing Environment
 - Frequency Characteristics
-

SAWNICS Inc.

460 Cheonheung-ri, Seonggeo-eup, Cheonan-si, Chungcheongnam-do, 330-836 / Korea.
Tel: +82 41 550 9372 / Fax: +82 41 550 9399 / www.sawnics.com

□ Electrical Characteristics

Maximum Ratings


Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	0		70
Storage Temperature Range	°C	-30	-	80
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	V			
Length x Width	mm ²	-	13.3 x 6.5	-
Height	mm	-	-	1.8

Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	84.0	-
Insertion Loss at Fo	dB	-	26.0	28.0
Group Delay Variation (Fo±12.5MHz)	ns	-	30	80
Absolute Delay	us	-	1.42	-
Passband Ripple (Fo±12.5MHz)	dB	-	0.65	1.0
Bandwidth at -1dB	MHz	24.96	26.2	-
Bandwidth at -10dB	MHz	-	27.6	27.9
Bandwidth at -20dB	MHz	-	28.2	28.5
Bandwidth at -30dB	MHz	-	28.6	28.9
Bandwidth at -45dB	MHz	-	28.9	-
Ultimate Rejection	dB	40	45	-
Temperature Coefficient of Frequency	ppm/°C		-72	

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

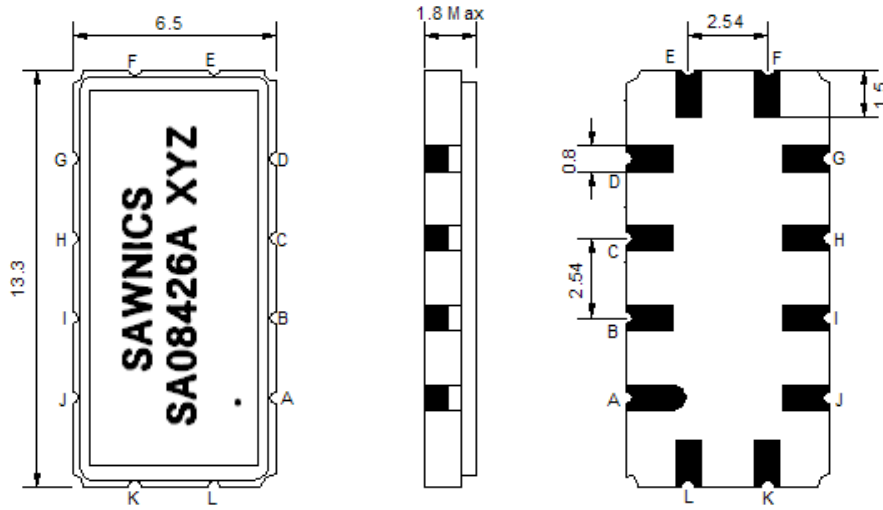

- ① SAWNICS: Brand
- ② SA08426A: Model Name
- ③ X : Date Code (Year)
- ④ Y : Date Code (Month)
- ⑤ Z : Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

Testing Environment

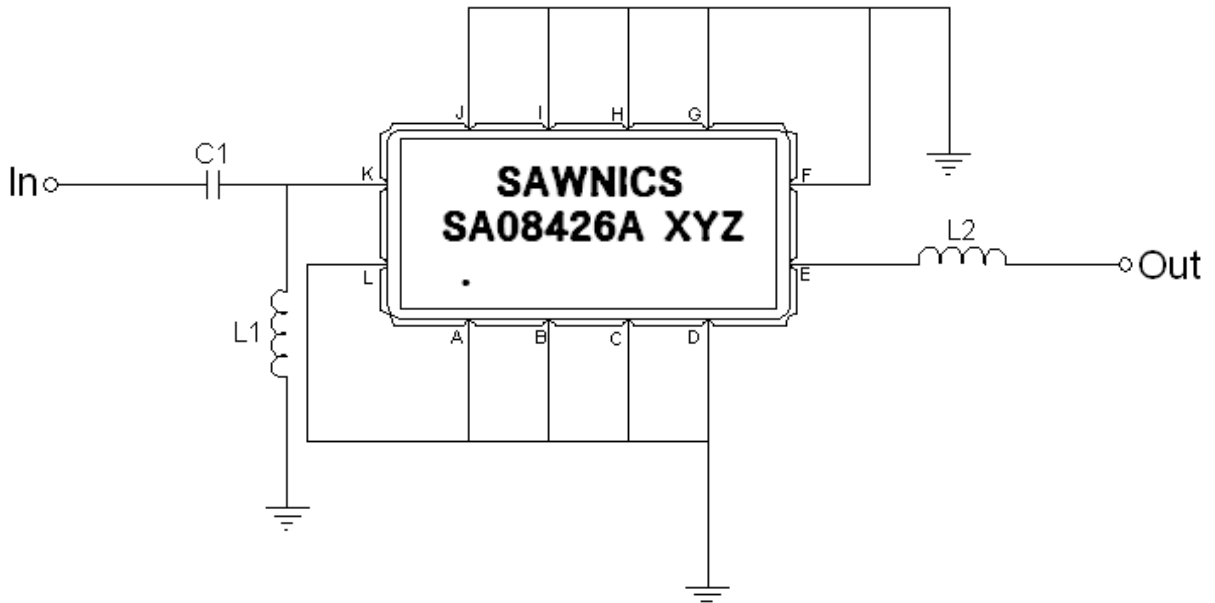



Test Fixture & Values	
Input	L1=120 nH, C1=51 pF
Output	L2=180 nH
Source/Load Impedance	50 Ω

□ Frequency Characteristics

Frequency Response



Bandwidth at -1.0 dB

Bandwidth at -10.0 dB

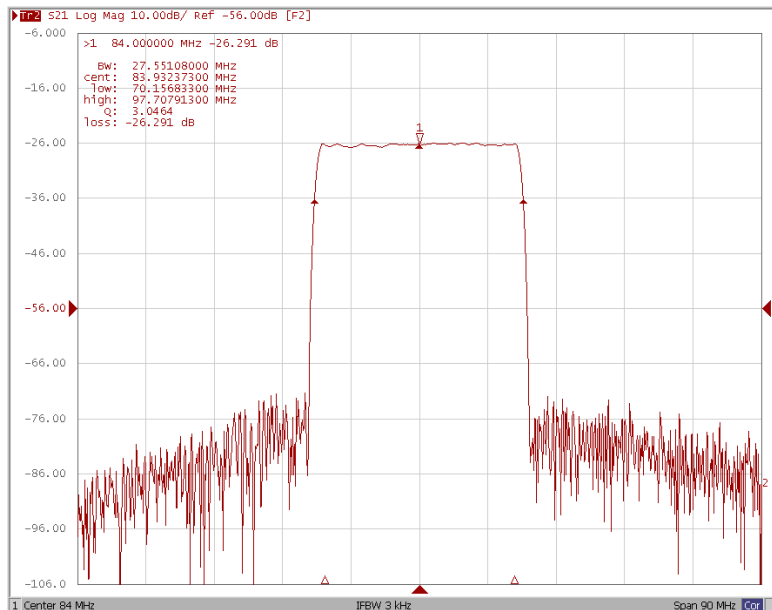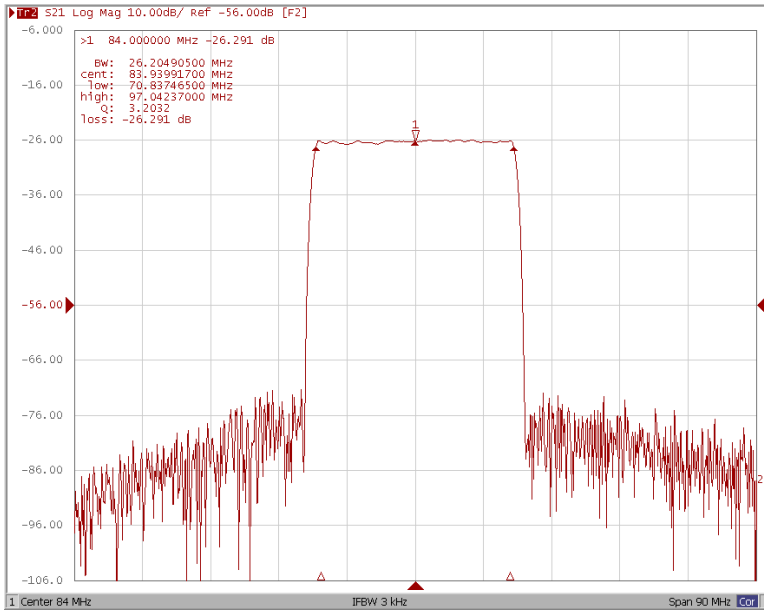

Bandwidth at -20.0 dB

Bandwidth at -45.0 dB

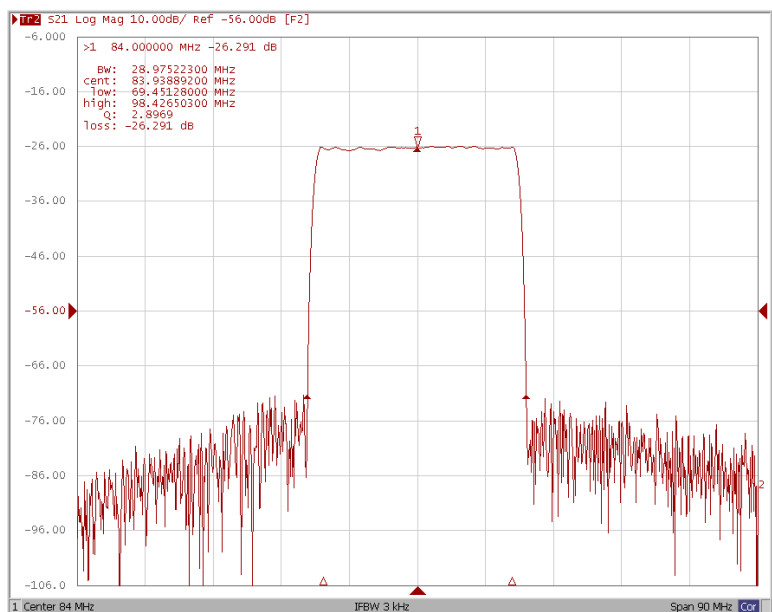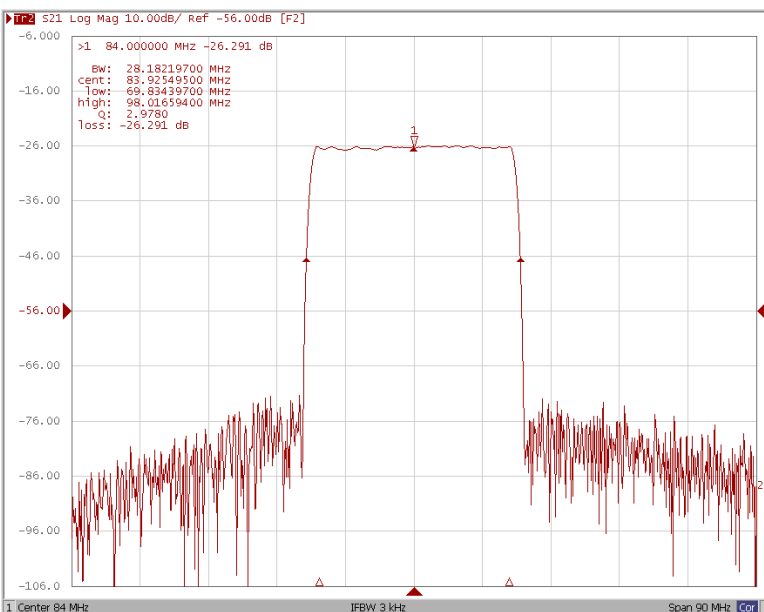





Frequency Characteristics

Frequency Response

Ripple Variation Fo±12.5MHz

Group Delay Variation Fo±12.5MHz

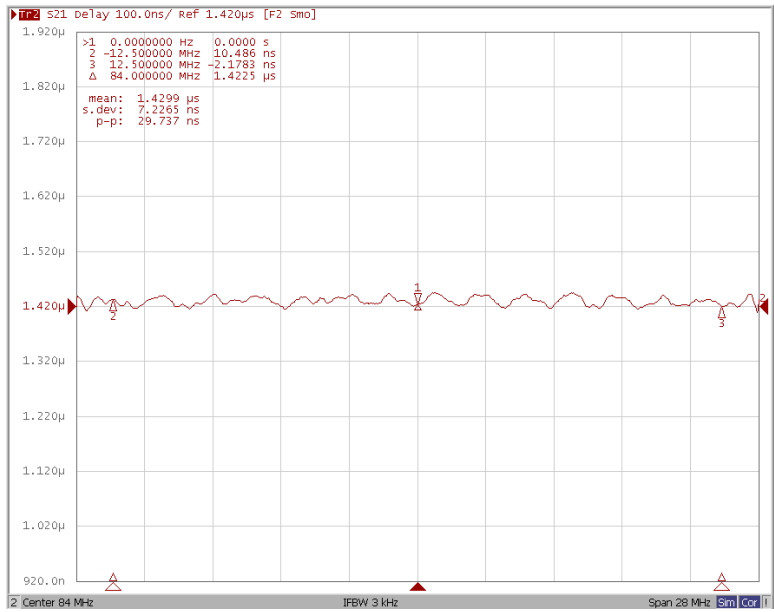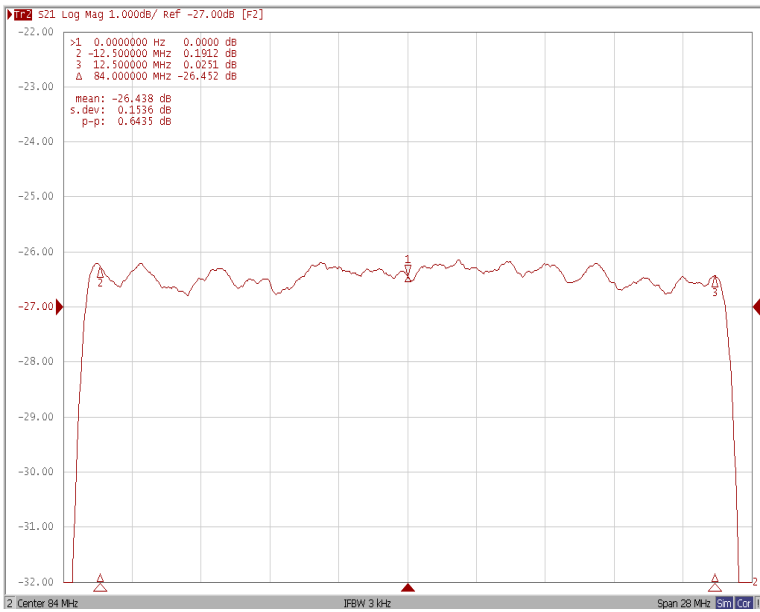

Smith Chart

VSWR

