



Total Solution Provider in Saw Device

SA12530AD

125.0MHz IF SAW Filter
29.98MHz Bandwidth
Revision 0: 17. July. 2008



- Electrical Characteristics
 - Package Dimensions
 - Testing Environment
 - Frequency Characteristics
-

SAWNICS Inc.

460 Cheonheung-ri, Seonggeo-eup, Cheonan-si, Chungcheongnam-do, 330-836 / Korea.
Tel: +82 41 550 9372 / Fax: +82 41 550 9399 / www.sawnics.com

□ Electrical Characteristics

Maximum Ratings


Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-	25	-
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	D			
Length x Width	mm ²	-	20.0x12.6	-
Height	mm	-	-	5.05

Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	125.0	-
Insertion Loss at Fo	dB	-	24.3	26.0
Amplitude Ripple Variation within Fo ±14.80 MHz	dB _{p-p}	-	0.65	1.0
Group Delay Variation within Fo ±14.80 MHz	nsec	-	30	60
Absolute Delay at Fo	µsec	-	1.89	-
Temperature Coefficient	ppm/°C	-	-72	-
Bandwidth at -1.0 dB	MHz	29.90	29.98	-
Bandwidth at -3.0 dB	MHz	-	30.30	-
Bandwidth at -40.0 dB	MHz	-	31.75	31.90
Attenuation Rejection				
Lower Sidelobe	dB	50	52	
Upper Sidelobe	dB	50	52	


Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.

Package Dimensions

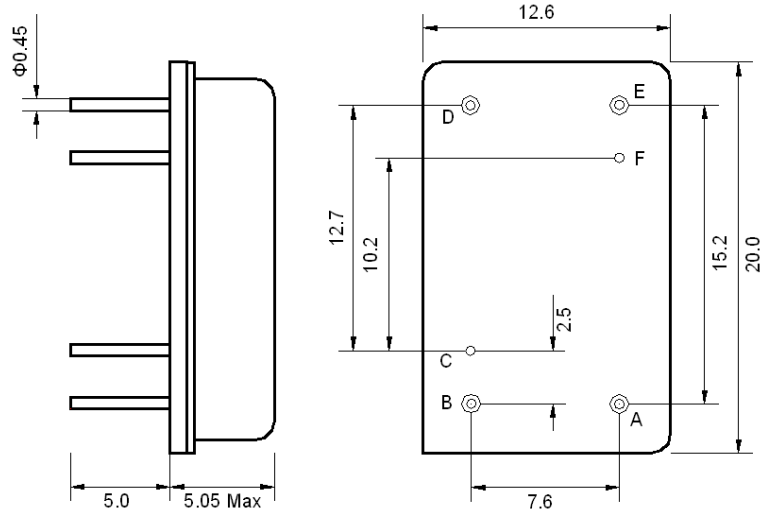

Pin Description	
B, C, D, F	Ground
A	Input
E	Output

Testing Environment

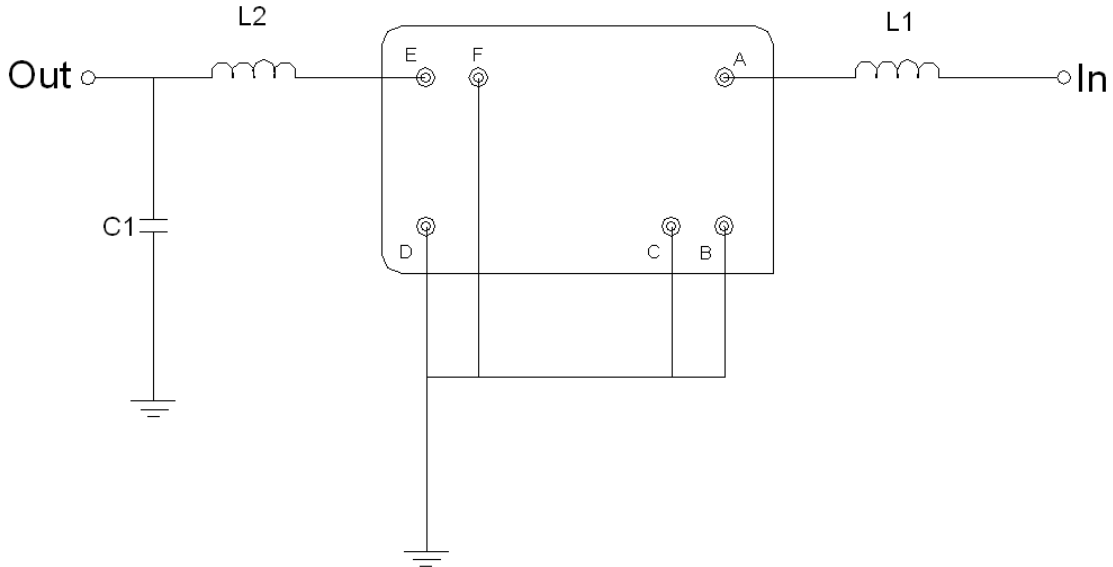


Test Fixture & Values	
Input	L1 = 47 nH
Output	L2 = 68 nH, C1 = 24 pF
Source/Load Impedance	50 Ω




Frequency Characteristics

Frequency Response


Bandwidth at -1.0 dB

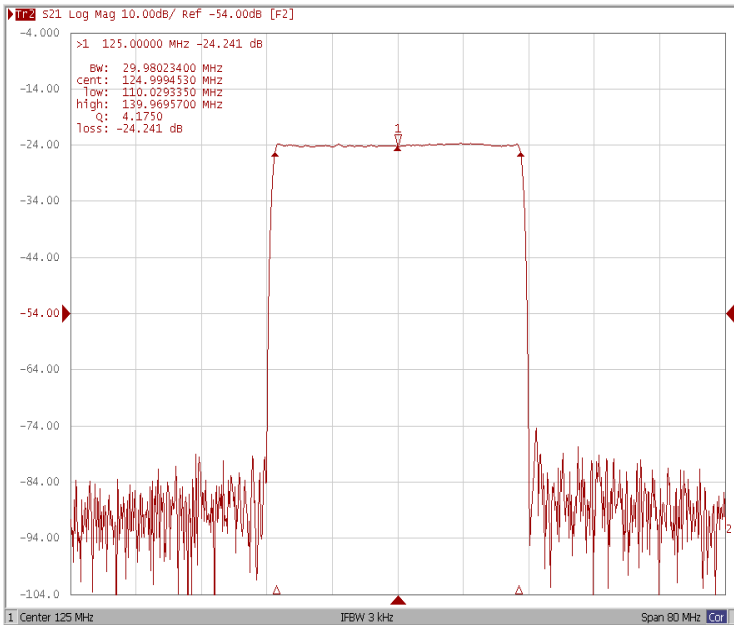


Bandwidth at -3.0 dB

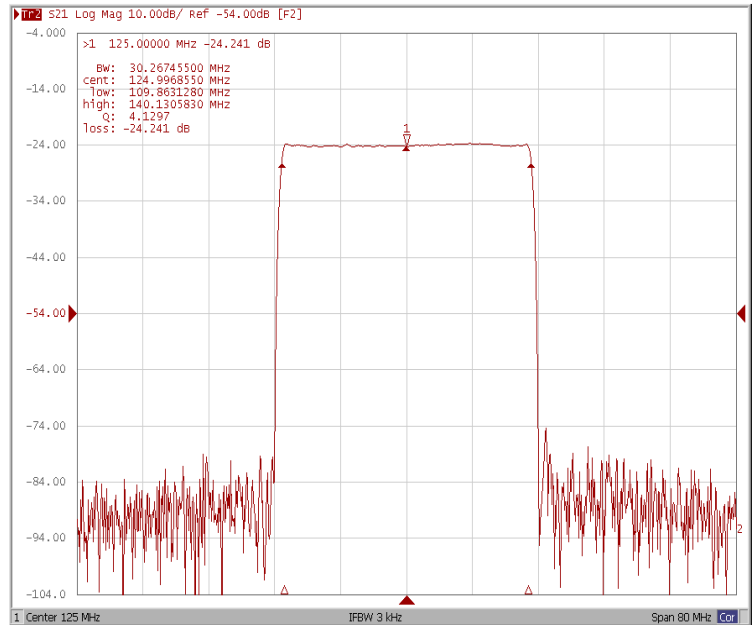

Bandwidth at -40.0 dB

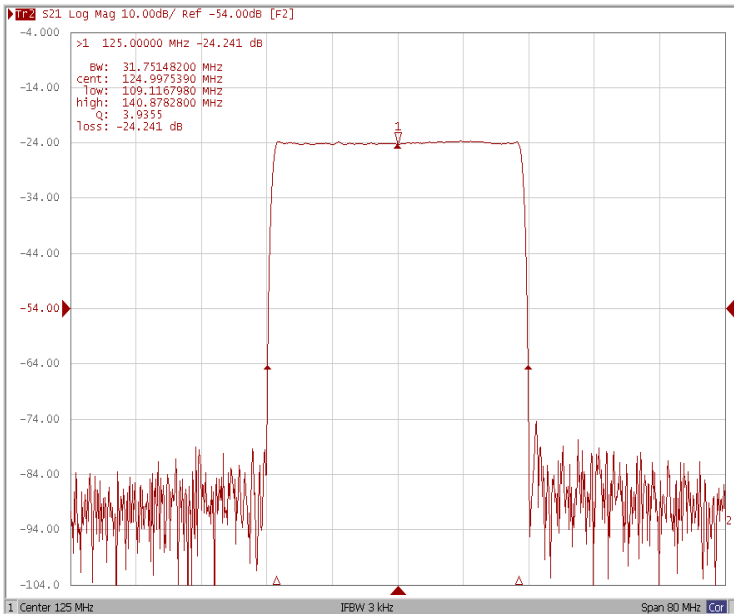

Wide-Band

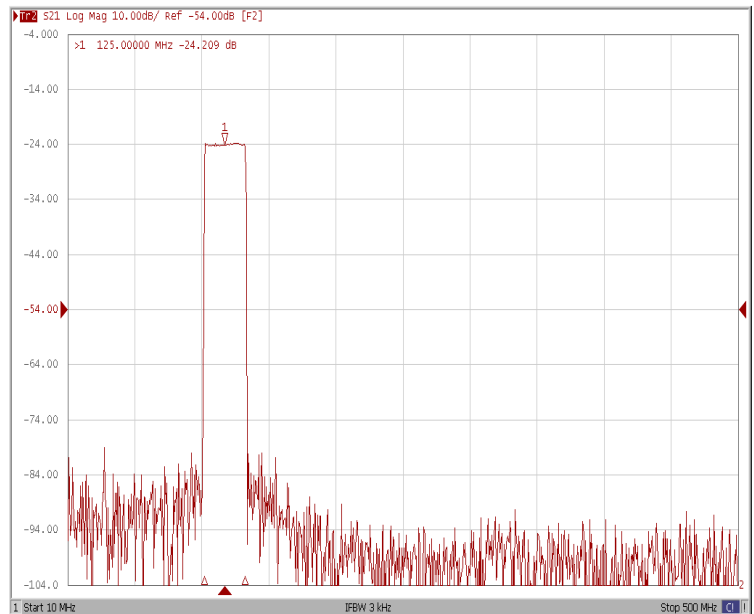





Frequency Characteristics

Frequency Response


Ripple Variation Fo±14.80MHz

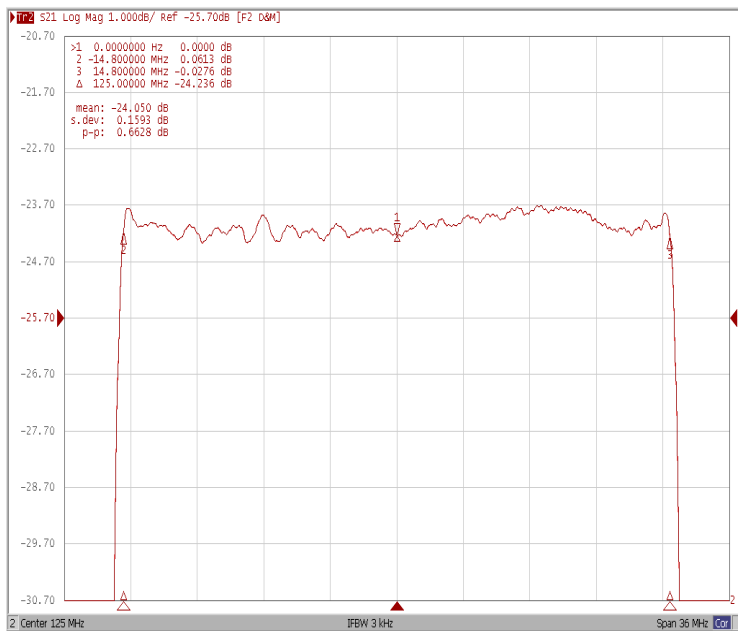

Group Delay Variation Fo±14.80MHz

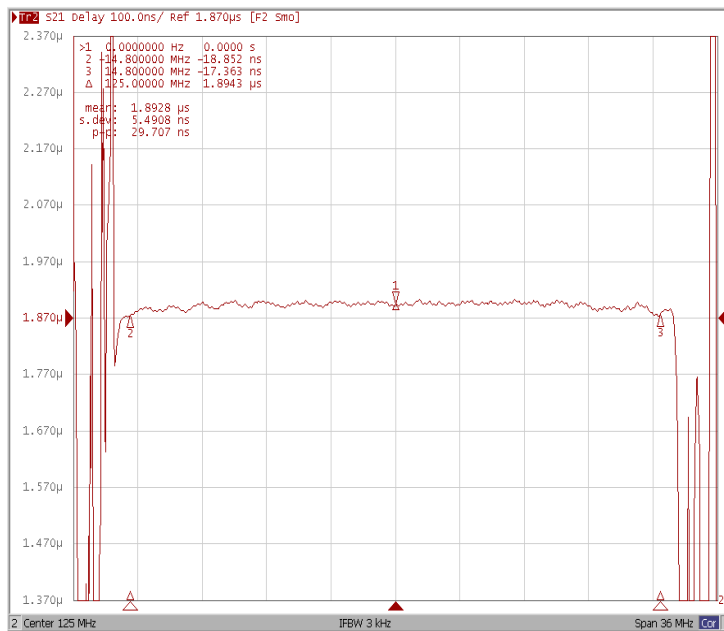

Smith Chart

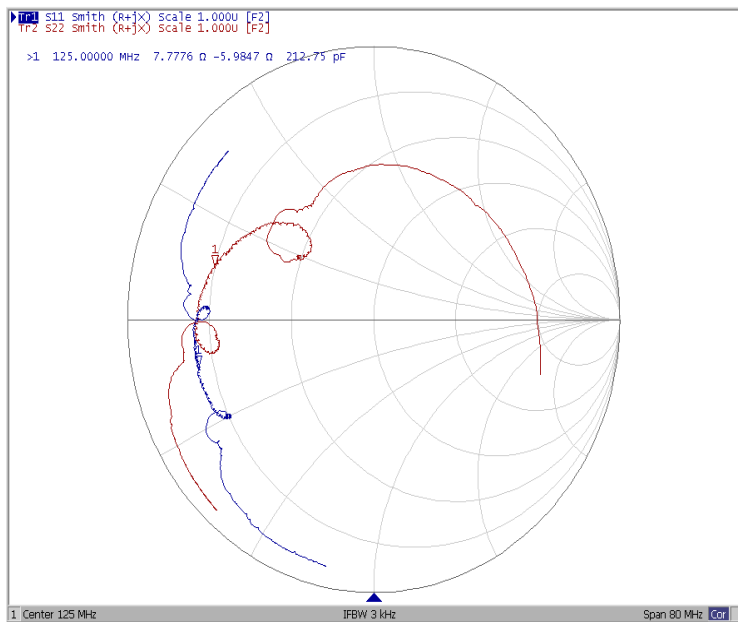

SWR

