



Total Solution Provider in Saw Device

SA18415AV

184.0 MHz IF SAW Filter
15.45 MHz Bandwidth
Revision 0: 31. MAR. 2008



- Electrical Characteristics
 - Package Dimensions
 - Testing Environment
 - Frequency Characteristics
-

SAWNICS Inc.

460 Cheonheung-ri, Seonggeo-eup, Cheonan-si, Chungcheongnam-do, 330-836 / Korea.
Tel: +82 41 550 9372 / Fax: +82 41 550 9399 / www.sawnics.com

□ Electrical Characteristics

Maximum Ratings


Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	20		50
Storage Temperature Range	°C	-45	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	V			
Length x Width	mm ²	-	13.3 x 6.5	-
Height	mm	-	-	1.8

Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	184.00	-
Insertion Loss at Fo	dB	-	28.5	30.0
Group Delay Variation (Fo±7.5MHz)	ns	-	40	80
Absolute Delay	us	-	2.00	-
Passband Ripple (Fo±7.5MHz)	dB	-	0.65	1.0
Bandwidth at -1dB	MHz	15.20	15.45	-
Bandwidth at -3dB	MHz	-	15.90	-
Bandwidth at -40dB	MHz	-	17.60	17.90
Ultimate Rejection	dB	45	50	-
Relative Attenuation Fo±9.0MHz	dB	45	55	-
Temperature Coefficient	ppm/°C	-	-18	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

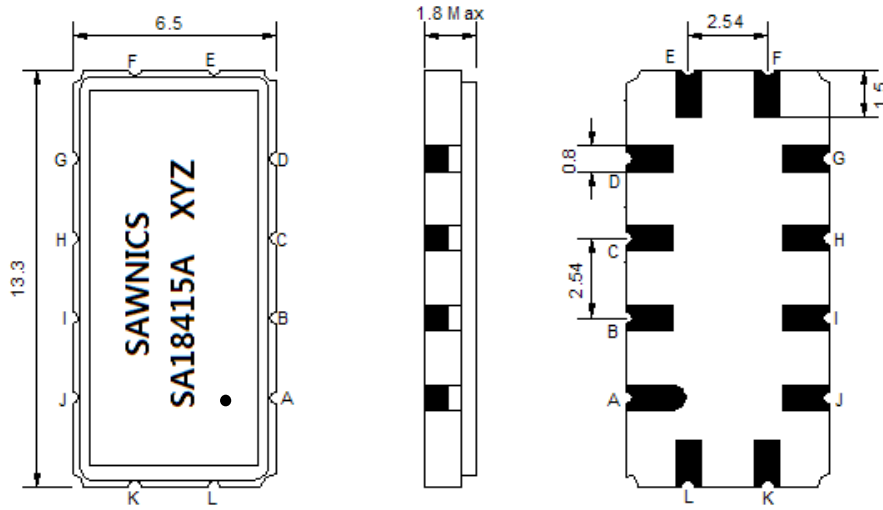

- ① SAWNICS: Brand
- ② SA18415A: Model Name
- ③ X : Date Code (Year)
- ④ Y : Date Code (Month)
- ⑤ Z : Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

Testing Environment

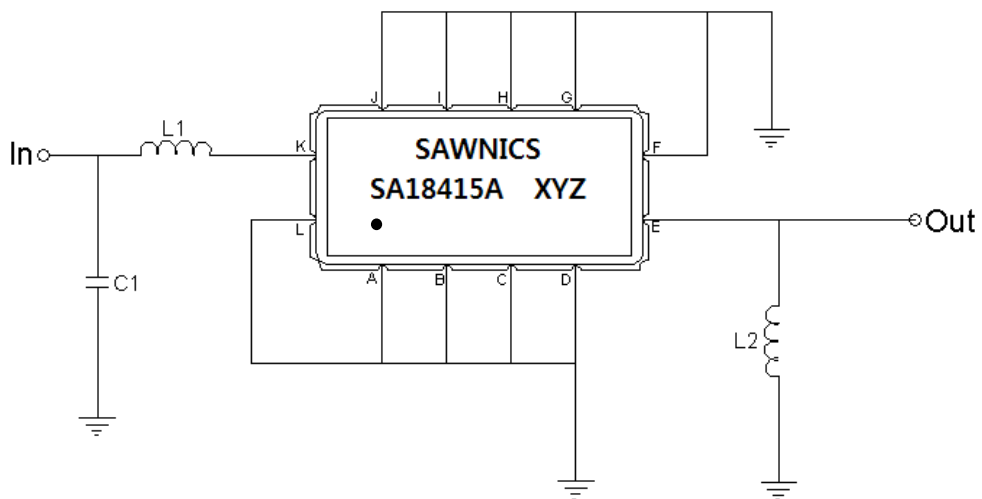



Test Fixture & Values	
Input	L1=39 nH, C1=24 pF
Output	L2=27 nH,
Source/Load Impedance	50 Ω

□ Frequency Characteristics

Frequency Response



Bandwidth at -1.0 dB

Bandwidth at -3.0 dB

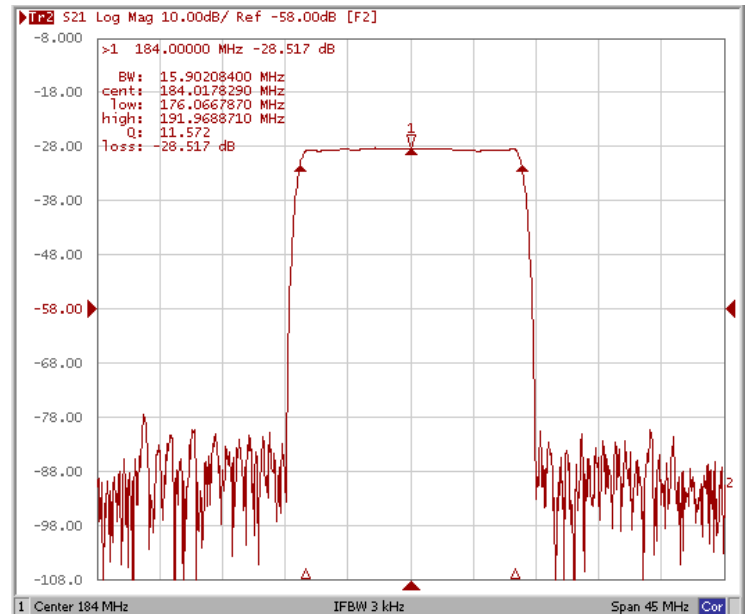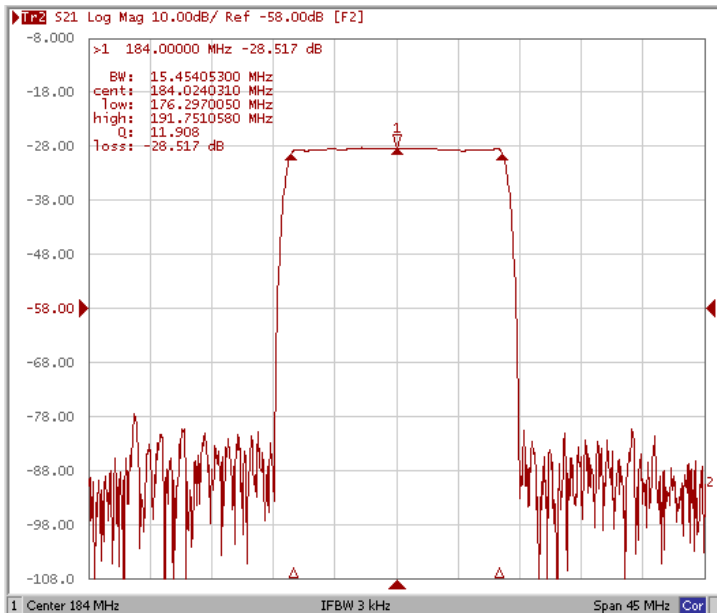

Bandwidth at -40.0 dB

Relative Attenuation $F_o \pm 9.0$ MHz

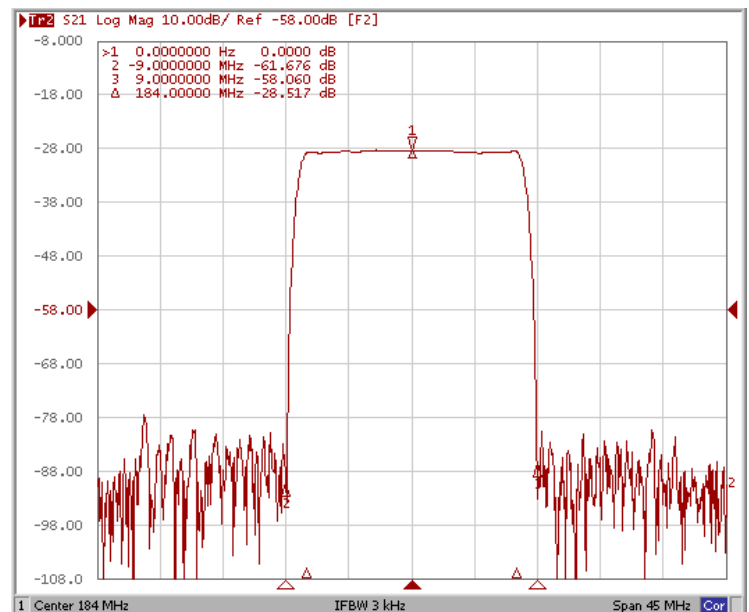
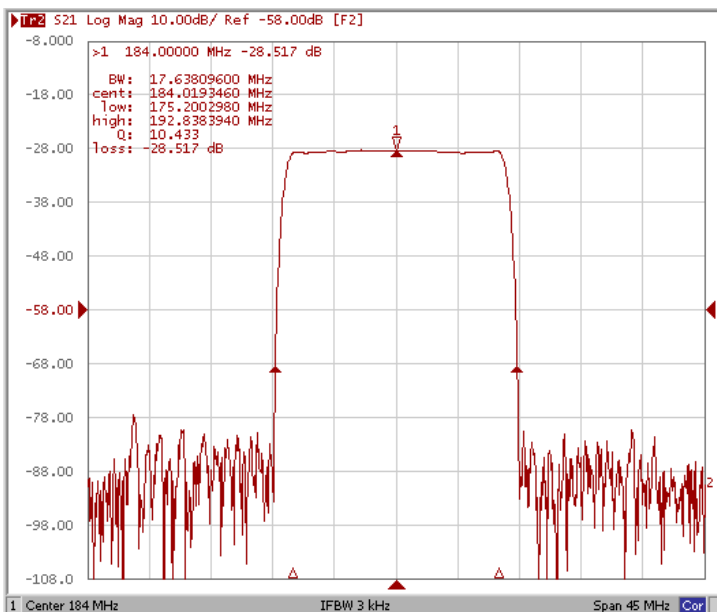


Frequency Characteristics

Frequency Response

Ripple Variation $F_o \pm 7.5\text{MHz}$

Group Delay Variation $F_o \pm 7.5\text{MHz}$

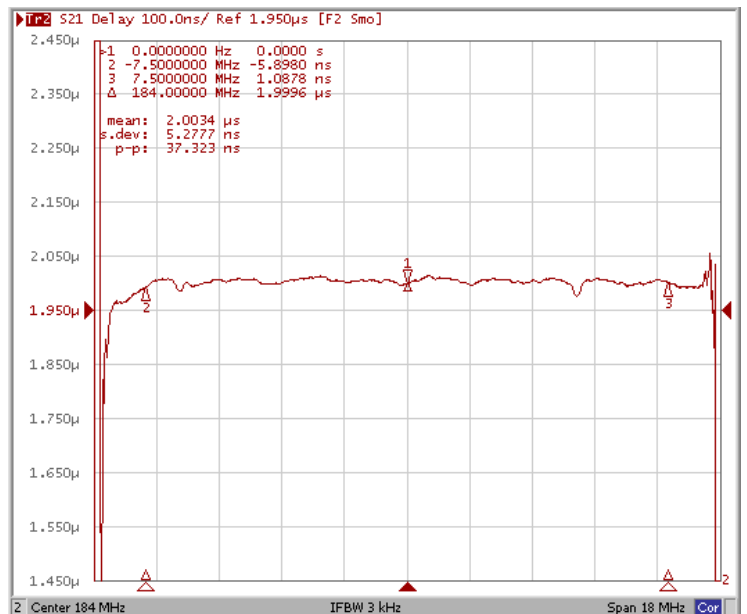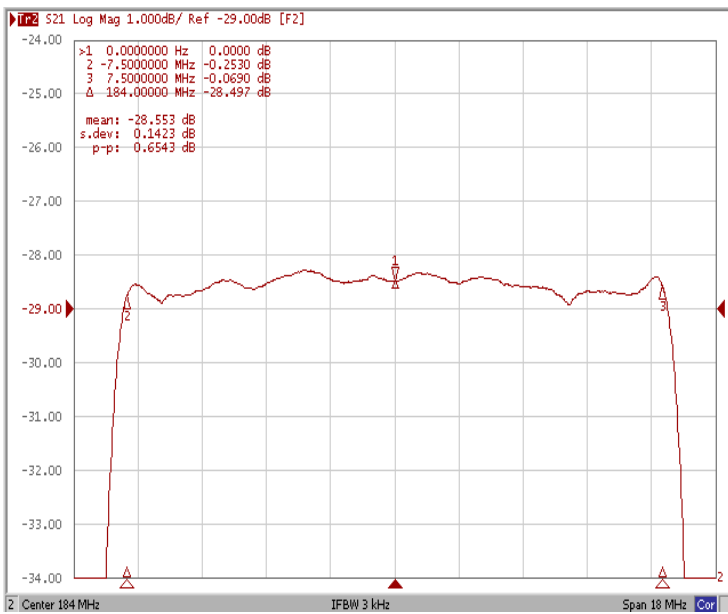

Smith Chart

VSWR

