



Total Solution Provider in Saw Device

SA19026BD1

190.0 MHz IF SAW Filter
26.40 MHz Bandwidth
Revision 0: 06.May. 2009



-
- Electrical Characteristics
 - Package Dimensions
 - Testing Environment
 - Frequency Characteristics
-

SAWNICS Inc.

460 Cheonheung-ri, Seonggeo-eup, Cheonan-si, Chungcheongnam-do, 330-836 / Korea.
Tel: +82 41 550 9372 / Fax: +82 41 550 9399 / www.sawnics.com

□ Electrical Characteristics

Maximum Ratings

Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-10	-	70
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	D1			
Length x Width	mm ²	-	20.0 x 9.8	-
Height	mm	-	-	1.8


Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	190.0	-
Insertion Loss at Fo	dB	-	29.30	30.80
Group Delay Variation (Fo±12.5MHz)	nsec	-	20	50
Absolute Delay	usec	-	2.40	2.50
Passband Ripple (Fo±12.5MHz)	dB	-	0.55	1.00
Bandwidth at -1dB	MHz	26.25	26.43	-
Bandwidth at -3dB	MHz	-	26.87	-
Bandwidth at -40dB	MHz	-	28.68	28.85
Bandwidth at -50dB	MHz	-	28.85	-
Ultimate Rejection	dB	50	55	
Temperature coefficient	ppm/°C	-	-20	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).

Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

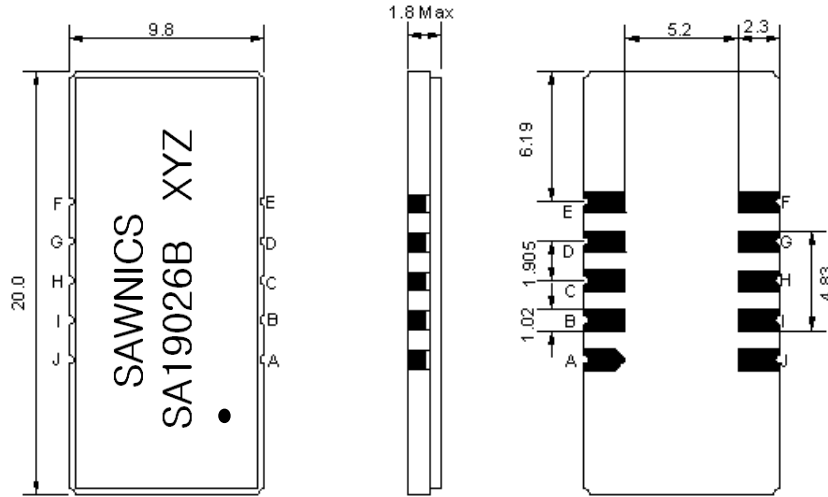

- ① SAWNICS: Brand
- ② SA19026B: Model Name
- ③ X : Date Code (Year)
- ④ Y : Date Code (Month)
- ⑤ Z : Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I	Ground
J	Input
E	Output

Testing Environment

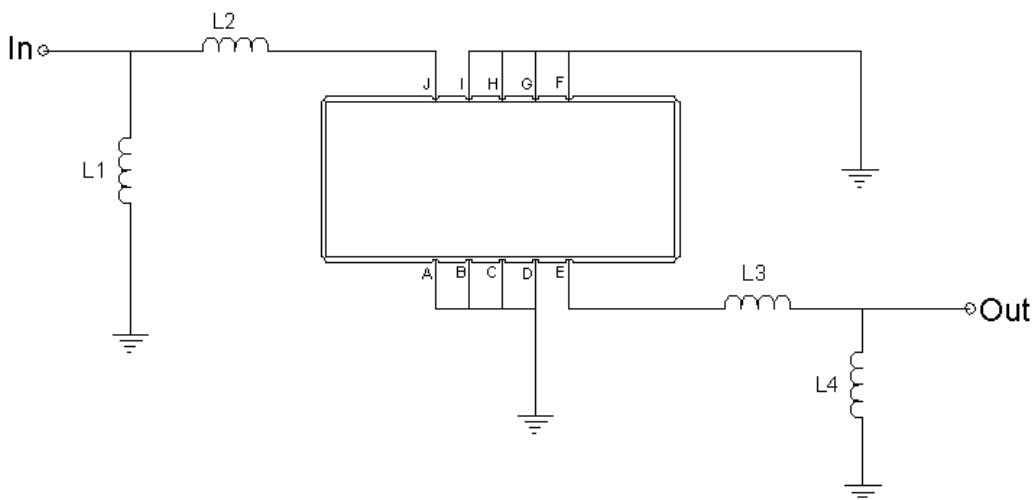


Test Fixture & Values	
Input	L1=15nH, L2=10nH
Output	L3=10nH, L4=18nH
Source/Load Impedance	50 Ω


□ Frequency Characteristics

Frequency Response


Bandwidth at -1.0 dB

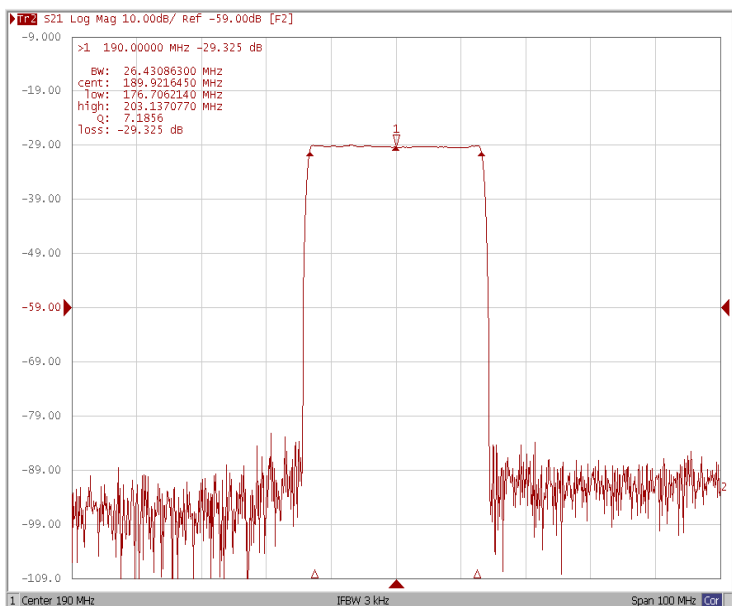


Bandwidth at -3.0 dB

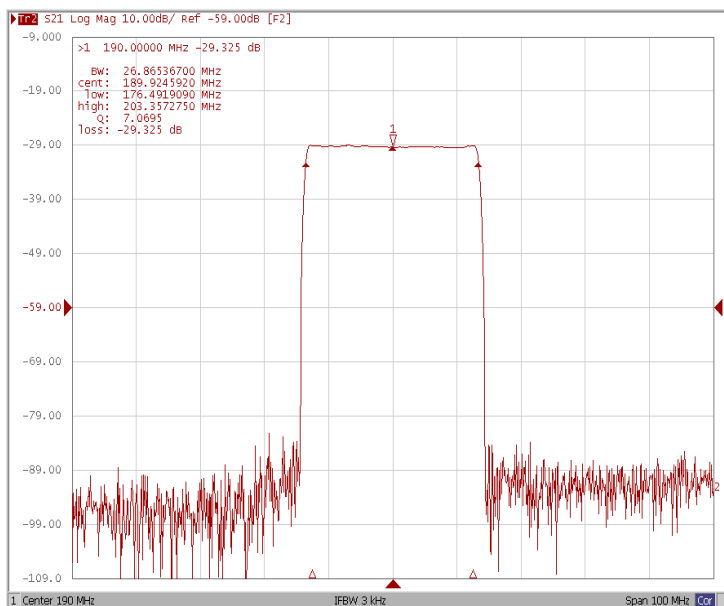

Bandwidth at -40.0 dB

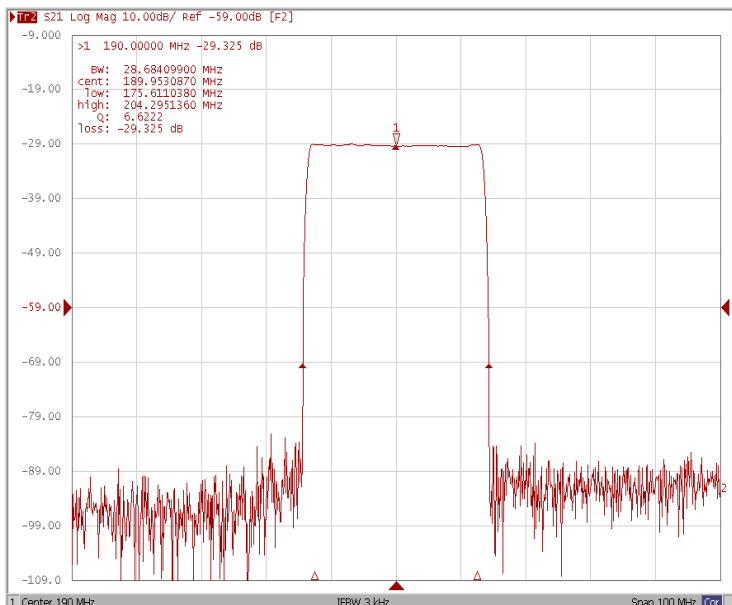


Bandwidth at -50.0 dB

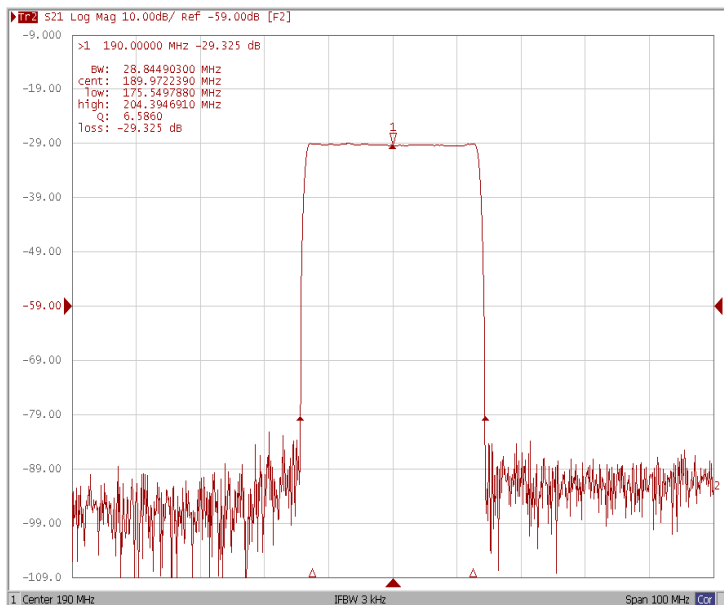


Frequency Characteristics

Frequency Response


Ripple Variation $Fo \pm 12.5\text{MHz}$

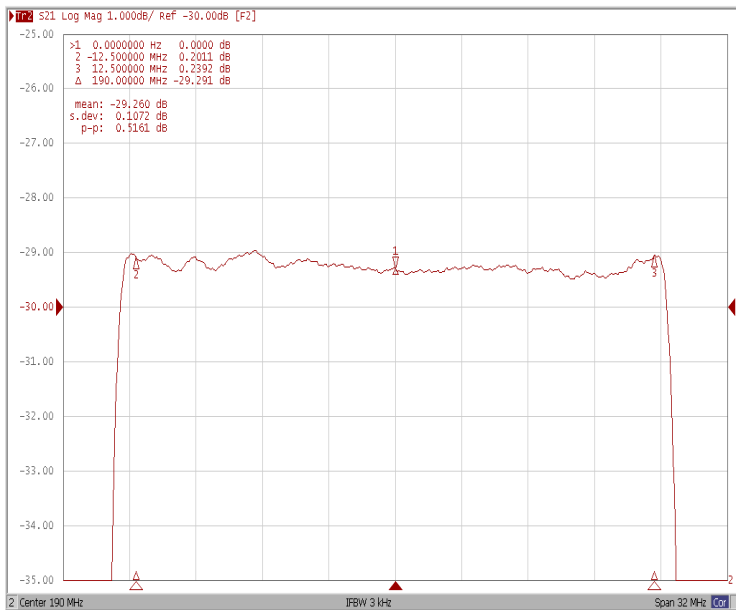

Group Delay Variation $Fo \pm 12.5\text{MHz}$

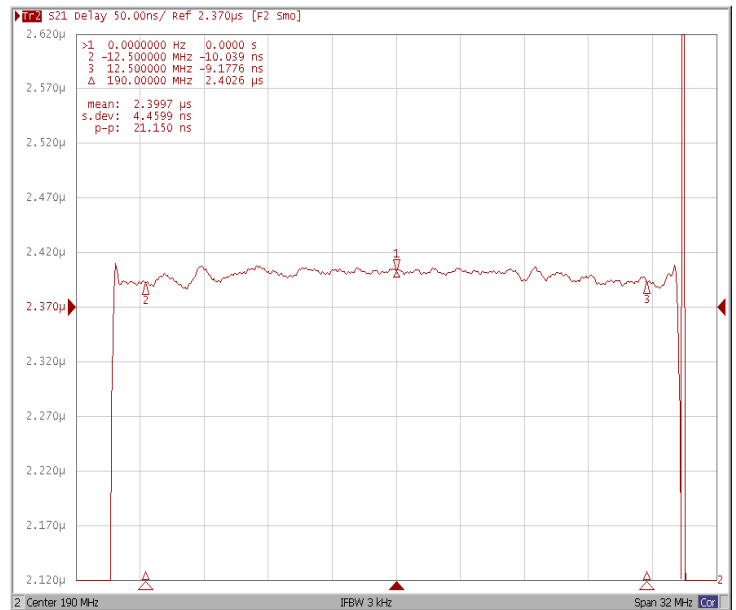

Smith Chart

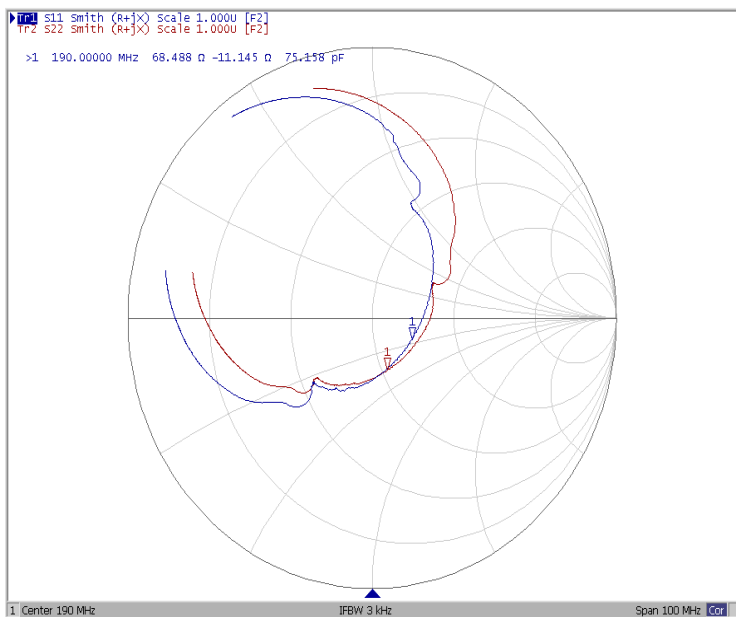

VSWR

