



*Total Solution Provider in Saw Device*

---

# SA2535CM

WIRELESS, RF SAW Filter  
Revision 0: January 2008



- Electrical Characteristics
  - Package Dimensions
  - Testing Environment
  - Frequency Characteristics
- 

**SAWNICS Inc.**

---

460 Cheonheung-ri, Seonggeo-eup, Cheonan-si, Chungcheongnam-do, 330-836 / Korea.  
Tel: +82 41 550 9372 / Fax: +82 41 550 9399 / [www.sawnics.com](http://www.sawnics.com)

## □ Electrical Characteristics

### Maximum Ratings


Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-20		+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	M			
Length x Width	mm <sup>2</sup>	-	3.0 x 3.0	-
Height	mm	-	-	1.3

### Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	2535.0	-
Insertion Loss within 2500.0 ~ 2570.0 MHz	dB	-	3.1	3.8
Amplitude Ripple within 2500.0 ~ 2570.0 MHz	dB <sub>p-p</sub>	-	1.6	2.5
<b>Attenuation:</b>				
200.0 ~ 225.0 MHz	dB	40	45	-
D.C ~ 2400.0 MHz	dB	30	33	-
2070.0 ~ 2150.0 MHz	dB	33	38	-
2185.0 ~ 2260.0 MHz	dB	35	40	-
2390.0 ~ 2470.0 MHz	dB	3	4	-
VSWR within 2500.0 ~ 2570.0 MHz	-	-	2.0	2.5

**Notes :** (1) No Matching Network (Ref. Testing Environment Circuit as shown below).


**Package Dimensions**

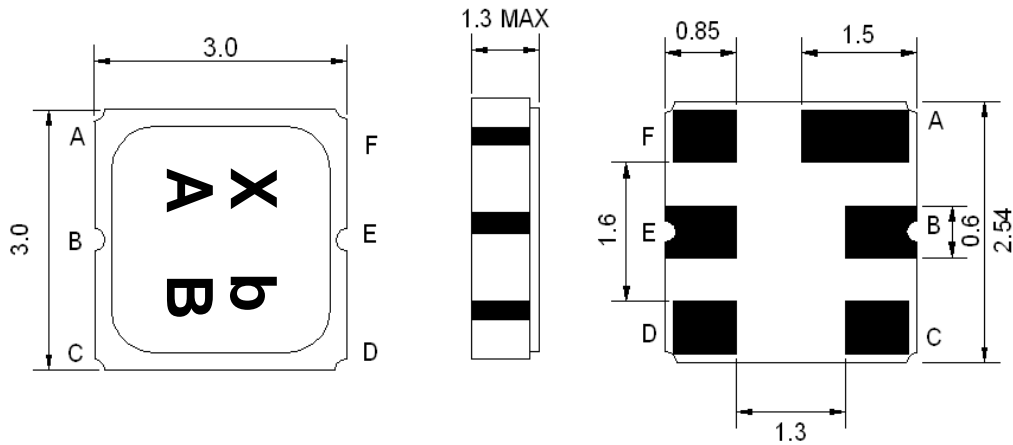

Marking Descriptions	
X	Wireless Application
b	Series Number
A	Date Code(Year)
B	Date Code(Month)

Pin Description	
A, C, D, F	Ground
E	In
B	Out



**Testing Environment**

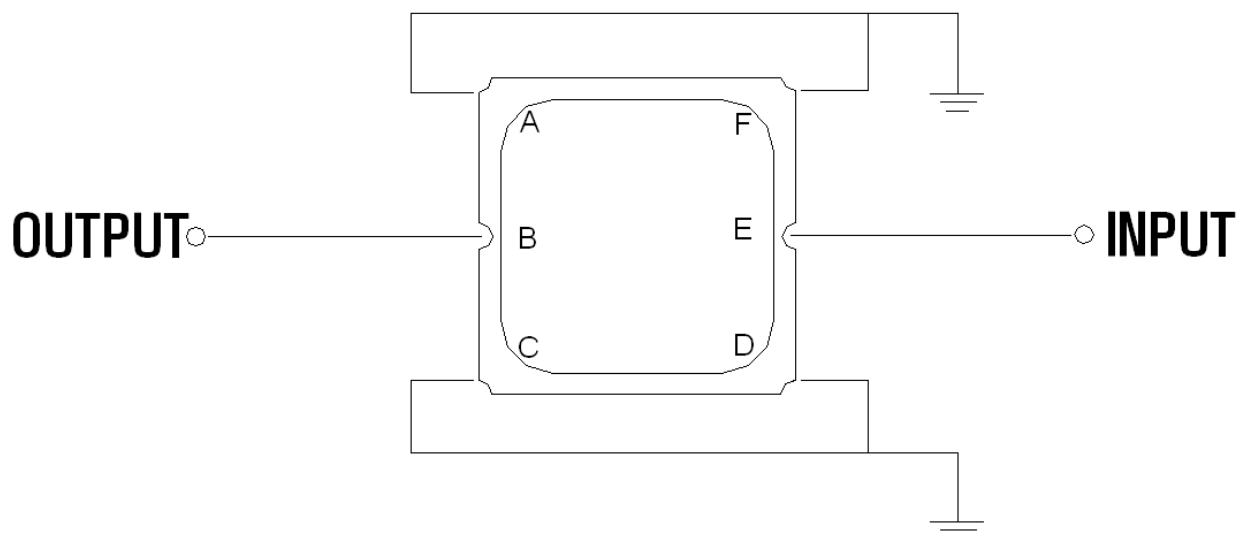



Source & Load Impedance: 50 Ω

**□ Frequency Characteristics**

Frequency Response

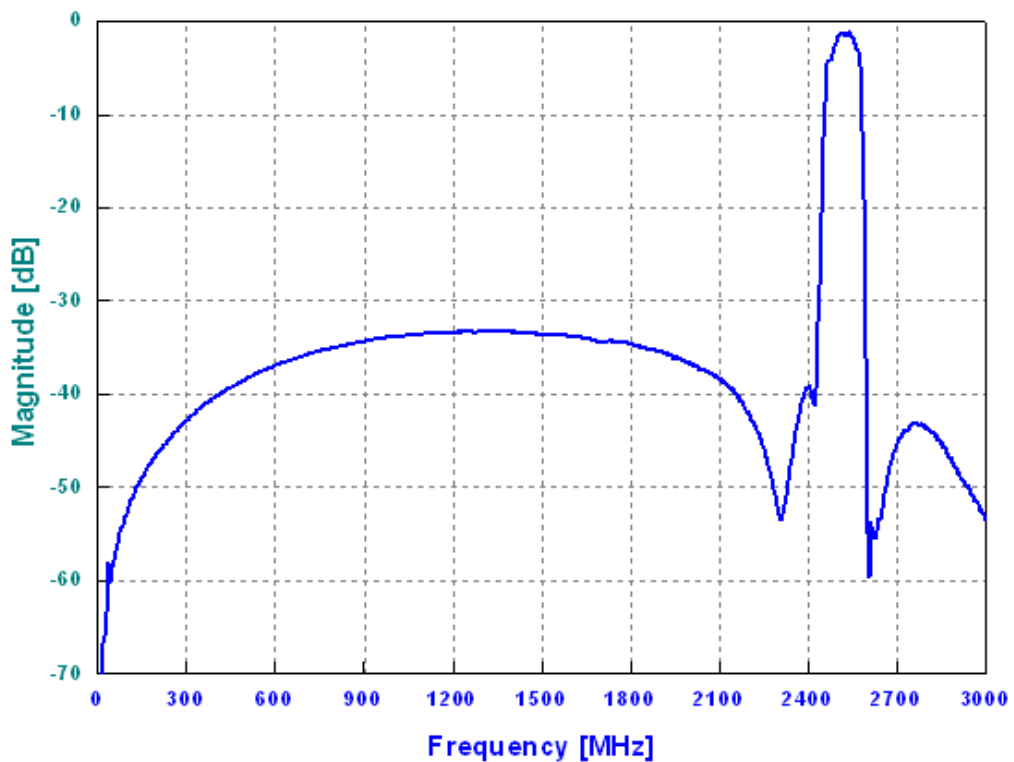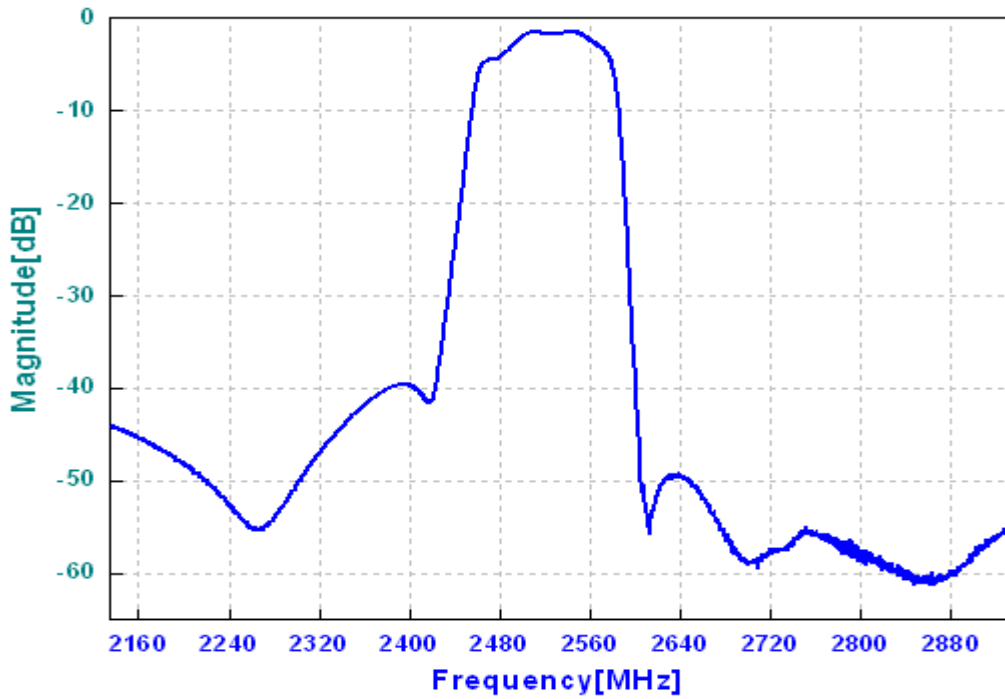

### VSWR

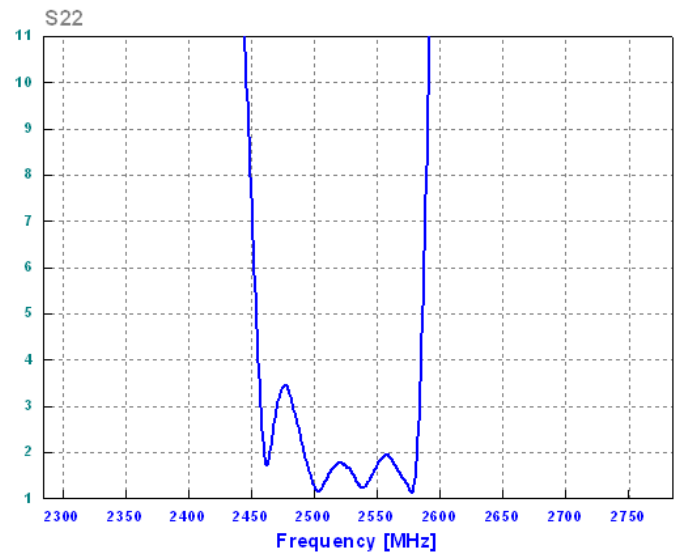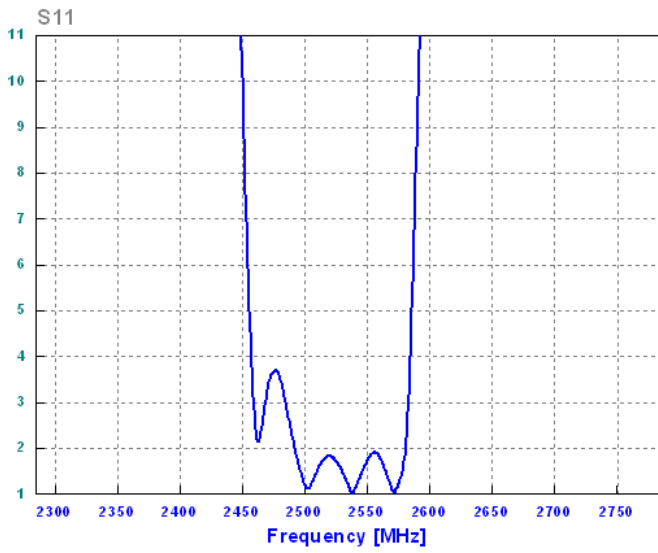

### Smith Chart

