



Total Solution Provider in Saw Device

SA2612AM

Wireless, RF SAW Filter
Revision 0: July 2010



- Electrical Characteristics
 - Package Dimensions
 - Testing Environment
 - Frequency Characteristics
-

SAWNICS Inc.

460 Cheonheung-ri, Seonggeo-eup, Cheonan-si, Chungcheongnam-do, 330-836 / Korea.
Tel: +82 41 550 9372 / Fax: +82 41 550 9399 / www.sawnics.com

□ Electrical Characteristics

Maximum Ratings


Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	0	-	+50
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	M			
Length x Width	mm ²	-	3.0 x 3.0	-
Height	mm	-	-	1.3

Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	2612.0	-
Insertion Loss within 2602.0 ~ 2622.0 MHz	dB	-	2.5	3.5
Amplitude Ripple within 2602.0 ~ 2622.0MHz	dB _{p-p}	-	0.9	1.5
Attenuation:				
2400.0 ~ 2500.0 MHz	dB	35	40	-
2500.0 ~ 2560.0 MHz	dB	15	18	-
2640.0 ~ 2700.0 MHz	dB	1.5	2	-
2700.0 ~ 4500.0 MHz	dB	30	33	-
4500.0 ~ 6000.0 MHz	dB	4	7	-
VSWR within 2602.0 ~ 2622.0 MHz	-	-	1.8	2.3

Notes : (1) No Matching Network (Ref. Testing Environment Circuit as shown below).


□ Package Dimensions

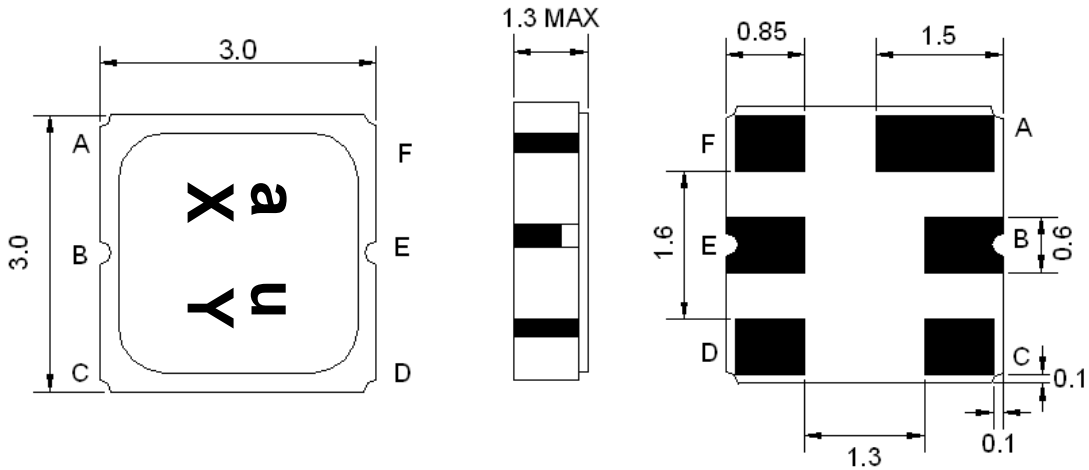

Marking Descriptions	
a	Wireless Application
u	Series Number
X	Date Code(Year)
Y	Date Code(Month)

Pin Description	
A, C, D, F	Ground
E	In or Out
B	Out or In



□ Testing Environment

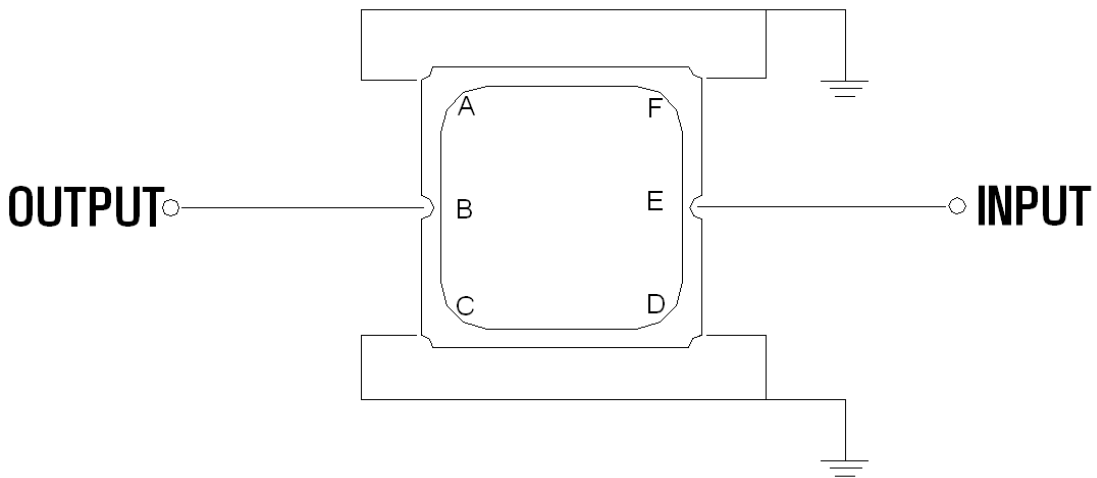



Source & Load Impedance: 50 Ω

□ Frequency Characteristics

Frequency Response

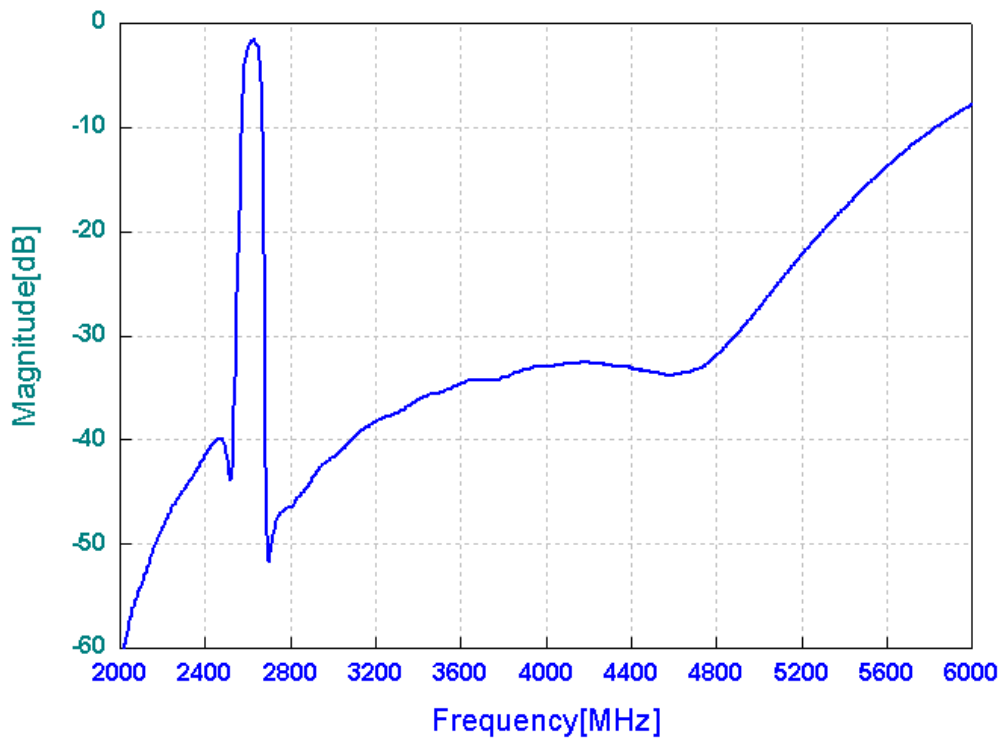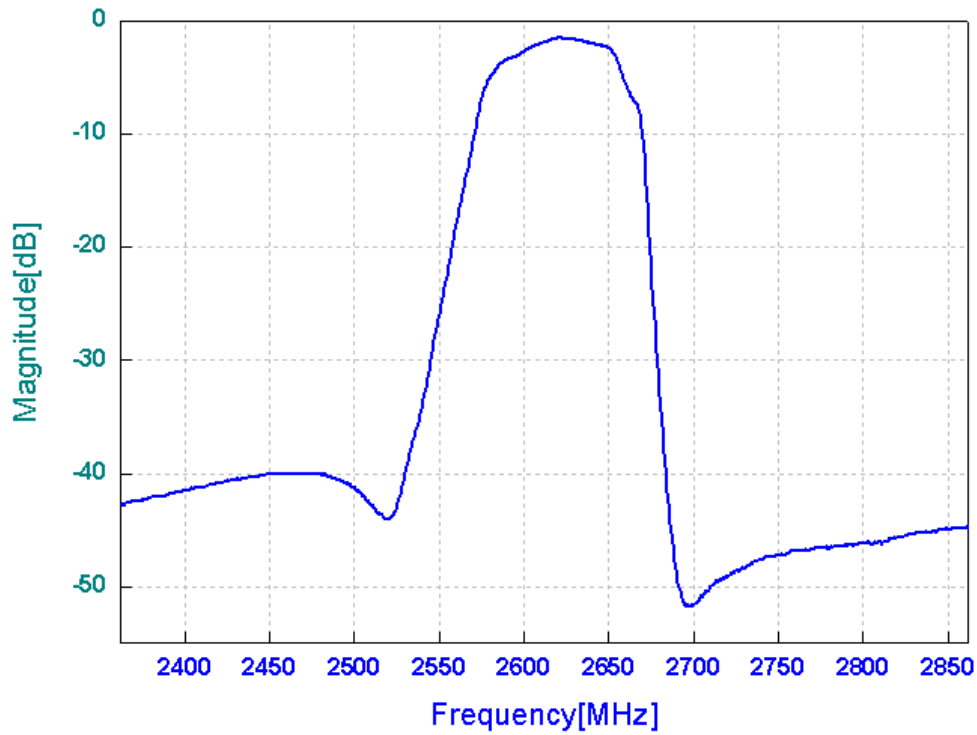

VSWR

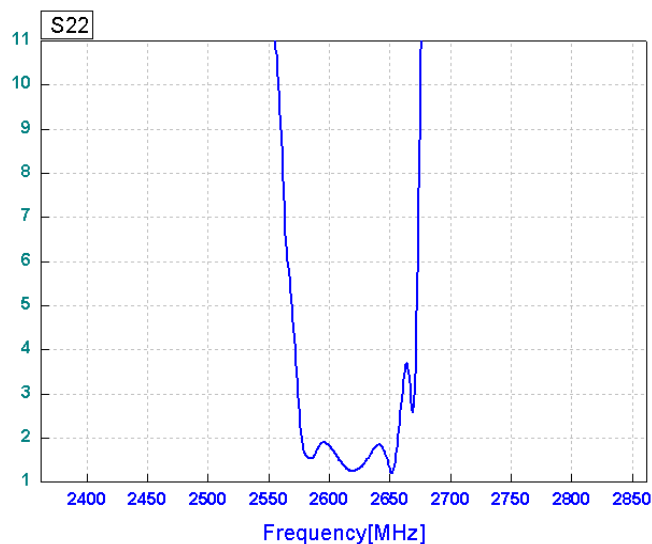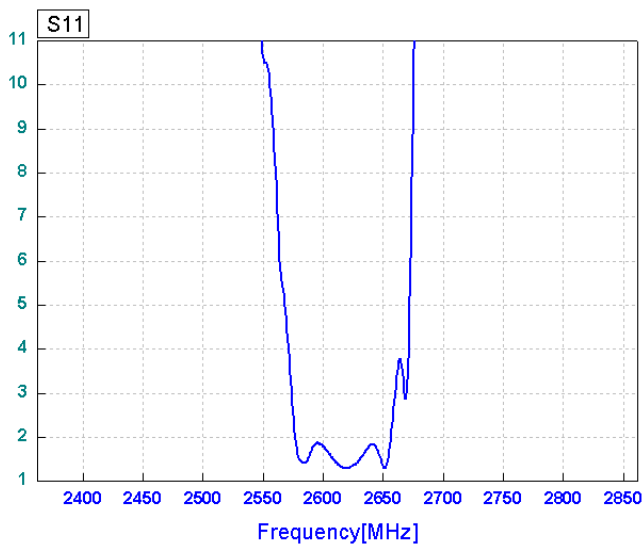

Smith Chart

