



Total Solution Provider in Saw Device

SA26415AV

264.0MHz IF SAW Filter
15.35MHz Bandwidth
Revision 0 : 24.August.2009



- Electrical Characteristics
 - Package Dimensions
 - Testing Environment
 - Frequency Characteristics
-

SAWNICS Inc.

460 Cheonheung-ri, Seonggeo-eup, Cheonan-si, Chungcheongnam-do, 330-836 / Korea.
Tel: +82 41 550 9372 / Fax: +82 41 550 9399 / www.sawnics.com

□ Electrical Characteristics

Maximum Ratings


Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-	25	-
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	V			
Length x Width	mm ²	-	13.3 x 6.5	-
Height	mm	-	-	1.8

Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	264.0	-
Insertion Loss at Fo	dB	-	25.5	28.0
Group Delay Variation	ns	-	38	80
Absolute Delay at Fo	us	-	2.02	-
Amplitude Ripple	dB	-	0.60	1.00
Bandwidth at -1dB	MHz	15.00	15.35	-
Bandwidth at -3dB	MHz	-	15.78	-
Bandwidth at -25dB	MHz	-	17.25	17.50
Bandwidth at -40dB	MHz	-	17.66	17.90
Relative Attenuation				
Lower Sidelobe	dB	48	52	-
Upper Sidelobe	dB	48	52	-
Temperature Coefficient	ppm/°C	-	-20	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

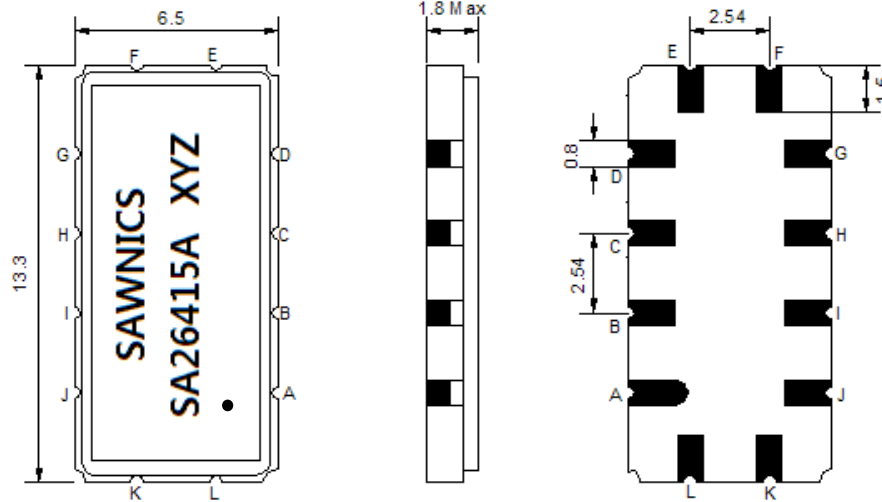

- ① SAWNICS: Brand
- ② SA26415A: Model Name
- ③ X : Date Code (Year)
- ④ Y : Date Code (Month)
- ⑤ Z : Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

Testing Environment

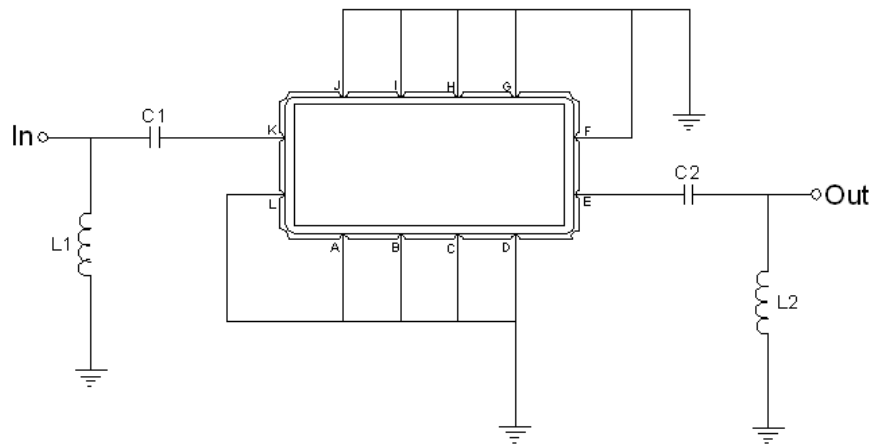


Test Fixture & Values	
Input	L1 = 8.2 nH , C1 = 75 pF
Output	L2 = 18 nH , C2 = 33 pF
Source/Load Impedance	50 Ω




Frequency Characteristics

Frequency Response


Bandwidth at -1.0 dB

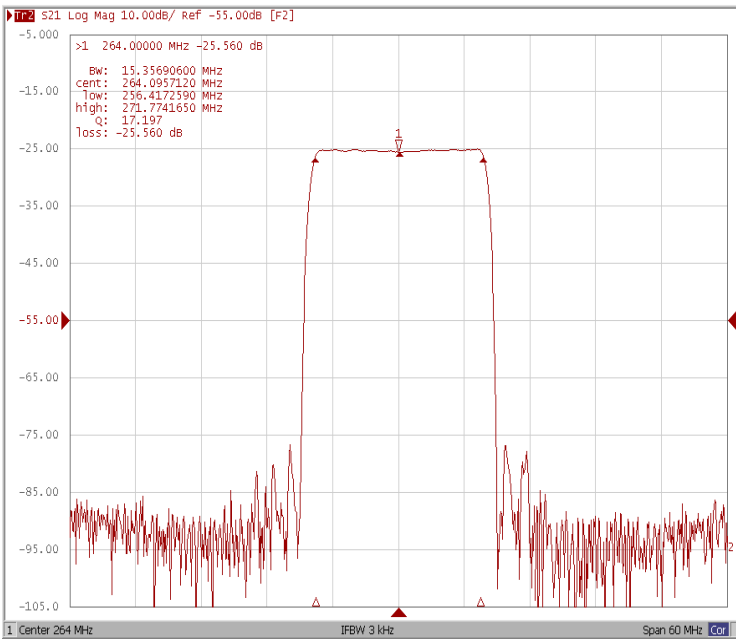


Bandwidth at -3.0 dB

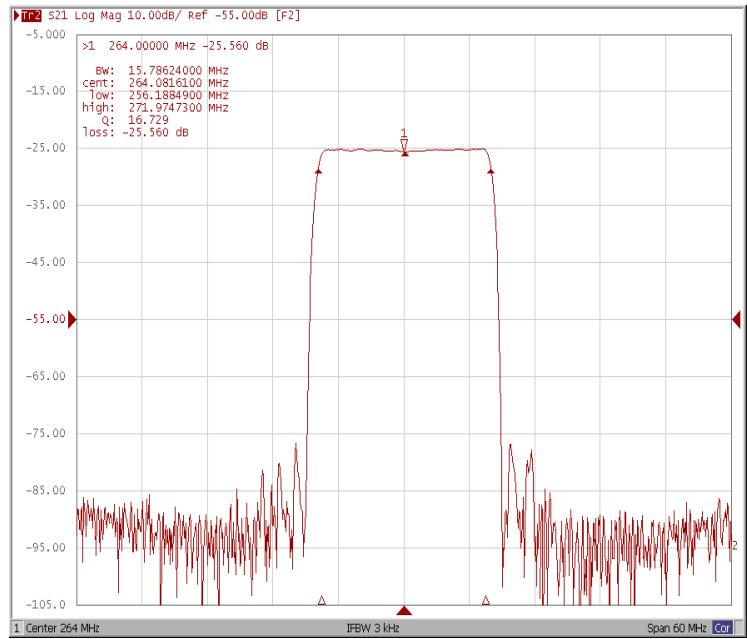

Bandwidth at -25.0 dB

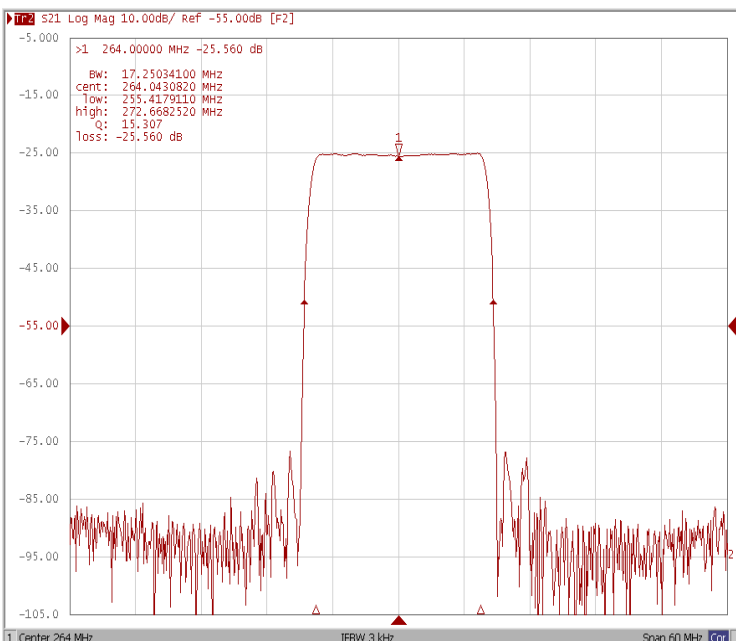

Bandwidth at -40.0 dB

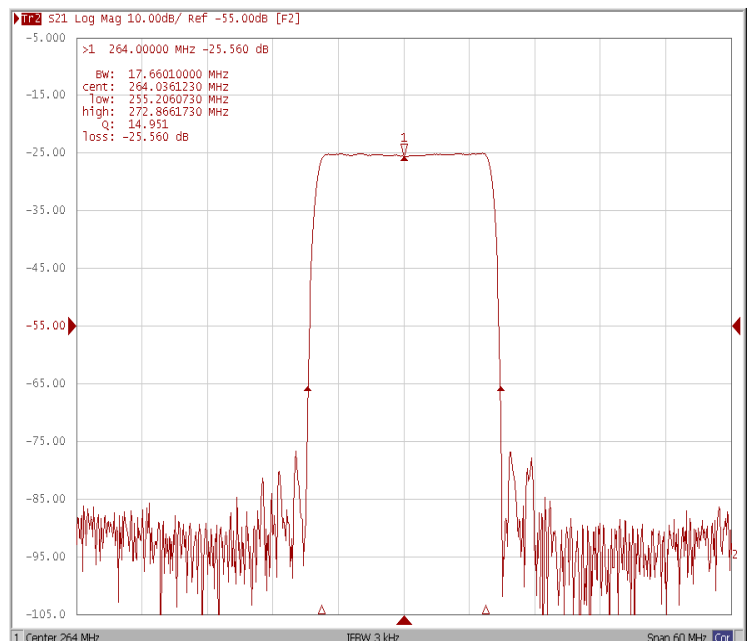





Frequency Characteristics

Frequency Response


Ripple Variation

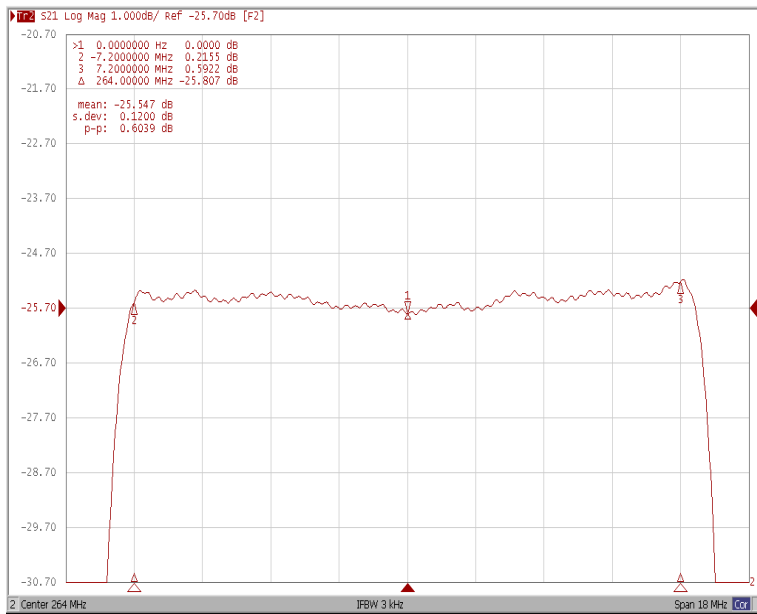

Group Delay Variation

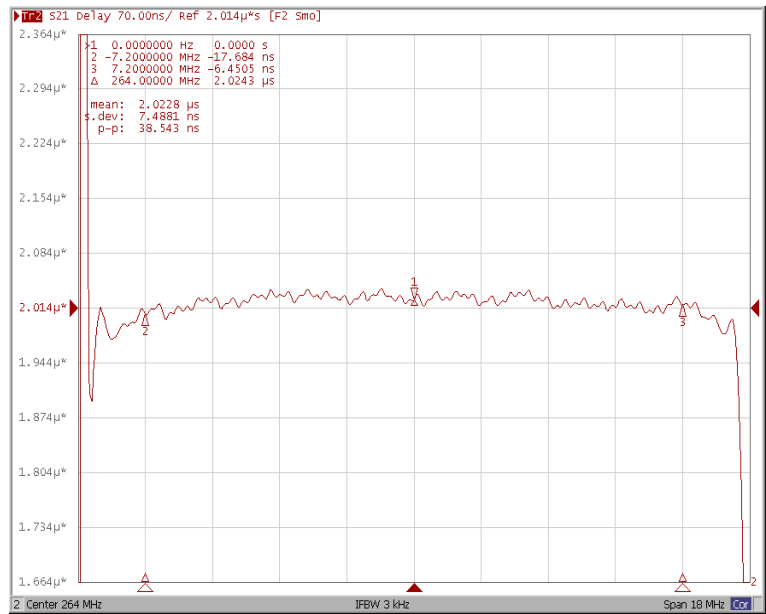

Smith Chart

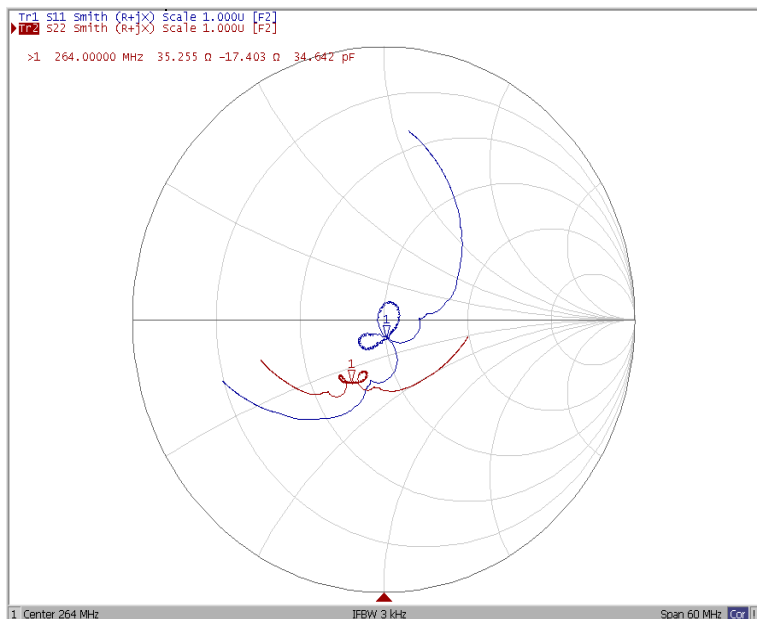

VSWR

