



Total Solution Provider in Saw Device

SA392BP

Wireless, RF SAW Filter
Revision 0: January 2009



- Electrical Characteristics
 - Package Dimensions
 - Testing Environment
 - Frequency Characteristics
-

SAWNICS Inc.

460 Cheonheung-ri, Seonggeo-eup, Cheonan-si, Chungcheongnam-do, 330-836 / Korea.
Tel: +82 41 550 9372 / Fax: +82 41 550 9399 / www.sawnics.com

□ Electrical Characteristics

Maximum Ratings


Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-30	-	+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	-
Average Input Power	dBm	-	28	-
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	P			
Length x Width	mm ²	-	3.8 x 3.8	-
Height	mm	-	-	1.4

Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	392.5	-
Insertion Loss within 390.0 ~ 395.0 MHz	dB	-	2.0	3.5
Amplitude Ripple within 390.0 ~ 395.0 MHz	dB _{p-p}	-	0.6	1.0
Attenuation:				
0.3MHz ~ 380.0MHz	dB	40	45	-
380.0MHz ~ 385.0MHz	dB	40	45	-
410.0MHz ~ 1200.0MHz	dB	30	35	-
1200.0MHz ~ 2000.0MHz	dB	28	33	-
VSWR within 390.0 ~ 395.0 MHz	-	-	1.4	2.0

Notes : (1) No Matching Network (Ref. Testing Environment Circuit as shown below).


Package Dimensions

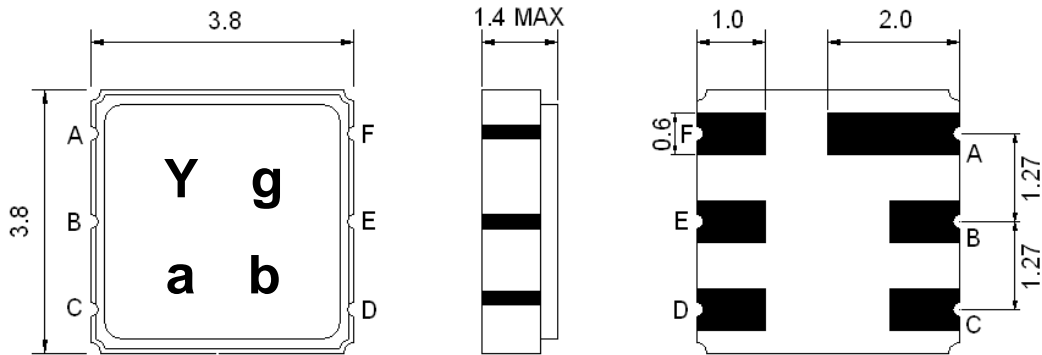

Marking Descriptions	
Y	Wireless Application
g	Series Number
a	Date Code(Year)
b	Date Code(Month)

Pin Description	
A, C, D, F	Ground
B	In or Out
E	Out or In



Testing Environment

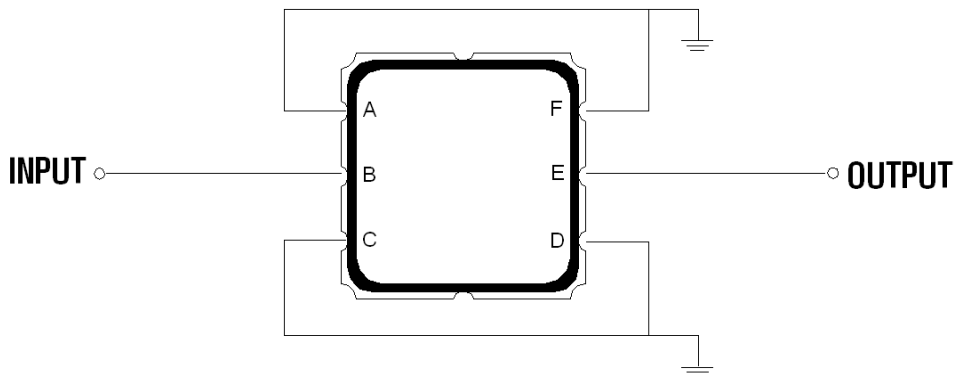



Source & Load Impedance: 50 Ω

□ Frequency Characteristics

Frequency Response

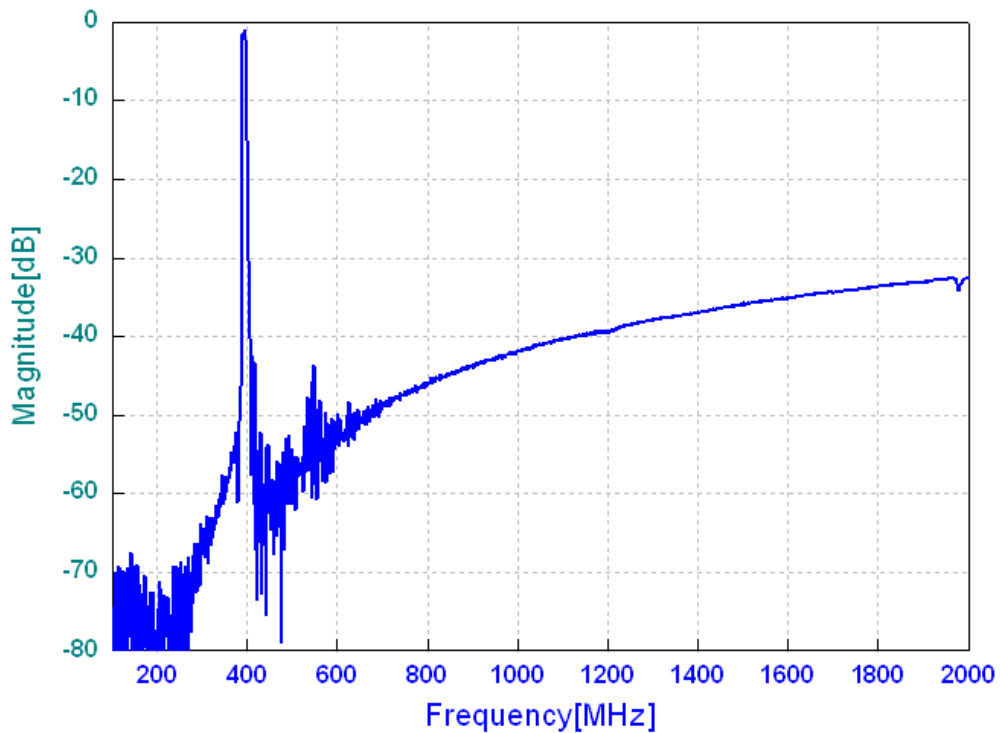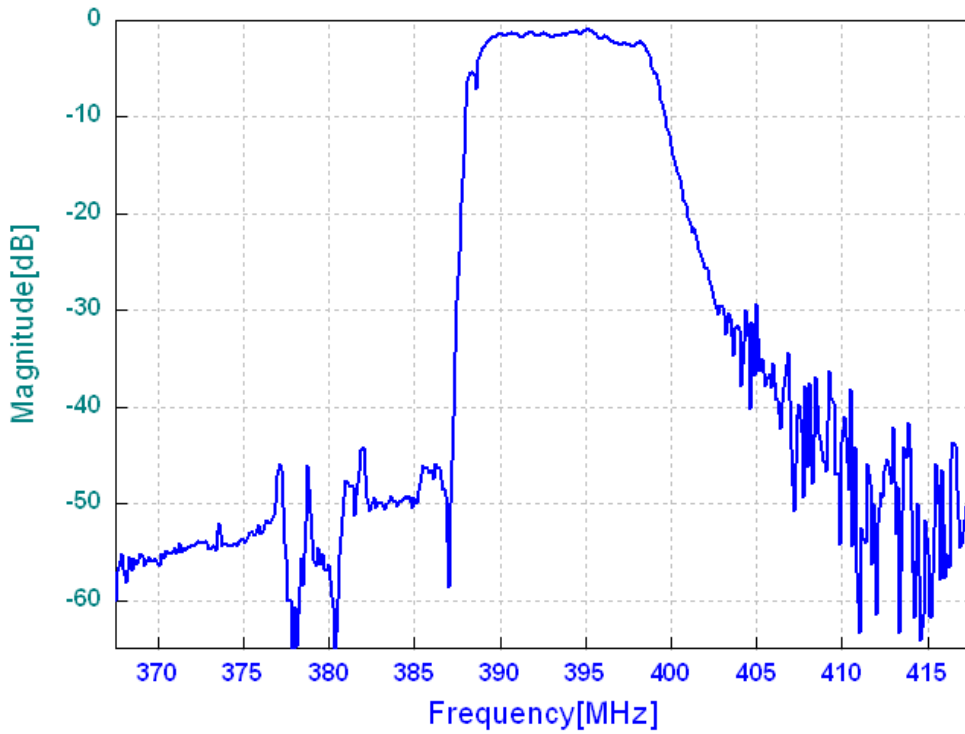

VSWR

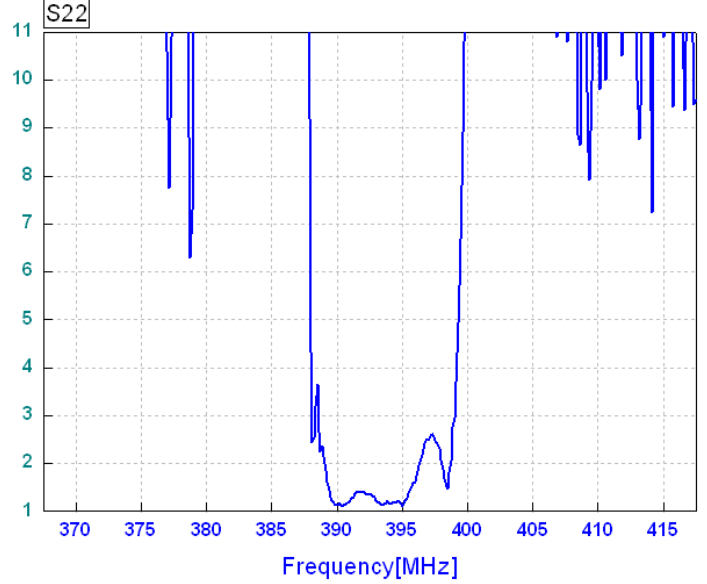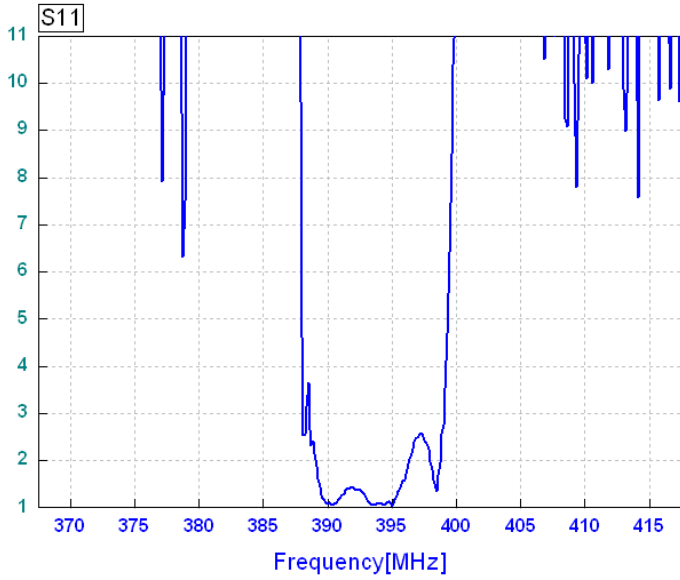

Smith Chart

