



*Total Solution Provider in Saw Device*

---

# SA412CM1

CDMA 450 L-Band, RF-Tx SAW Filter  
Revision 0: December 2006



- Electrical Characteristics
  - Package Dimensions
  - Testing Environment
  - Frequency Characteristics
- 

**SAWNICS Inc.**

---

460 Cheonheung-ri, Seonggeo-eup, Cheonan-si, Chungcheongnam-do, 330-836 / Korea.  
Tel: +82 41 550 9372 / Fax: +82 41 550 9399 / [www.sawnics.com](http://www.sawnics.com)

**□ Electrical Characteristics**

**Maximum Ratings**


Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-30	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	27
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	M1			
Length x Width	mm <sup>2</sup>	-	3.0 x 3.0	-
Height	mm	-	-	1.3

**Electrical Specification**

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	412.5	-
Insertion Loss in 410.0 ~415.0 MHz	dB	-	1.6	2.8
<b>Stop Band Attenuation:</b>				
0.3 ~ 400.0 MHz	dB	23	26	-
420.0 ~ 425.0 MHz	dB	30	40	-
425.0 ~ 1700.0 MHz	dB	20	25	-
1700.0 ~ 2000.0 MHz	dB	20	32	-
VSWR in 410.0 ~ 415.0 MHz	-	-	1.8	2.3

**Notes :** (1) No Matching Network .


**Package Dimensions**

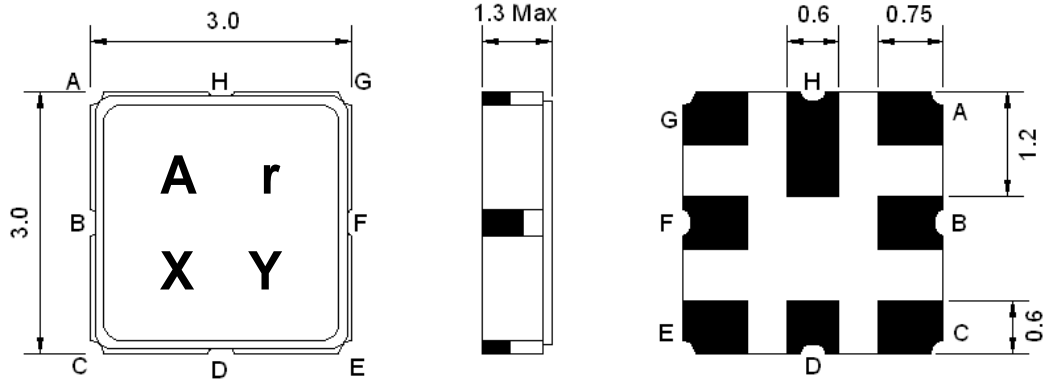

Marking Descriptions	
A	CDMA450 Application
r	Series Number
X	Date Code(Year)
Y	Date Code(Month)

Pin Description	
A, C, D, E, G, H	Ground
B	In
F	Out



**Testing Environment**

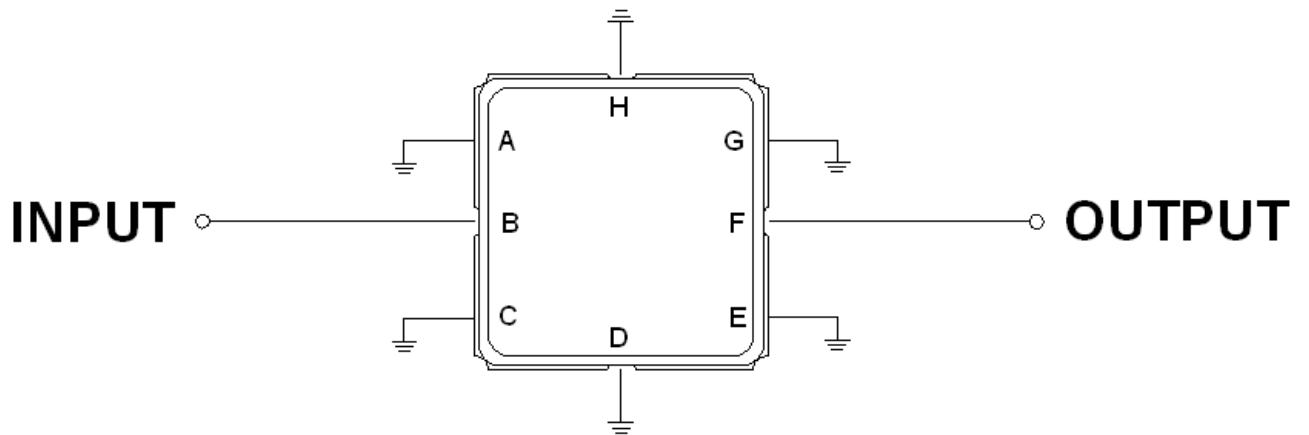



Source & Load Impedance: 50 Ω

**Frequency Characteristics**

Frequency Response

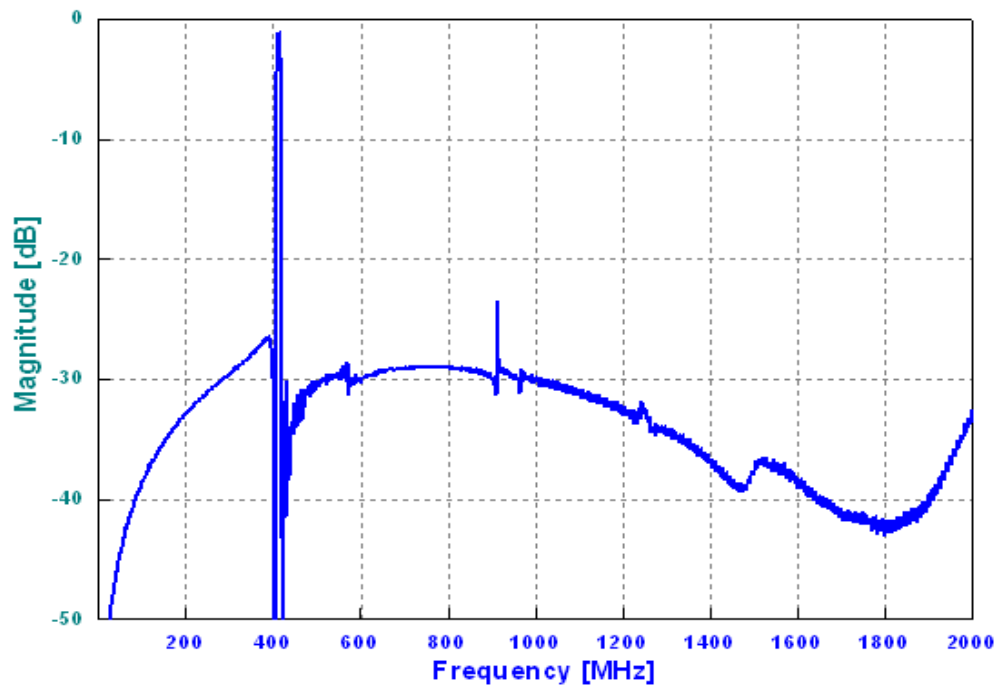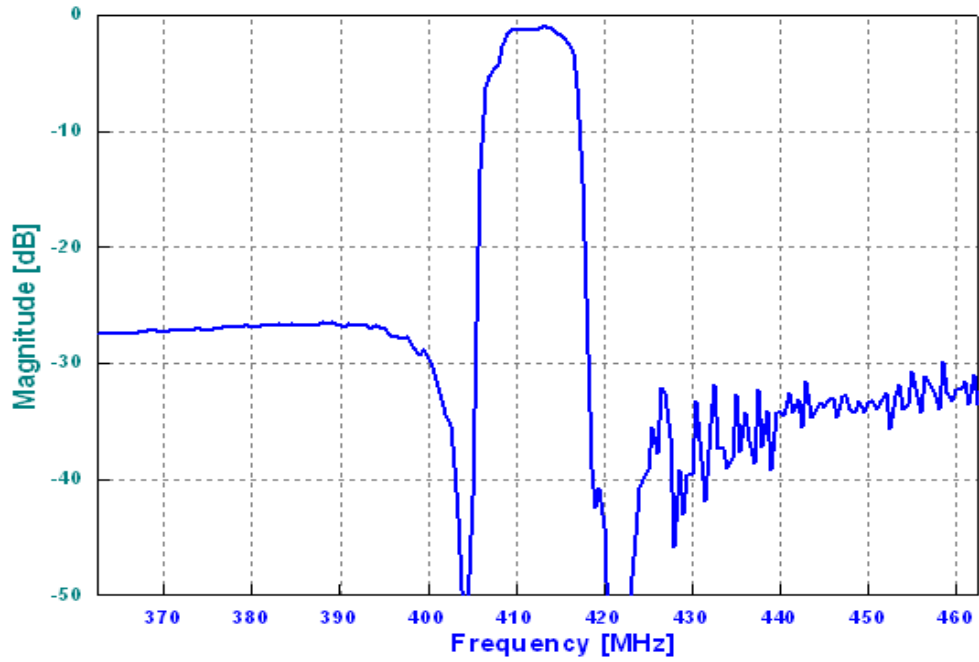

### VSWR

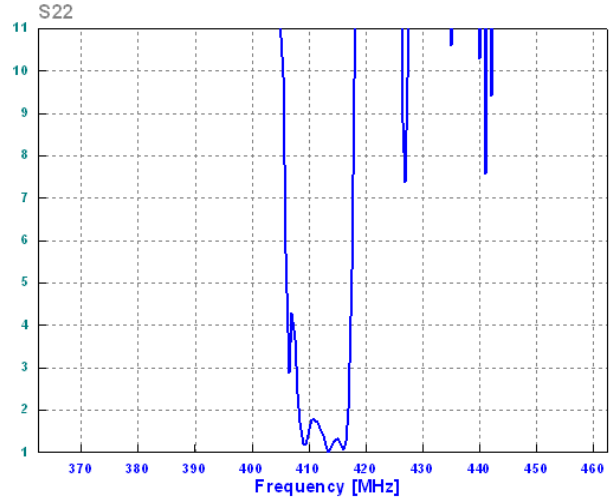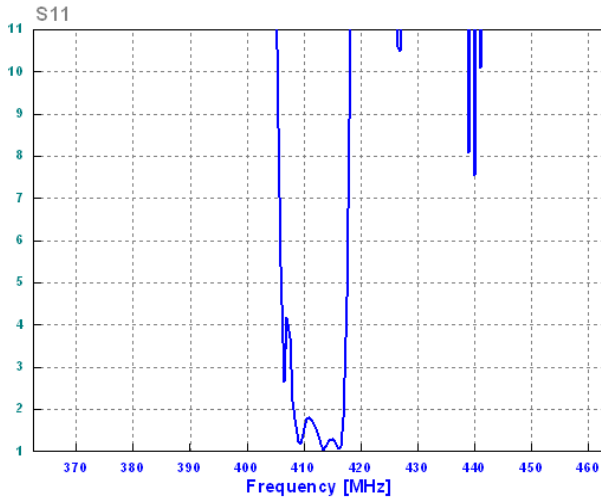

### Smith Chart

