



*Total Solution Provider in Saw Device*

---

# SA746AP

Wireless, RF SAW Filter  
Revision 0: January 2006



- Electrical Characteristics
  - Package Dimensions
  - Testing Environment
  - Frequency Characteristics
- 

**SAWNICS Inc.**

---

460 Cheonheung-ri, Seonggeo-eup, Cheonan-si, Chungcheongnam-do, 330-836 / Korea.  
Tel: +82 41 550 9372 / Fax: +82 41 550 9399 / [www.sawnics.com](http://www.sawnics.com)

## □ Electrical Characteristics

### Maximum Ratings


Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-10	-	+60
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	0
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	P			
Length x Width	mm <sup>2</sup>	-	3.8 x 3.8	-
Height	mm	-	-	1.4

### Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	746.0	-
Insertion Loss in 740.0 ~ 752.0 MHz	dB	-	2.0	3.0
Amplitude Ripple in 740.0 ~ 752.0 MHz	dB	-	0.5	1.5
Group Delay Variation in 740.0 ~ 752.0 MHz	nsec	-	15	-
Absolute Group Delay at Fo	nsec	-	45	-
<b>Attenuation:</b>				
~ Fo - 40.0 MHz	dB	45	55	-
Fo + 60.0 MHz ~	dB	45	55	-
VSWR in 740.0 ~ 752.0 MHz	-	-	1.5	2.5

**Notes :** (1) No Matching Network


**Package Dimensions**

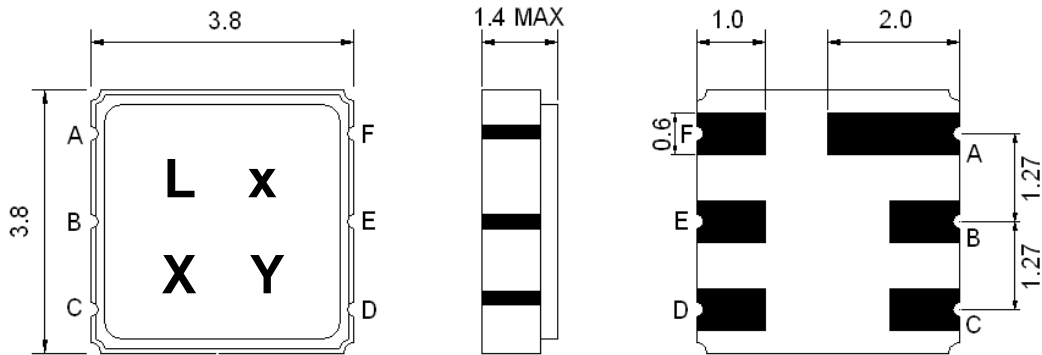

Marking Descriptions	
L	Wireless Application
x	Series Number
X	Date Code(Year)
Y	Date Code(Month)

Pin Description	
A, C, D, F	Ground
B	In
E	Out



**Testing Environment**

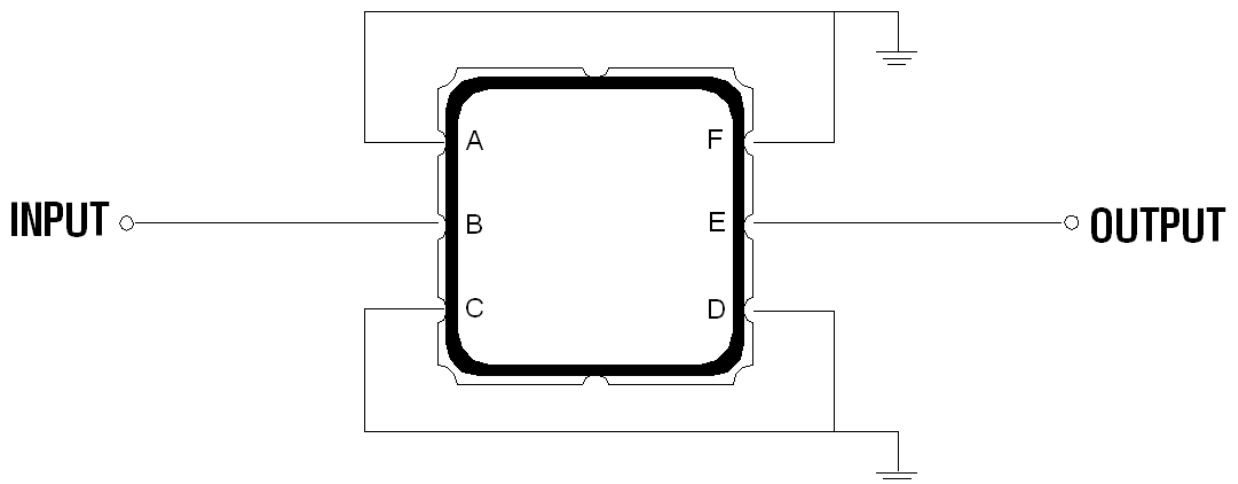



Source & Load Impedance: 50 Ω

**□ Frequency Characteristics**

Frequency Response

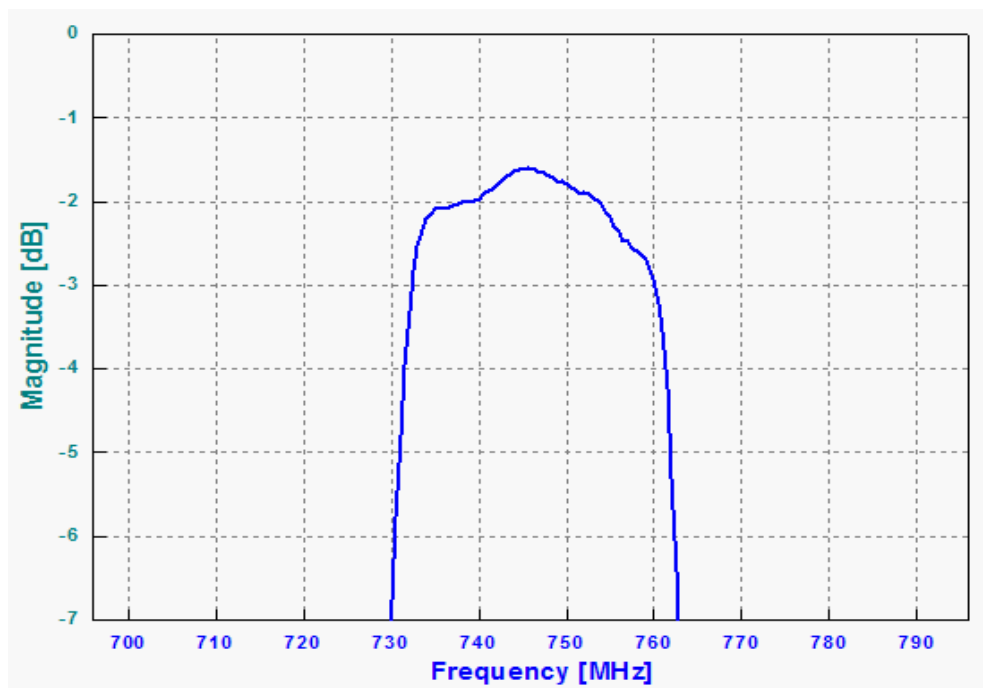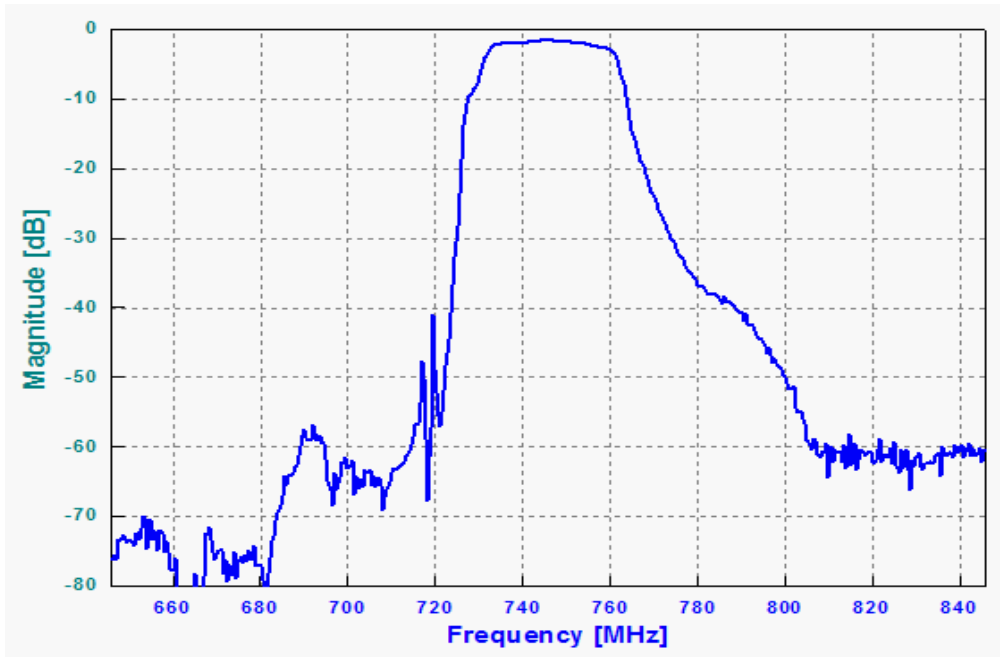

### VSWR

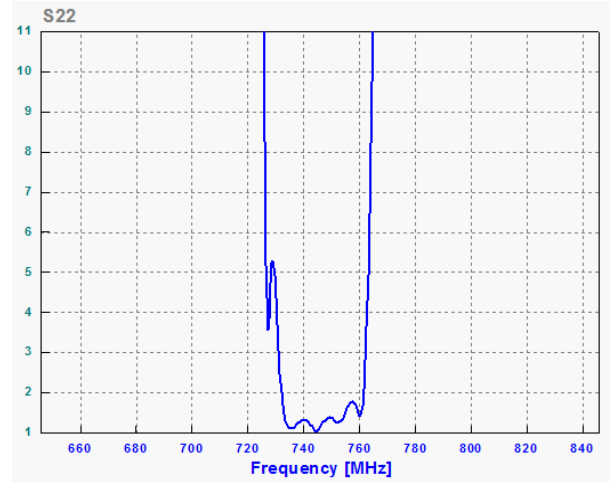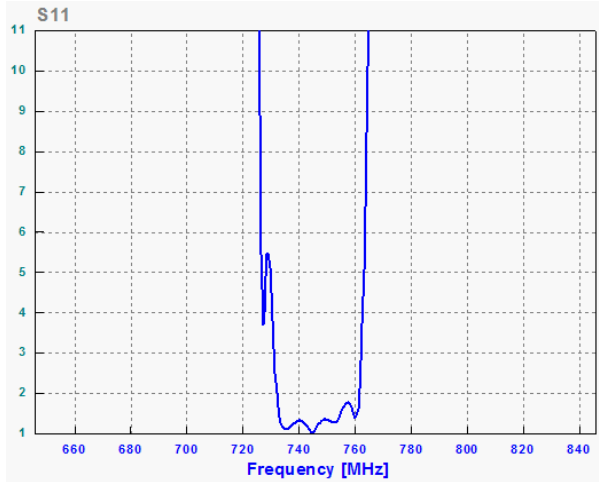

### Smith Chart

