



Total Solution Provider in Saw Device

SA866AM

Wireless, RF SAW Filter
Revision 0: March 2007



- Electrical Characteristics
 - Package Dimensions
 - Testing Environment
 - Frequency Characteristics
-

SAWNICS Inc.

460 Cheonheung-ri, Seonggeo-eup, Cheonan-si, Chungcheongnam-do, 330-836 / Korea.
Tel: +82 41 550 9372 / Fax: +82 41 550 9399 / www.sawnics.com

□ Electrical Characteristics

Maximum Ratings


Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-40	-	+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	5
Maximum Input Power	dBm	-	-	15
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	M			
Length x Width	mm ²	-	3.0 x 3.0	-
Height	mm	-	-	1.3

Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	866.5	-
Insertion Loss within 863.0 ~ 870.0 MHz	dB	-	2.2	3.0
Amplitude Ripple within 863.0 ~ 870.0 MHz	dB _{p-p}	-	0.4	1.5
Attenuation:				
825.0 ~ 828.0 MHz	dB	40	55	-
846.0 ~ 849.0 MHz	dB	35	45	-
889.0 ~ 892.0 MHz	dB	30	36	-
910.0 ~ 913.0 MHz	dB	40	55	-

Notes : (1) No Matching Network (Ref. Testing Environment Circuit as shown below).


Package Dimensions

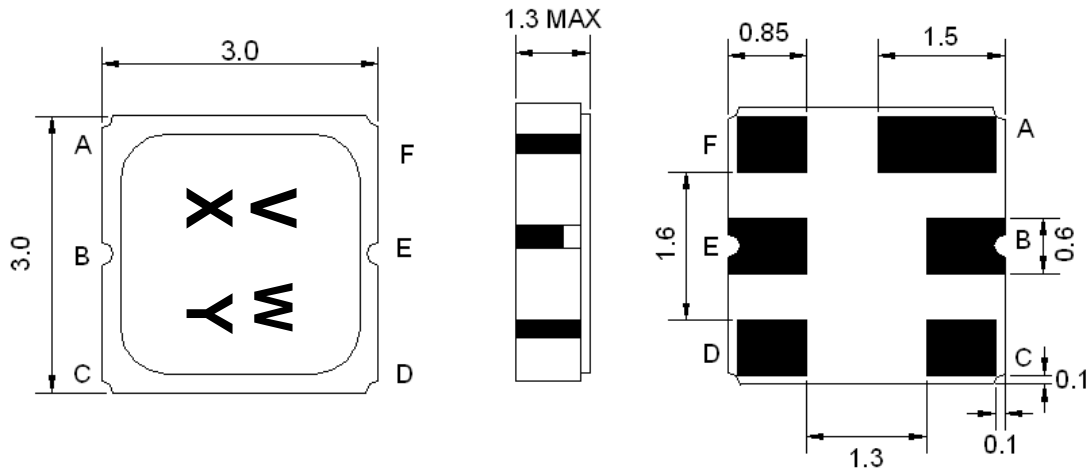

Marking Descriptions	
V	Wireless Application
W	Series Number
X	Date Code(Year)
Y	Date Code(Month)

Pin Description	
A, C, D, F	Ground
E	In
B	Out

Testing Environment

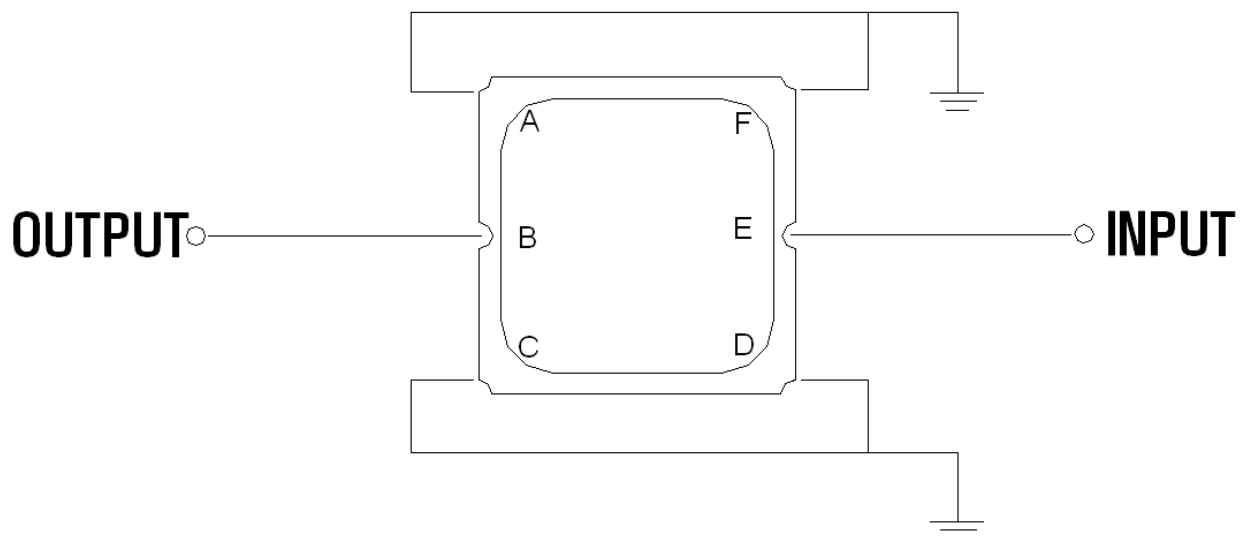

Source & Load Impedance: 50 Ω

□ Frequency Characteristics

Frequency Response

