



Total Solution Provider in Saw Device

SA914AP

Wireless, RF SAW Filter
Revision 0: November 2004



- Electrical Characteristics
 - Package Dimensions
 - Testing Environment
 - Frequency Characteristics
-

SAWNICS Inc.

460 Cheonheung-ri, Seonggeo-eup, Cheonan-si, Chungcheongnam-do, 330-836 / Korea.
Tel: +82 41 550 9372 / Fax: +82 41 550 9399 / www.sawnics.com

□ Electrical Characteristics

Maximum Ratings


Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-30	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	5
Maximum Input Power	dBm	-	-	15
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	P			
Length x Width	mm ²	-	3.8 x 3.8	-
Height	mm	-	-	1.4

Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	914.0	-
Insertion Loss within 910 ~ 918 MHz	dB	-	3.3	4.0
Amplitude Ripple within 910 ~ 918 MHz	dB _{p-p}	-	0.7	2.0
Attenuation:				
869 ~ 873 MHz	dB	40	48	-
891 ~ 894 MHz	dB	30	45	-
934 ~ 937 MHz	dB	18	28	-
955 ~ 960 MHz	dB	40	48	-
VSWR within 910 ~ 918 MHz	-	-	2.0	2.5

Notes : (1) No Matching Network (Ref. Testing Environment Circuit as shown below).


Package Dimensions

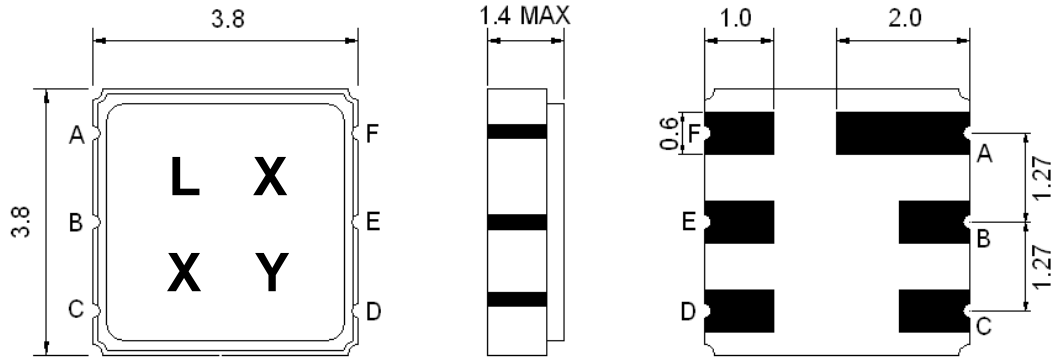

Marking Descriptions	
L	Wireless Application
X	Series Number
X	Date Code(Year)
Y	Date Code(Month)

Pin Description	
A, C, D, F	Ground
B	In
E	Out



Testing Environment

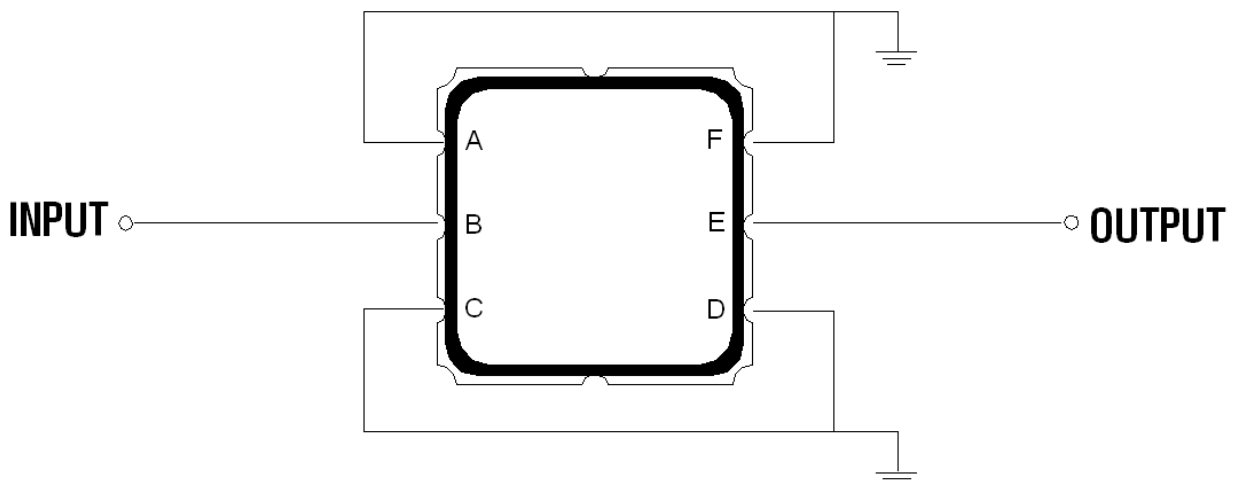



Source & Load Impedance: 50 Ω

□ Frequency Characteristics

Frequency Response

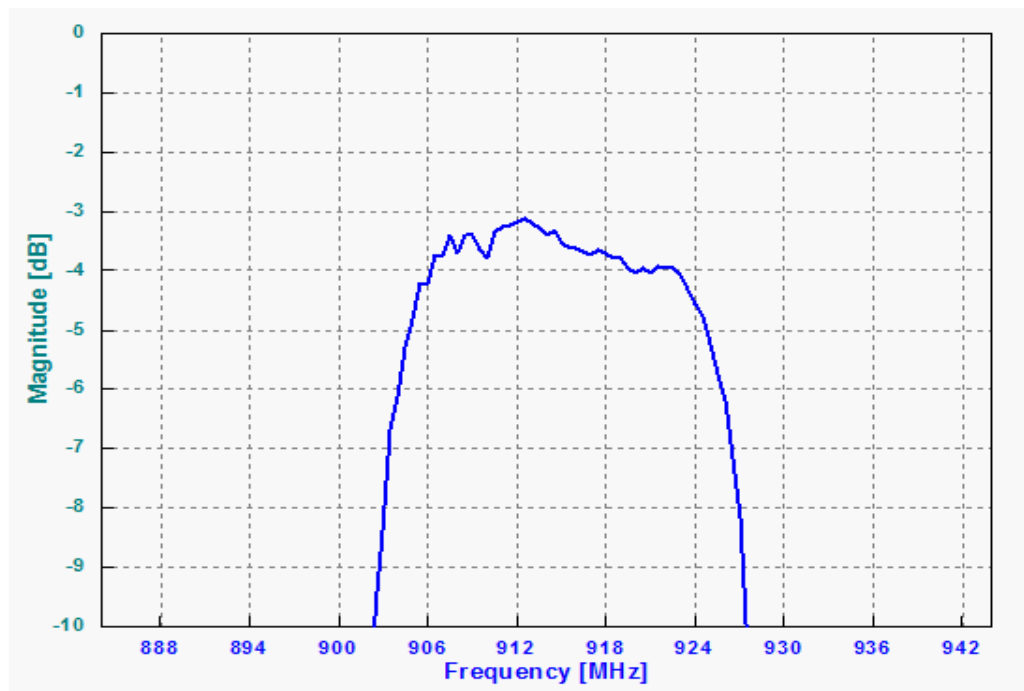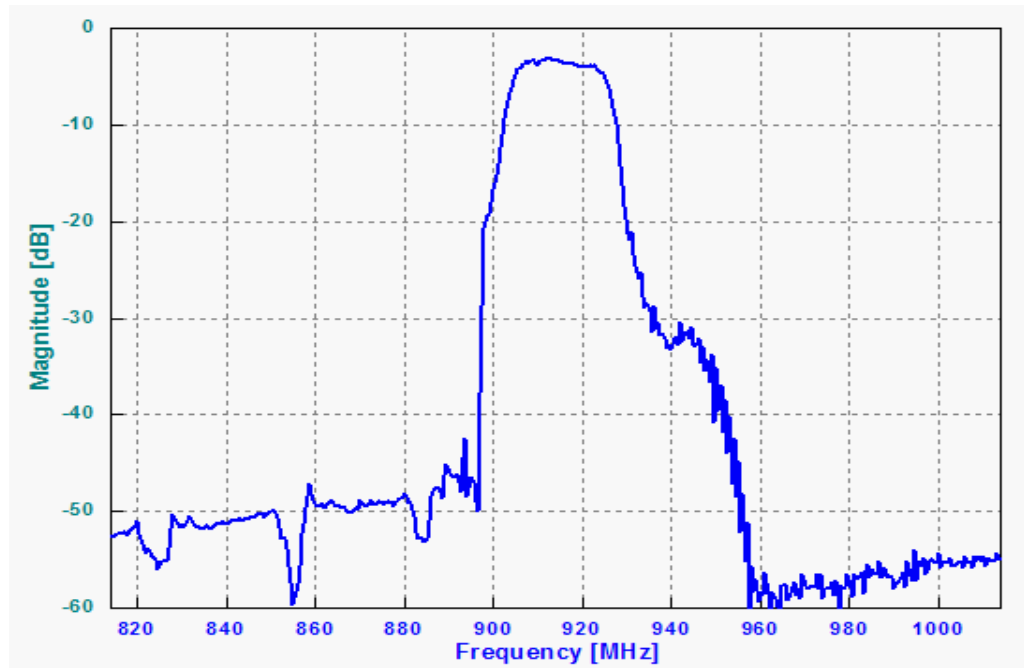

VSWR

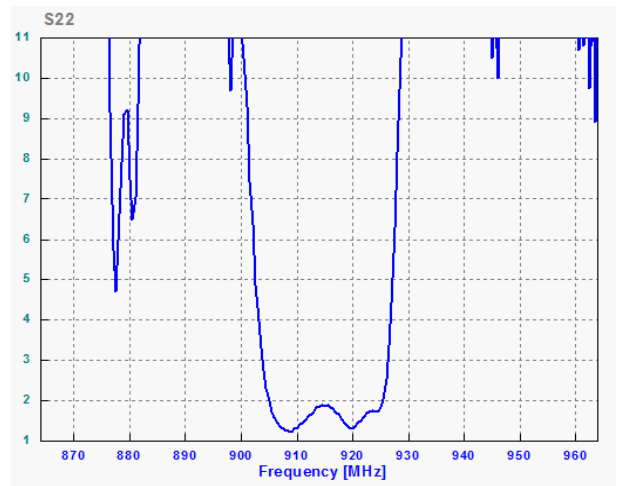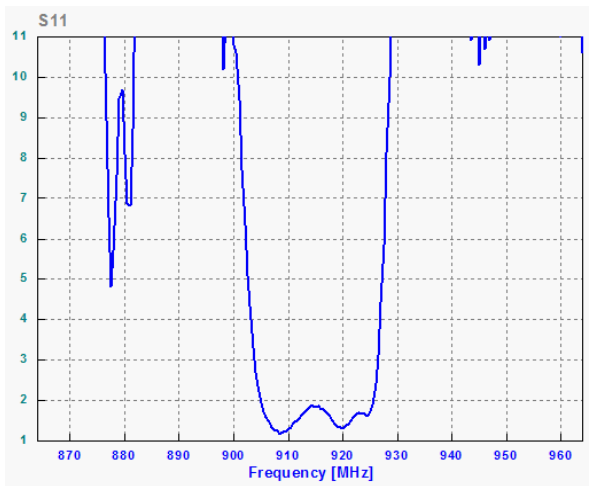

Smith Chart

