



*Total Solution Provider in Saw Device*

---

# SL13507AV

135MHz IF SAW Filter

7.6 MHz Bandwidth

Revision 1: 29. Oct. 2007



- 
- Electrical Characteristics
  - Package Dimensions
  - Testing Environment
  - Frequency Characteristics
- 

**SAWNICS Inc.**

---

460 Cheonheung-ri, Seonggeo-eup, Cheonan-si, Chungcheongnam-do, 330-836 / Korea.  
Tel: +82 41 550 9372 / Fax: +82 41 550 9399 / [www.sawnics.com](http://www.sawnics.com)

## □ Electrical Characteristics

### Maximum Ratings


Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-20	-	70
Storage Temperature Range	°C	-40	-	80
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	V			
Length x Width	mm <sup>2</sup>	-	13.3 x 6.5	-
Height	mm	-	-	1.8

### Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	135.0	-
Insertion Loss at Fo	dB	-	17.0	20.0
Amplitude Ripple Variation	dB <sub>p-p</sub>	-	0.4	0.8
Group Delay Variation at Fo ± 3.5 MHz	nsec	-	40	80
Absolute Delay at Fo	µsec	-	0.85	-
Temperature Coefficient	ppm/°C	-	-23	-
Bandwidth at -1.0 dB	MHz	7.3	7.6	-
Bandwidth at -3.0 dB	MHz	8.3	8.5	-
Bandwidth at -40.0 dB	MHz	-	12.0	12.5
<b>Relative Attenuation</b>				
Lower Sidelobe	dB	43	48	-
Upper Sidelobe	dB	43	48	-


**Notes :** (1) With Matching Network (Ref. Testing Environment Circuit as shown below).  
Those impedances could be modified with different impedance values and/or structures, if necessary.

**Package Dimensions**

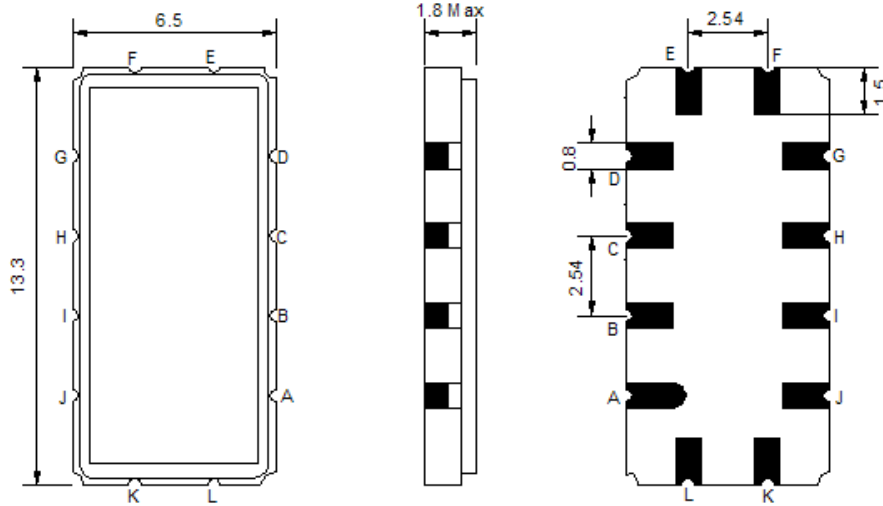

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

**Testing Environment**

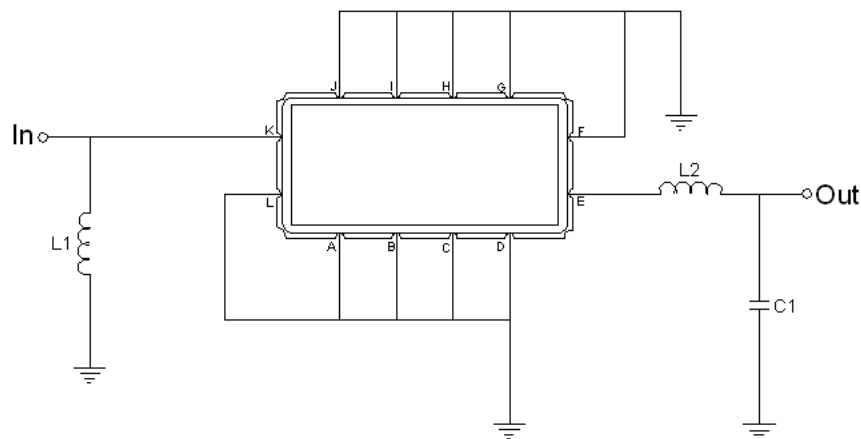

Test Fixture & Values	
Input	L1=39 nH ,
Output	L2=100 nH , C2=20 pF
Source/Load Impedance	50 Ω

### □ Frequency Characteristics

Frequency Response

