



Total Solution Provider in Saw Device

SL1407V

Low-Loss 140MHz IF SAW Filter
7.4MHz Bandwidth
Revision 1: 29. Oct. 2007



- Electrical Characteristics
 - Package Dimensions
 - Testing Environment
 - Frequency Characteristics
-

SAWNICS Inc.

460 Cheonheung-ri, Seonggeo-eup, Cheonan-si, Chungcheongnam-do, 330-836 / Korea.
Tel: +82 41 550 9372 / Fax: +82 41 550 9399 / www.sawnics.com

□ Electrical Characteristics

Maximum Ratings

Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-30	-	80
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	V			
Length x Width	mm ²	-	13.3 x 6.5	-
Height	mm	-	-	1.8


Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	139.85	140.0	140.15
Insertion Loss at Fo	dB	-	12.0	13.5
Amplitude Ripple Variation	dB _{p-p}	-	0.4	1.0
Group Delay Variation	nsec	-	60	100
Absolute Delay at Fo	μsec	-	0.96	-
Temperature Coefficient	ppm/°C	-	-20	-
Bandwidth at -1.0 dB	MHz	6.5	6.7	-
Bandwidth at -3.0 dB	MHz	7.4	7.6	-
Bandwidth at -40.0 dB	MHz	-	10.4	10.6
Bandwidth at -45.0 dB	MHz	-	10.8	11.0
Relative Attenuation:				
Lower sidelobe	dB	45	48	-
Upper sidelobe	dB	45	50	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).


Those impedances could be modified with different impedance values and/or structures, if necessary.

□ Package Dimensions

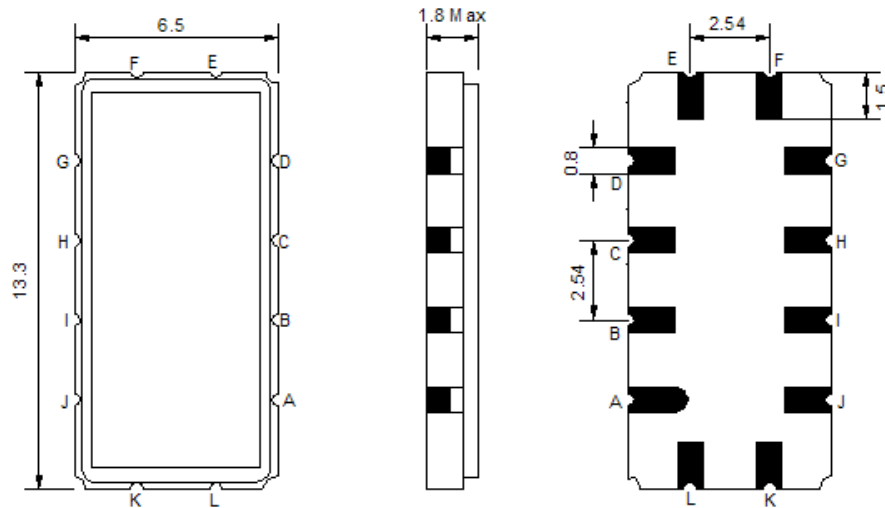

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

□ Testing Environment

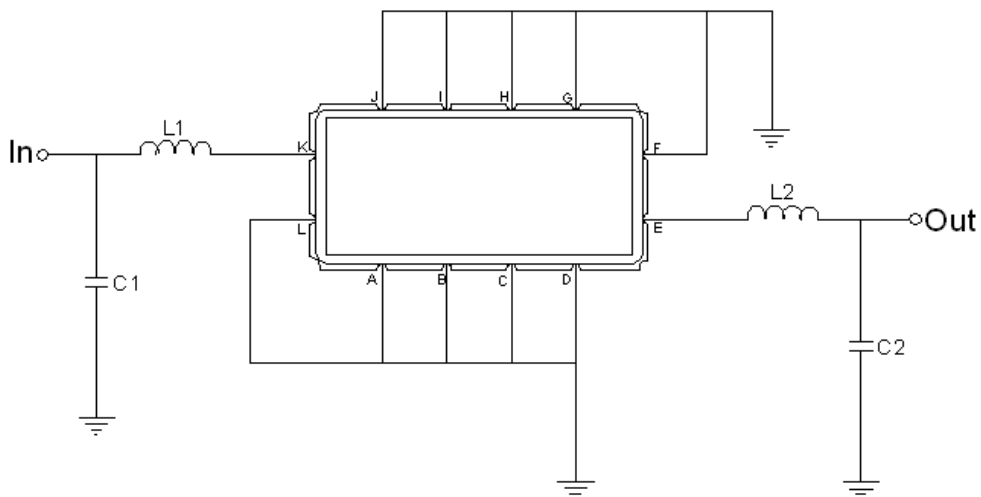

Test Fixture & Values	
Input	L1=47nH Q >40 ,C1=47pF
Output	L2=47nH Q.>40 , C2=47pF
Source/Load Impedance	50 Ω

□ Frequency Characteristics

Frequency Response

