



*Total Solution Provider in Saw Device*

---

# SL6010V

60.0MHz IF SAW Filter

23.55MHz Bandwidth

Revision 1: 29. Oct. 2007

---



- Electrical Characteristics
  - Package Dimensions
  - Testing Environment
  - Frequency Characteristics
- 

**SAWNICS Inc.**

---

460 Cheonheung-ri, Seonggeo-eup, Cheonan-si, Chungcheongnam-do, 330-836 / Korea.  
Tel: +82 41 550 9372 / Fax: +82 41 550 9399 / [www.sawnics.com](http://www.sawnics.com)

## □ Electrical Characteristics

### Maximum Ratings

Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-30	-	80
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	V			
Length x Width	mm <sup>2</sup>	-	13.3 x 6.5	-
Height	mm	-	-	1.8


### Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	60.0	-
Insertion Loss at Fo	dB	-	10.5	12.0
Amplitude Ripple Variation	dB <sub>p-p</sub>	-	0.6	1.0
Group Delay Variation	nsec	-	80	150
Absolute Delay at Fo	μsec	-	1.1	-
Temperature Coefficient	ppm/°C	-	-94	-
Bandwidth at -1.0 dB	MHz	10.0	10.3	-
Bandwidth at -3.0 dB	MHz	-	11.0	-
Bandwidth at -40.0 dB	MHz	-	13.5	14.0
<b>Relative Attenuation:</b>				
10 ~ 52.5 MHz	dB	40	-	-
67.5 ~ 120 MHz	dB	40	-	-
IN/OUT Return Loss at Fo	dB	-	-	-

**Notes :** (1) With Matching Network (Ref. Testing Environment Circuit as shown below).


Those impedances could be modified with different impedance values and/or structures, if necessary.

**□ Package Dimensions**

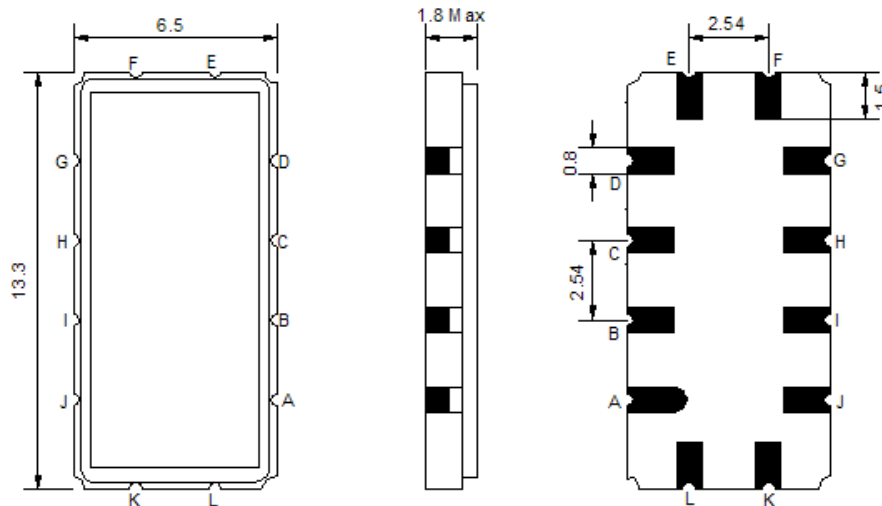

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

**□ Testing Environment**

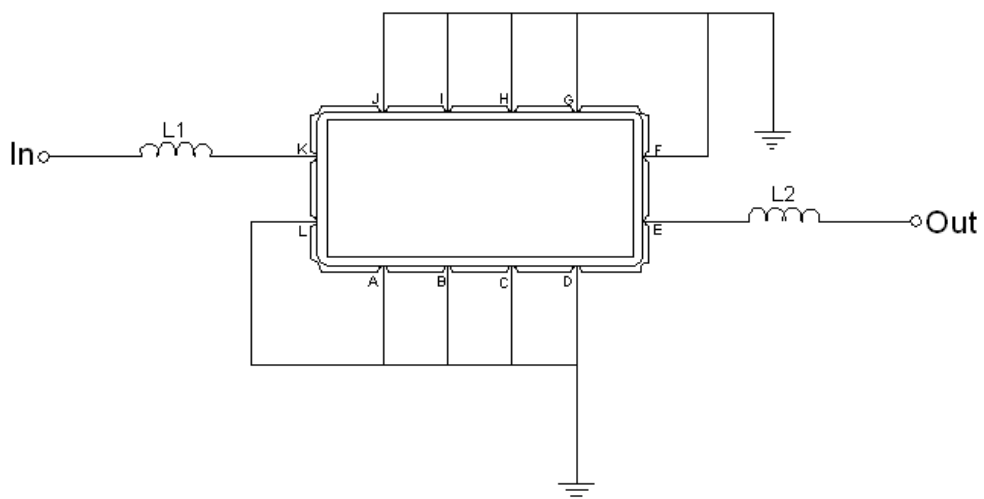

Test Fixture & Values	
Input	L1=270 nH , Q>40
Output	L2=270 nH , Q>40
Source/Load Impedance	50 Ω

### □ Frequency Characteristics

#### Frequency Response

