



Total Solution Provider in Saw Device

SD1433APB

SAW DUPLEXER For 1432.9MHz / 1480.9MHz
Revision 0: July ,2011



- Electrical Characteristics
 - Package Dimensions
 - Testing Environment
 - Frequency Characteristics
-

SAWNICS Inc.

460 Cheonheung-ri, Seonggeo-eup, Cheonan-si, Chungcheongnam-do, 330-836 / Korea.
Tel: +82 41 550 9372 / Fax: +82 41 550 9399 / www.sawnics.com



Electrical Characteristics

Maximum Ratings

Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-20	-	+70
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	0		
Maximum Input Power	dBm	28dBm > 50,000 Hours, CW tone(Ta= +50°C)		
Input Impedance (Antenna)	Ω	50		
Output Tx Impedance	Ω	50		
Output Rx Impedance	Ω	50		
Package type & size	PB			
Length x Width	mm ²	-	3.8 x 3.8	-
Height	mm	-	-	1.45

Electrical Specification

Tx_1432.9MHz		Specifications			
Parameters Description	Condition [MHz]	Unit	Minimum	Typical	Maximum
Insertion Loss	1427.9 ~ 1437.9	dB	-	1.8	3.2
Amplitude Ripple	1427.9 ~ 1437.9	dB _{p-p}	-	0.4	1.2
VSWR	1427.9 ~ 1437.9	-	-	1.5	2.1
Absolute Attenuation	1475.9 ~ 1485.9	dB	45	55	-




Rx_1480.9MHz		Specifications			
Parameters Description	Condition [MHz]	Unit	Minimum	Typical	Maximum
Insertion Loss	1475.9 ~ 1485.9	dB	-	2.1	3.2
Amplitude Ripple	1475.9 ~ 1485.9	dB _{p-p}	-	0.5	1.2
VSWR	1475.9 ~ 1485.9	-	-	1.5	2.1
Absolute Attenuation	1427.9 ~ 1437.9	dB	40	46	-

Rx → Tx		Specifications			
Parameters Description	Condition [MHz]	Unit	Minimum	Typical	Maximum
Isolation	1427.9 ~ 1437.9	dB	40	48	-
	1475.9 ~ 1485.9	dB	45	56	-

Notes : (1) With Matching Network .


Package Dimensions

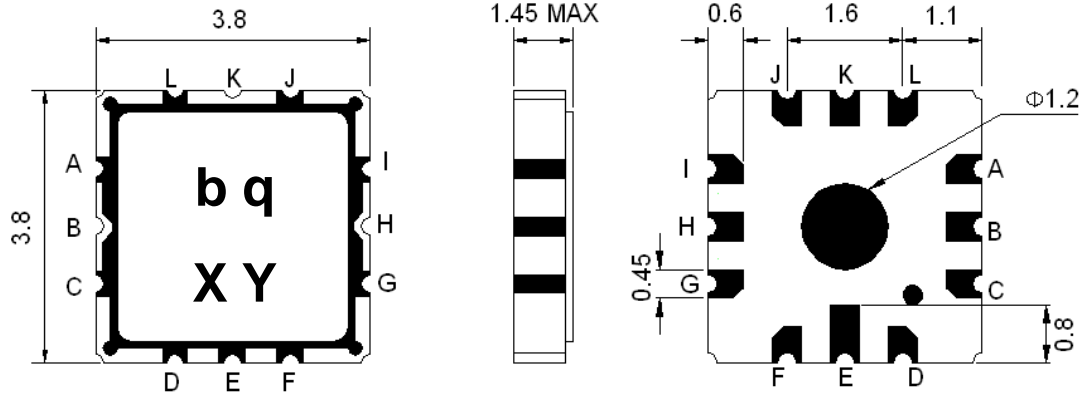

Marking Descriptions	
b	Wireless Application
q	Series Number
X	Date Code(Year)
Y	Date Code(Month)


Pin Description	
A, C, D, E, F, G, I, J, L	Ground
K	Ant
B	Tx (1432.9 MHz)
H	Rx (1480.9MHz)

Testing Environment

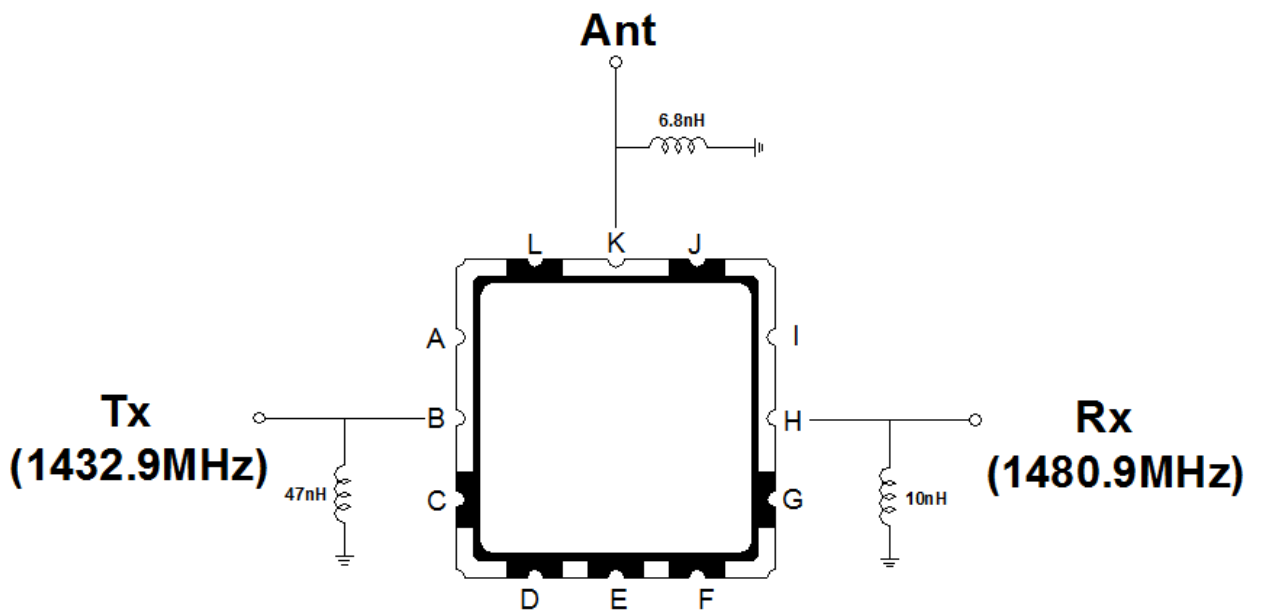


□ Frequency Characteristics


Tx to Ant

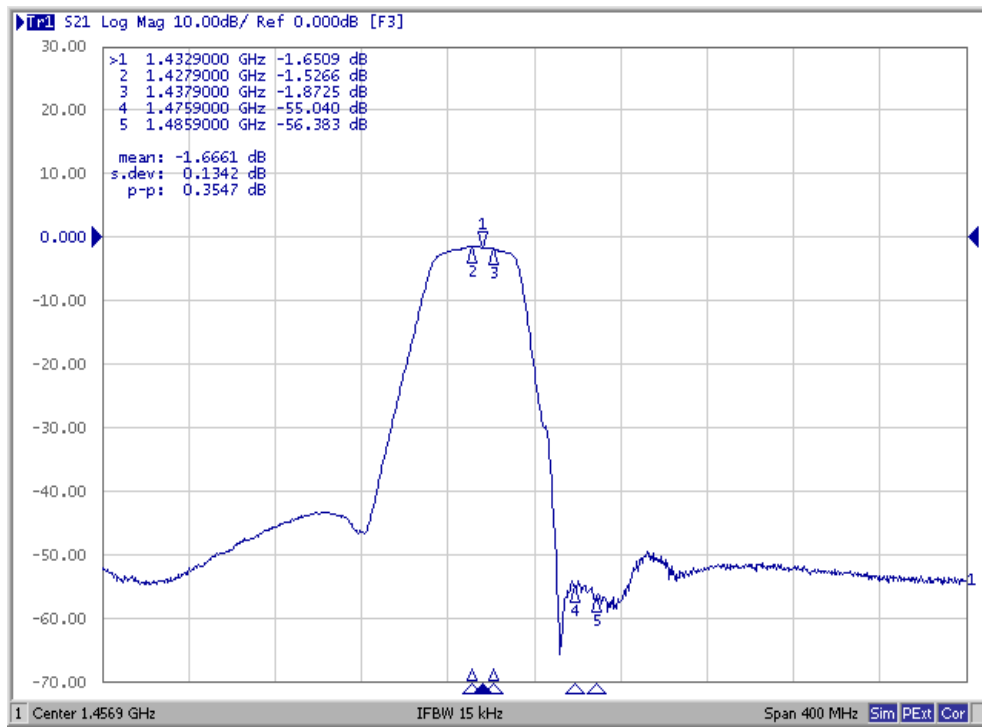

Ant to Rx

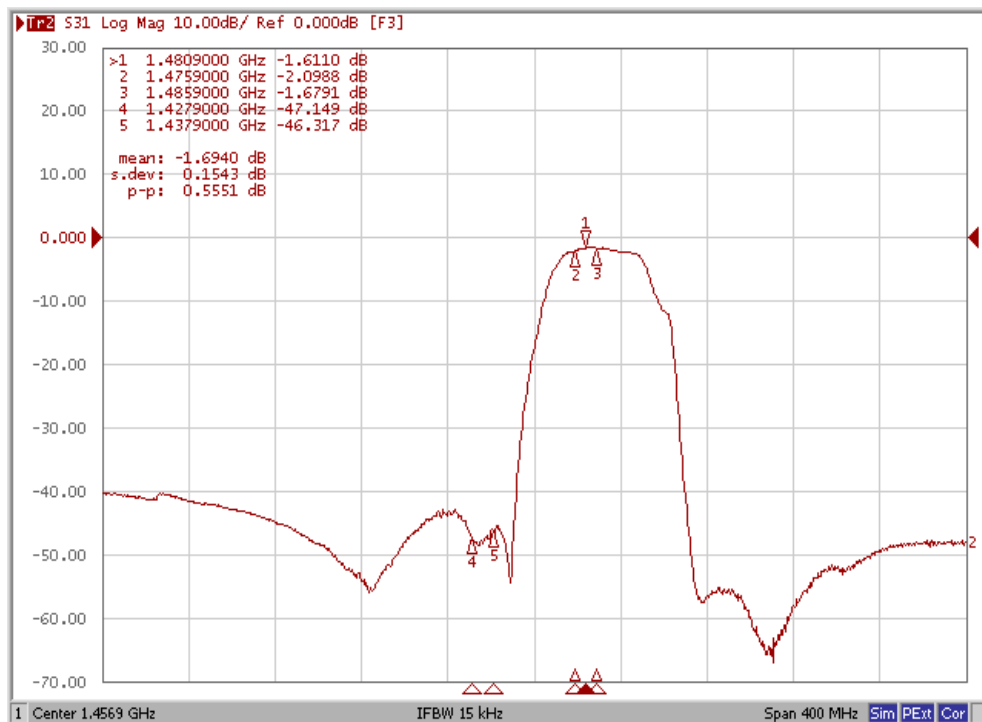


Isolation

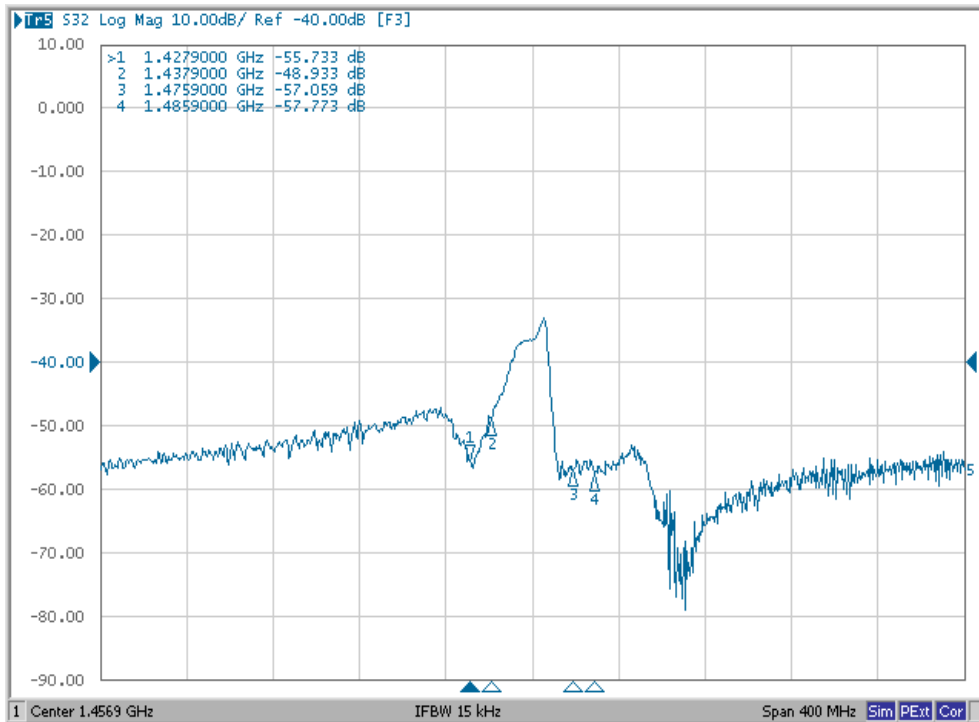


Tx Part

Smith Chart

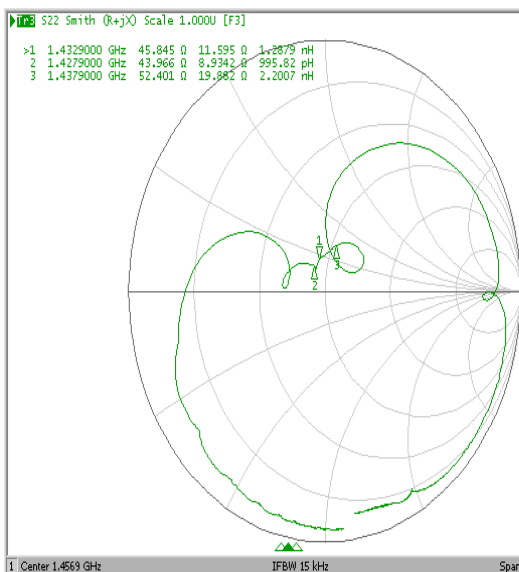

VSWR


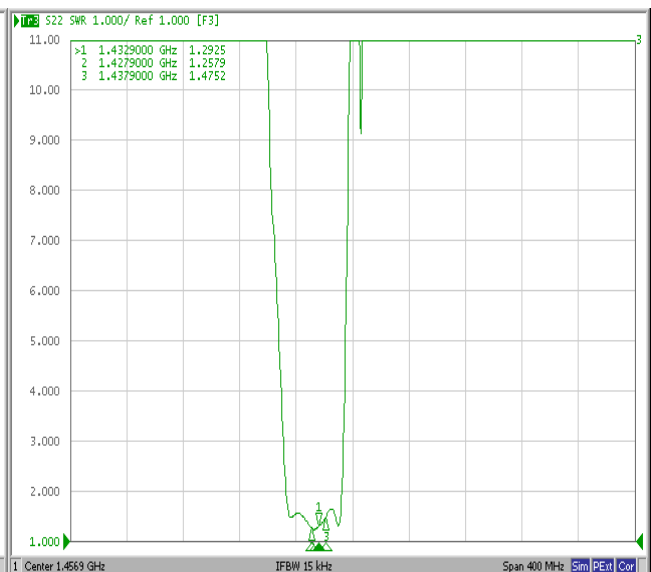




Rx Part

Smith Chart

VSWR

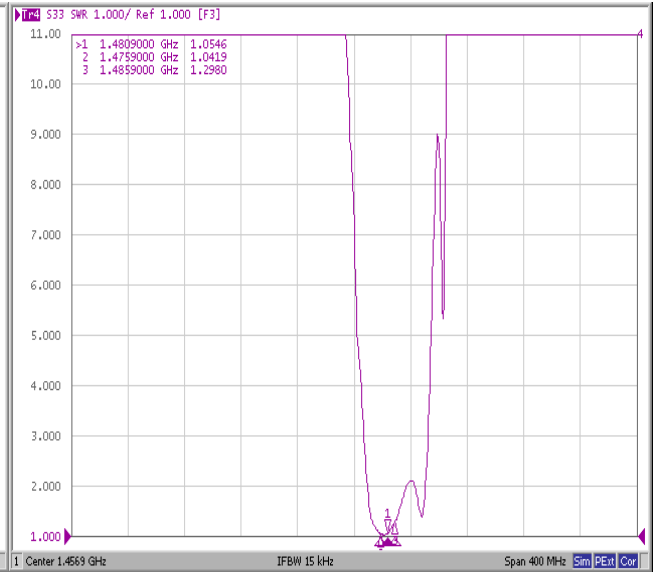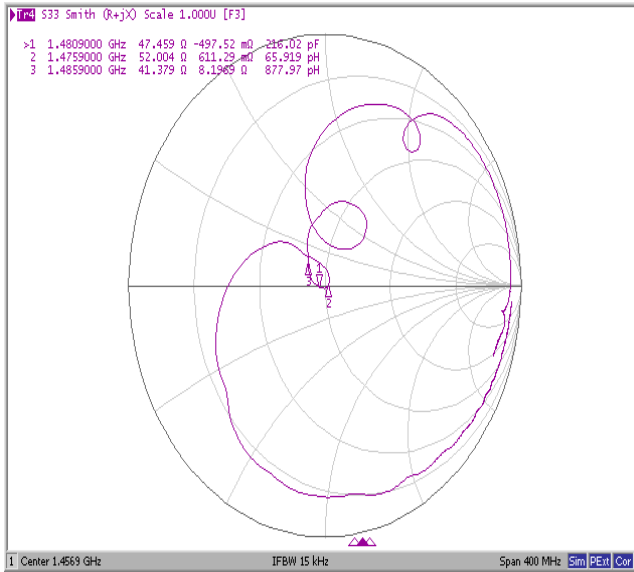

Antenna

Smith Chart

VSWR

