



*Total Solution Provider in Saw Device*

---

# SA2070BM

Wireless, RF SAW Filter  
Revision 0: March 2008



- Electrical Characteristics
  - Package Dimensions
  - Testing Environment
  - Frequency Characteristics
- 

**SAWNICS Inc.**

---

460 Cheonheung-ri, Seonggeo-eup, Cheonan-si, Chungcheongnam-do, 330-836 / Korea.  
Tel: +82 41 550 9372 / Fax: +82 41 550 9399 / [www.sawnics.com](http://www.sawnics.com)

**□ Electrical Characteristics**

**Maximum Ratings**


Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-32	-	+85
Storage Temperature Range	°C	-50	-	+85
Maximum DC Voltage	V	-	-	5
Maximum Input Power	dBm	-	-	20
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	M			
Length x Width	mm <sup>2</sup>	-	3.0 x 3.0	-
Height	mm	-	-	1.3

**Electrical Specification**

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	2070.0	-
Insertion Loss within 2068.0 ~ 2072.0 MHz	dB	-	2.1	4.0
<b>Attenuation:</b>				
1940.0 ~ 1960.0 MHz	dB	20	32	-
2130.0 ~ 2150.0 MHz	dB	40	52	-

**Notes :** (1) No Matching Network (Ref. Testing Environment Circuit as shown below).


**Package Dimensions**

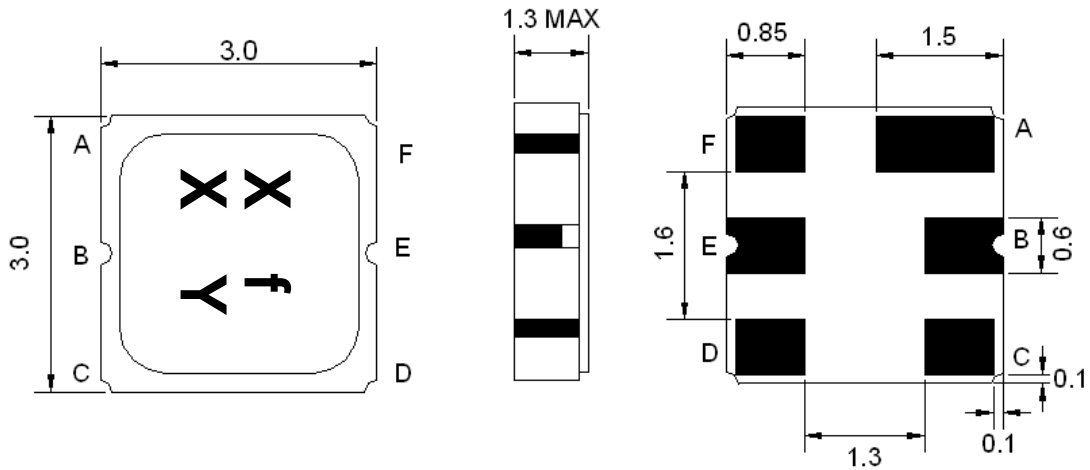

Marking Descriptions	
X	Wireless Application
f	Series Number
X	Date Code(Year)
Y	Date Code(Month)

Pin Description	
A, C, D, F	Ground
E	In
B	Out

**Testing Environment**

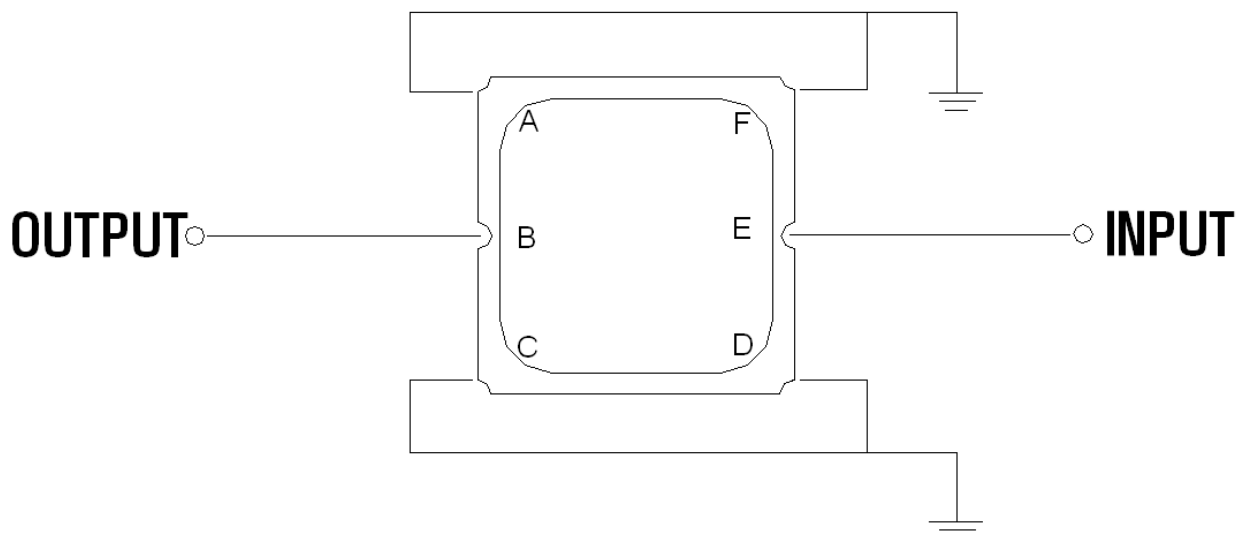

Source & Load Impedance: 50 Ω

## □ Frequency Characteristics

Frequency Response

