



*Total Solution Provider in Saw Device*

---

# SL12024AV

120.0 MHz IF SAW Filter  
24.21MHz Bandwidth  
Revision 0: 28. May. 2009.



- Electrical Characteristics
  - Package Dimensions
  - Testing Environment
  - Frequency Characteristics
- 

**SAWNICS Inc.**

---

460 Cheonheung-ri, Seonggeo-eup, Cheonan-si, Chungcheongnam-do, 330-836 / Korea.  
Tel: +82 41 550 9372 / Fax: +82 41 550 9399 / [www.sawnics.com](http://www.sawnics.com)

## □ Electrical Characteristics

### Maximum Ratings

Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-10	-	60
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	V			
Length x Width	mm <sup>2</sup>	-	13.3 x 6.5	-
Height	mm	-	-	1.8


### Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	120.0	-
Insertion Loss at Fo	dB	-	13.50	15.50
Amplitude Ripple within fo ±11.2 MHz	dB <sub>p-p</sub>	-	0.36	0.80
Group Delay Variation within fo ±11.2 MHz	nsec	-	22	35
Absolute Delay at Fo	µsec	-	0.96	-
Temperature Coefficient	ppm/°C	-	-86	-
Bandwidth at -1.0 dB	MHz	23.90	24.21	-
Bandwidth at -3.0 dB	MHz	-	25.16	-
Bandwidth at -40.0 dB	MHz	-	28.87	29.20
<b>Relative Attenuation:</b>				
Lower sidelobe	dB	40	45	-
Upper sidelobe	dB	40	45	-

**Notes :** (1) With Matching Network (Ref. Testing Environment Circuit as shown below).

Those impedances could be modified with different impedance values and/or structures, if necessary.


### Package Dimensions

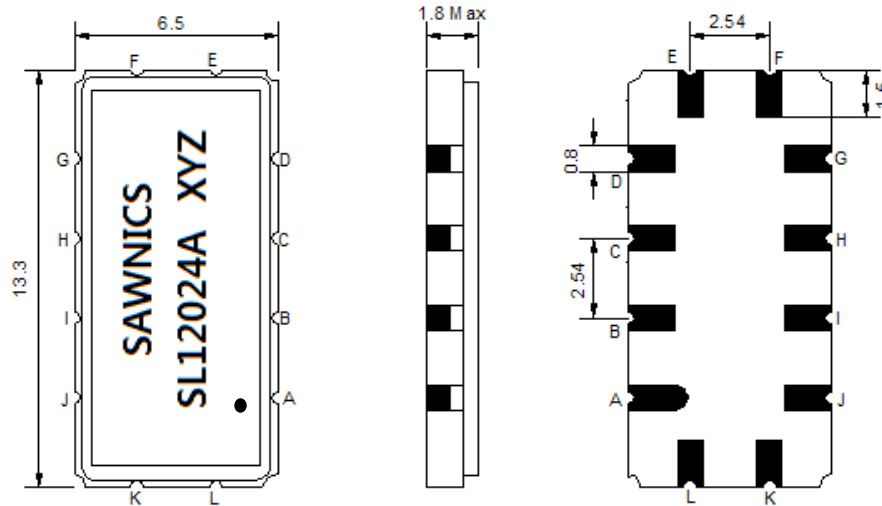

- ① SAWNICS: Brand
- ② SL12024A: Model Name
- ③ X : Date Code (Year)
- ④ Y : Date Code (Month)
- ⑤ Z : Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

### Testing Environment

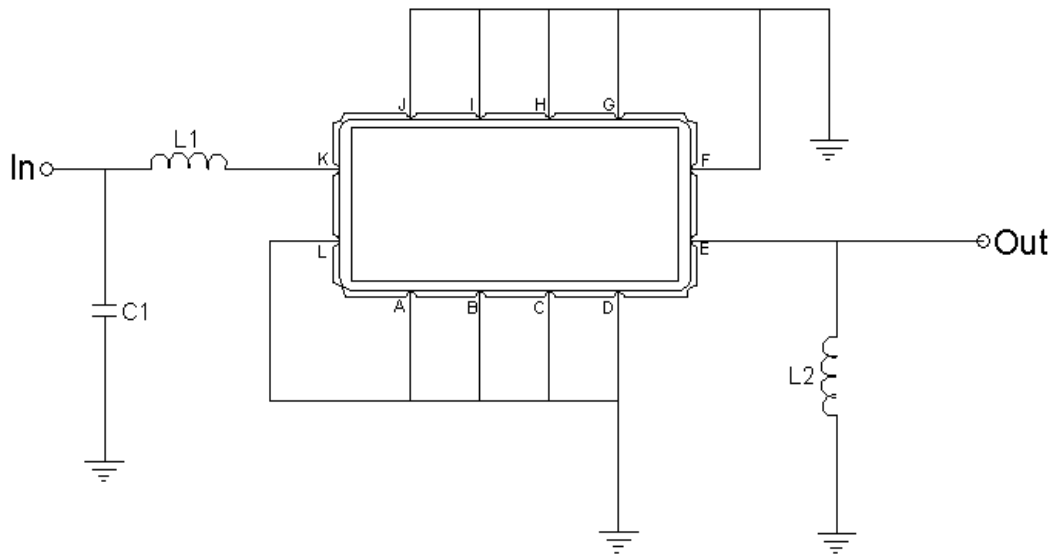


Test Fixture & Values	
Input	L1=39nH, C1=30pF
Output	L2=39nH,
Source/Load Impedance	50 Ω




**Frequency Characteristics**

**Frequency Response**


**Bandwidth at -1.0 dB**

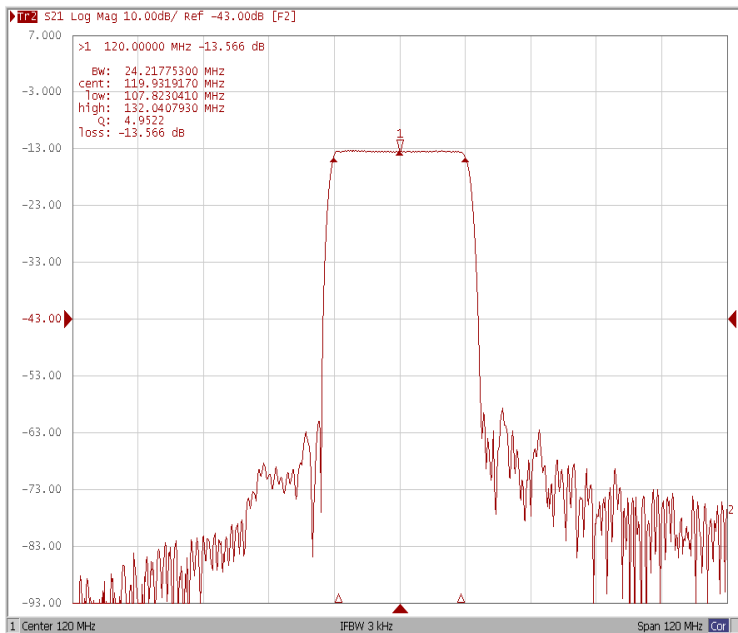


**Bandwidth at -3.0 dB**

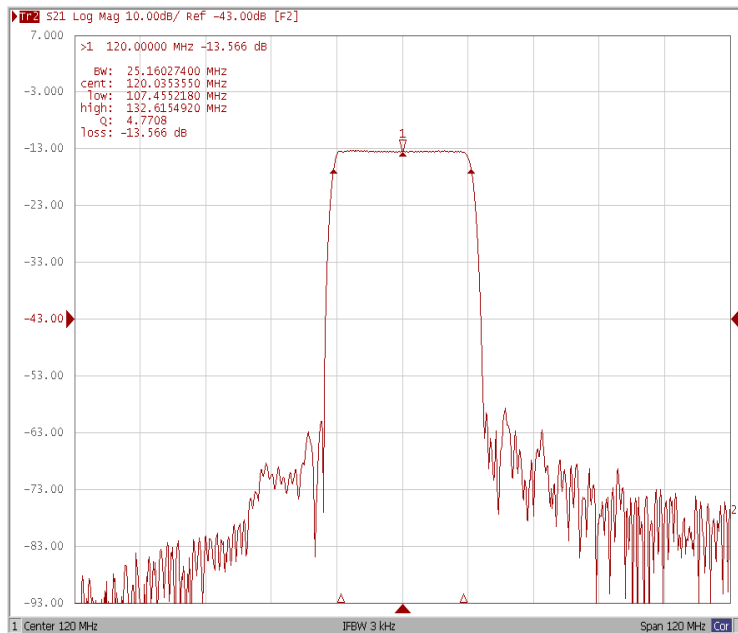

**Bandwidth at -40.0 dB**

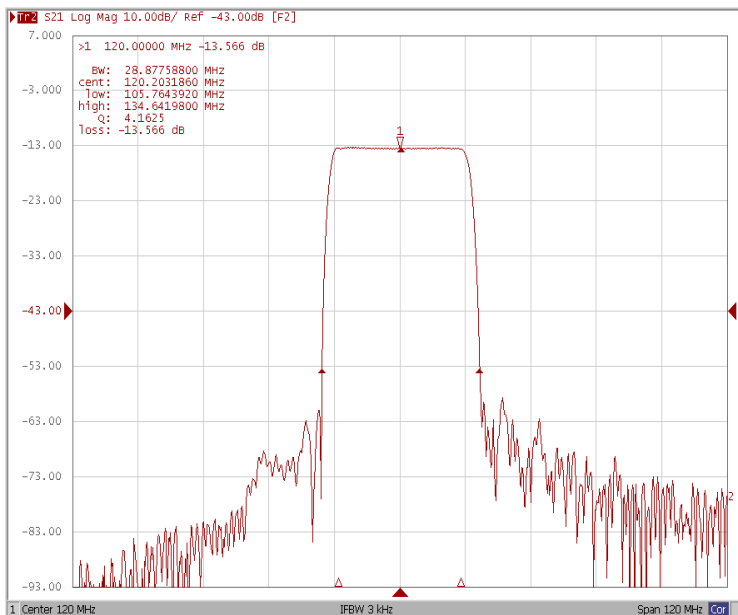


**Wide-Band**

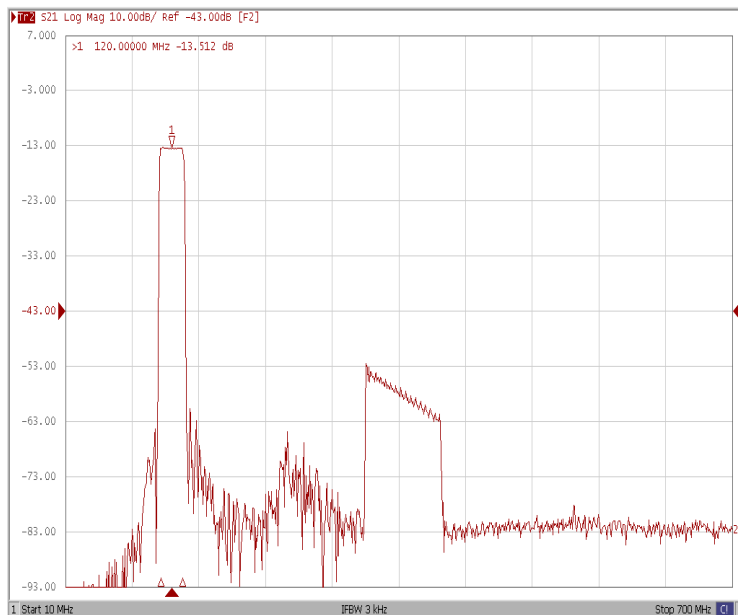


### Frequency Characteristics

#### Frequency Response


Ripple Variation Fo±11.2MHz

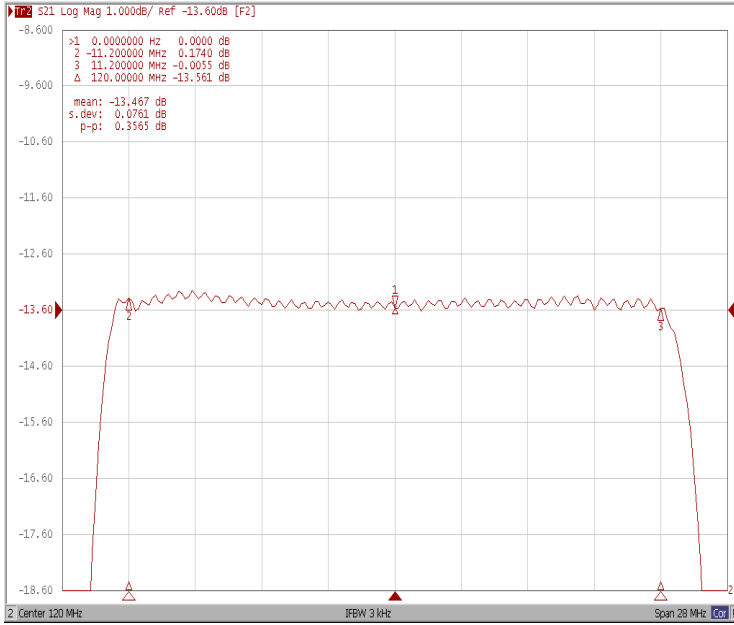

Group Delay Variation Fo±11.2MHz

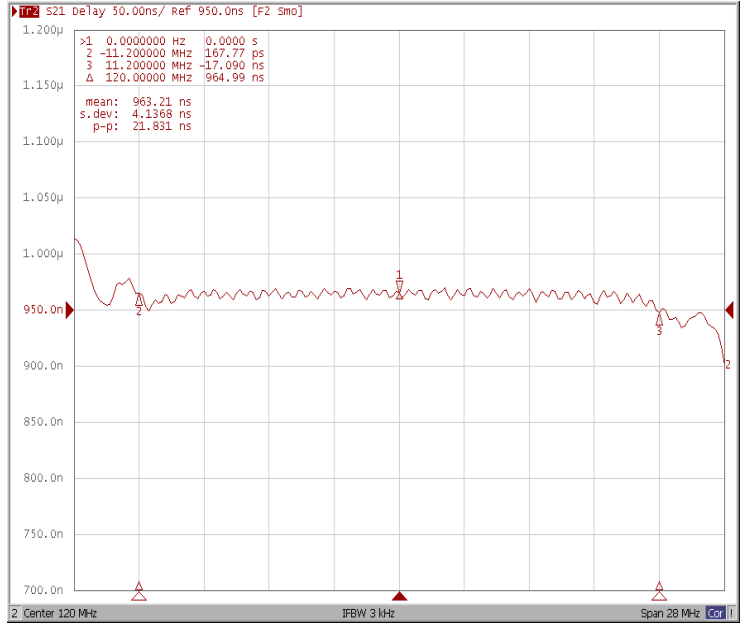

Smith Chart

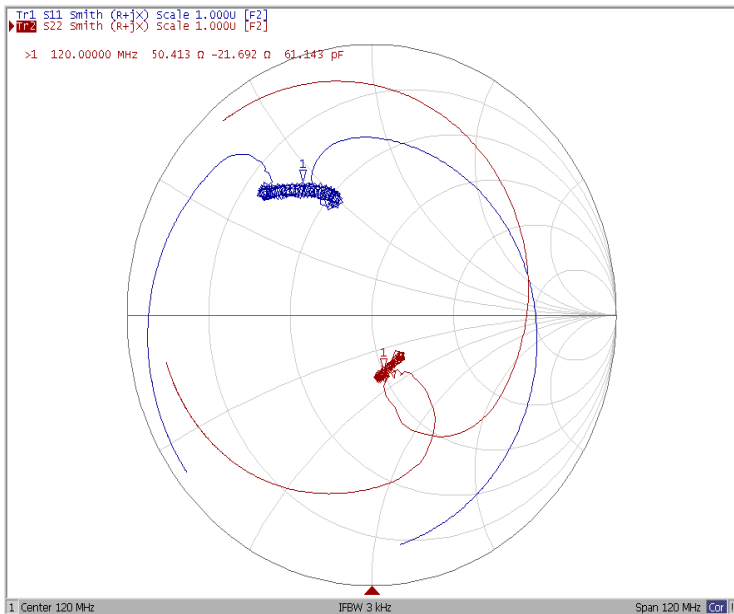

SWR

